

Kellems® Wire Management Products  
PG and Metric Threaded Deluxe Cord Grips  
Deluxe Cord Grips



Features

- Aluminum Fiting
- Stainless steel mesh is corrosion resistant
- Neoprene bushing is oil and watertight

Ordering Information

| Description                              | Hub Size | UPC          | Catalog Number |
|------------------------------------------|----------|--------------|----------------|
| Straight Metric Male Thread, Liquidtight | M25      | 783585327709 | 074M251248     |

Listings


UL Listed  
CSA Certified

Specifications

|          |                 |
|----------|-----------------|
| Strand   | Stainless Steel |
| Body     | Aluminum        |
| Nut      | Aluminum        |
| Bushings | Neoprene        |

Performance

|                        |                                                                                                             |
|------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Environmental</b>   |                                                                                                             |
| Flammability           | UL 94HB (Strand grip), UL 94V-2 (Fitting)                                                                   |
| Hazardous Locations    | Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C |
| Operating Temperatures | –30°F to +240°F (–34°C to +115°C)                                                                           |
| Wet Locations          | Suitable for use in wet locations when used with a listed sealing ring between box and fitting              |

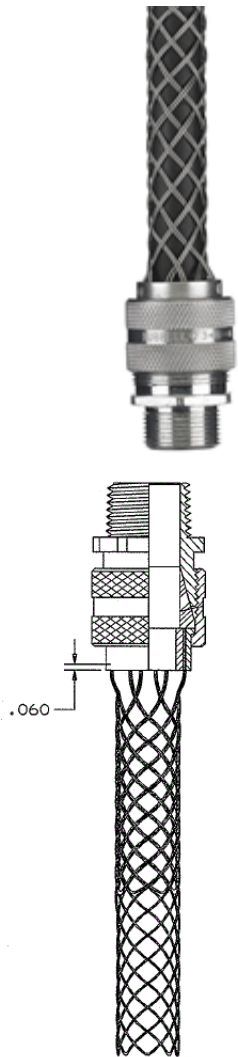

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

