



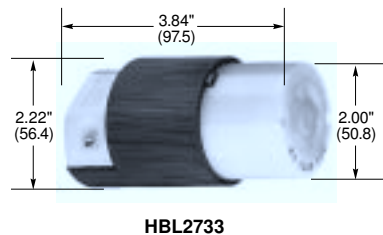


TWIST-LOCK® Devices

3 Pole, 4 Wire Grounding

30 Ampere, 3Ø 480 and 3Ø 600 Volts AC

Receptacles, INSULGRIP® Connector Bodies, Flanged Devices and Plugs

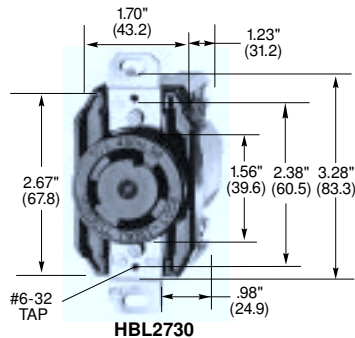

Single Flush Receptacles, Back and Side Wired

Description	Catalog Numbers	
Black nylon face.	HBL2730	HBL2740
Black nylon face.	HBL2730CN*	HBL2740CN*



Insulgrip Connector Bodies IP20 SUITABILITY

Description	Catalog Numbers	
Black and white nylon.	HBL2733	HBL2743
Black and white nylon.	HBL2733CN*	HBL2743CN*
Corrosion resistant, yellow nylon.	HBL27CM33	HBL27CM43

Notes: Cord clamp range .595 to 1.150" (15.1 to 29.2).

Insulgrip Flanged Receptacles

Description	Catalog Numbers	
Nylon casing, backwired.	HBL2736	HBL2746



Insulgrip Plugs IP20 SUITABILITY

Description	Catalog Numbers	
Black and white nylon.	HBL2731	HBL2741
Black and white nylon.	HBL2731CN*	HBL2741CN*
Corrosion resistant, yellow nylon.	HBL27CM31	HBL27CM41

Notes: Cord clamp range .595 to 1.150" (15.1 to 29.2).
See page B-65 for Add-A-Shroud™ kit.

Insulgrip Flanged Inlets

Description	Catalog Numbers	
Nylon casing, backwired.	HBL2735	HBL2745

Notes: *Catalog numbers listed above with suffix CN have combination Robertson/slotted head screws.
HP ratings listed above are AC only.
See pages B-70, B-72 and B-73 for accessories.
Only receptacles and plugs are HP rated and up to 480V AC only.
For technical information see page B-75.
See page B-66 for a switched enclosure.