




# IC Sockets

## Modular Single Row

- Connectors can be cut to smaller sizes.
- Socket accepts mating pin  $\varnothing 0.40$  to  $0.56\text{mm}$ , using four finger Beryllium Copper contact technology.
- Please consult Technical Drawings online for further specifications.

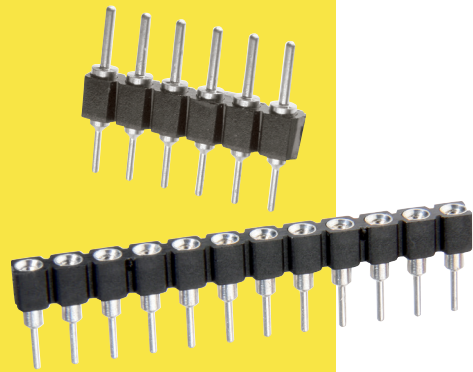



### FEMALE

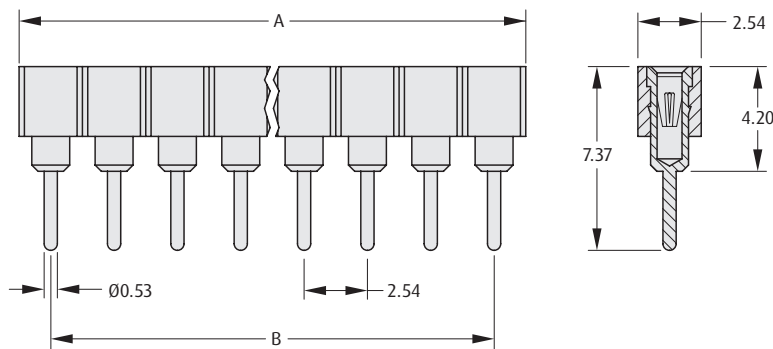

### CALCULATION

|          |                                            |
|----------|--------------------------------------------|
| <b>A</b> | $2.54 \times \text{No. of contacts}$       |
| <b>B</b> | $2.54 \times (\text{No. of contacts} - 1)$ |

### MALE

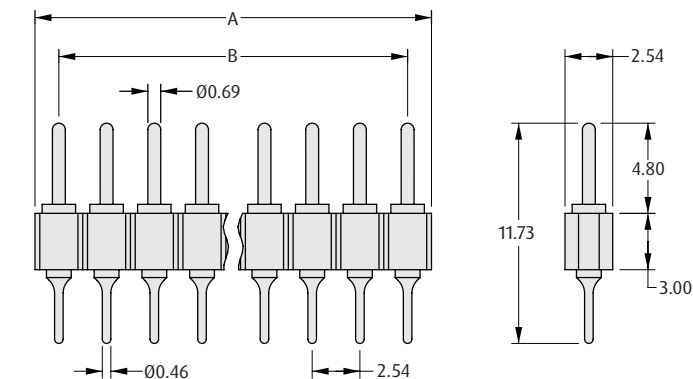

### HOW TO ORDER

**D01 - 99 X XX XX**

#### SERIES CODE

#### TYPE

|          |        |
|----------|--------|
| <b>7</b> | Female |
| <b>2</b> | Male   |

#### FINISH

|           |                     |
|-----------|---------------------|
| <b>42</b> | Gold + Tin (Female) |
| <b>46</b> | Tin (Male)          |

#### NO. OF CONTACTS

**20, 32**

All dimensions in mm.