




Precision Wire Stripping

- [Heat Shrinks](#)
- [Heat Shrink Splices](#)
- [Heavy Wall Heat Shrinkable Tubing](#)
- [Medium Wall Heat Shrinkable End Caps](#)
- [Thin Wall Heat Shrinkable Tubing](#)**
- [Thin Wall Heat Shrinkable Tubing Disks](#)

HT SHK 100 FT LGTH 1.0 IN OD 46-330

Add to Watchlist

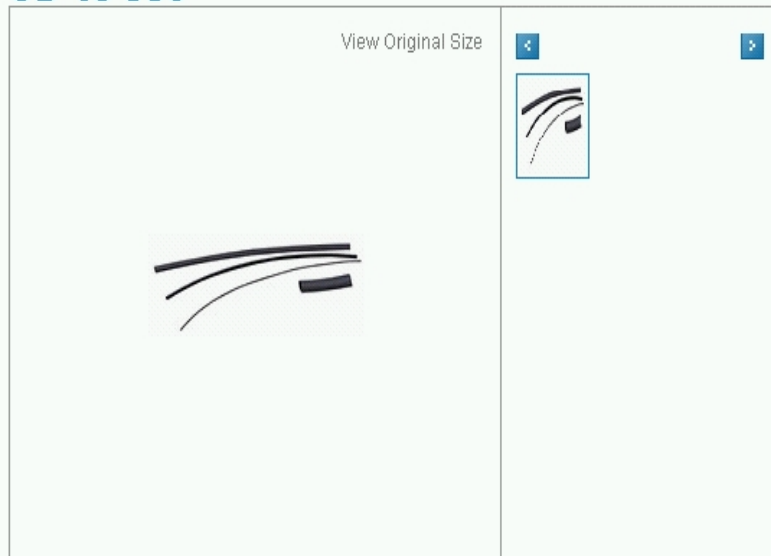

Thermo-Shrink® Thin-Wall Heat Shrink, 100 feet Length, 1.0 inches OD, 2/0-500 MCM

Category Features

Related Products

- TS-46 irradiated cross-linked polyolefin with 2:1 standard shrink ratio
- Shrink temperature of 120 degrees C
- Forms tough, smooth insulated covering resistant to fluids and solvents
- Flame-retardant material

[Print](#)

[Recommend](#)

[Newsletter](#)

Subscribe to our free
Newsletter.

[Subscribe](#)