



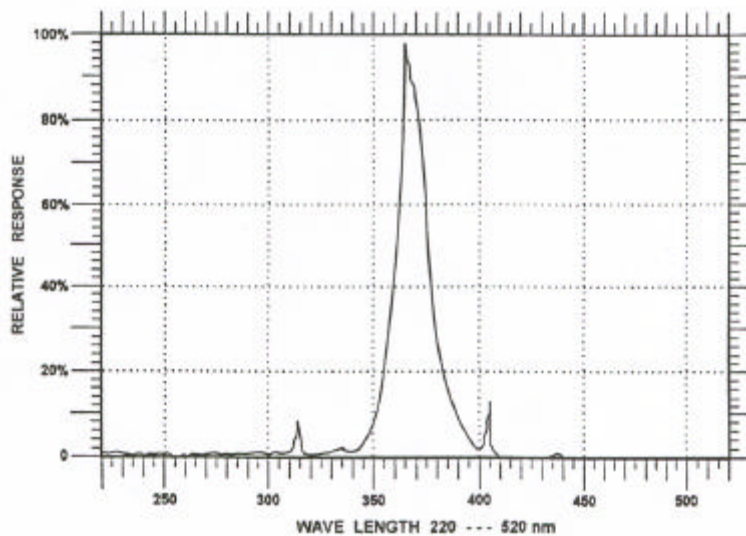

UV LAMP
SPECTRAL OUTPUT

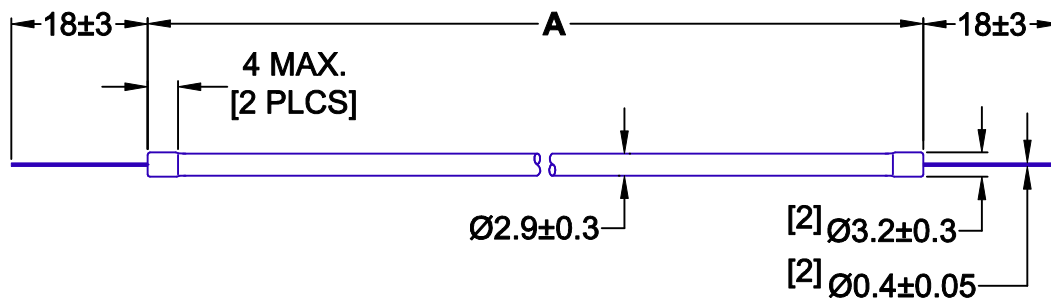

JKL PART NUMBER	LENGTH (A) +/- 2mm	LAMP WATTS	STARTING VOLTAGE VS (Vrms)	OPERATING VOLTAGE VL (Vrms)	OPERATING CURRENT IL (mAmps)	OUTPUT Uw/CM2 @1"	*RATED LIFE (HRS)
BF325-UV1	25mm	0.35	350	140	2.5	.20	8,000
		0.70	350	140	5.0	.30	5,000
BF350-UV1	50mm	0.49	500	195	2.5	.20	10,000
		0.98	500	195	5.0	.30	6,000
BF366-UV1	66mm	0.54	550	215	2.5	.20	10,000
		1.10	550	215	5.0	.30	6,000
BF3100-UV1	100mm	1.30	650	260	5.0	.25	10,000
BF3120-UV1	120mm	1.40	700	280	5.0	.25	10,000
BF3130-UV1	130mm	1.50	720	300	5.0	.25	10,000
BF3150-UV1	150mm	1.68	750	335	5.0	.25	10,000
BF3221-UV1	221mm	2.25	1075	450	5.0	.25	10,000
BF3237-UV1	237mm	2.50	1150	500	5.0	.25	10,000
BF3240-UV1	240mm	2.50	1150	500	5.0	.25	10,000

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE OUTPUT BECOMES 50% OF THE INITIAL RATING.

ALL SPECIFICATIONS ARE TYPICAL WITH THE LAMP OPERATING AFTER STABILIZATION, AT AN AMBIENT TEMPERATURE OF 25°C.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0		JKL COMPONENTS CORPORATION TITLE MINIATURE 3.2mm 365nm UV-CCFL				
E	ADD PART NUMBER BF3221-UV1	6/18/03	DRAWN BY		APP'VD BY	DATE	SIZE	FSCM NO.	DRAWING NO.	BF 3-UV1	
D	ADD PART NUMBER BF3237-UV1	4/7/00	L. WENGSTROM		F.D.	6/18/03	A	55335			
C	ADD PART NUMBER BF366-UV1	8/20/99					SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
B	CORRECT OUTPUT POWER	3/1/99					NONE	6/3/98	6/18/03	E	1 OF 1
A	ADD BF3130-UV1	11/11/98									
RELEASED - CANCEL ALL BF-3mm Ø UV1 DRAW'G			6/3/98								
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING -		MANUAL REVISIONS NOT PERMITTED						