
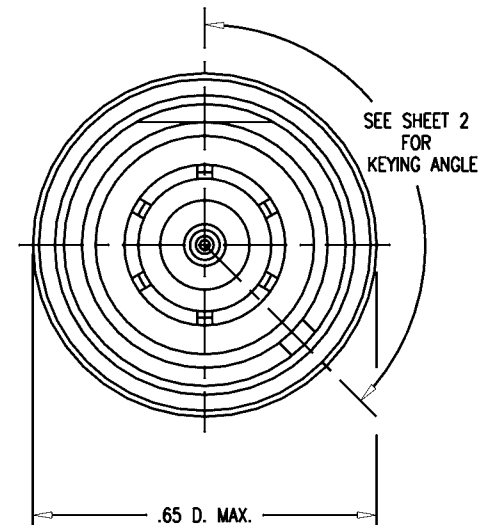


GSD

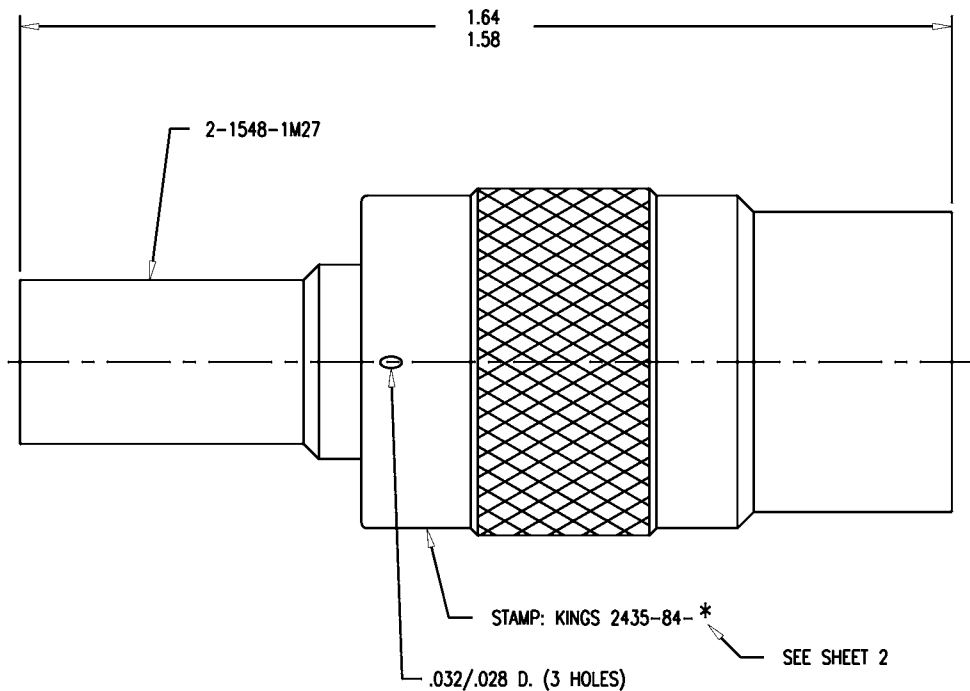

NOTES:

1. FOR USE WITH BOEING S280W503-3 & ADAMS RUSSELL FC20Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-1.
3. FOR CRIMPING USE DIE KTH-2216.
4. INTERFACE PER MIL-STD-348, FIG. 313-1 (AS APPLICABLE).
5. CENTER CONTACT (1-569-35MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 2435-84-*
XX XX (DATE CODE) SEE SHEET 2
7. MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., ZZ-R-765
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
C-RING: PHOS. BRONZE, QQ-B-750
OUTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
8. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz

2435-84-* (SHT 1 OF 2)

REVISIONS

ISSUE	CHANGES	
0	ER JCA	34659 05/19/93
1	CN JLA	39226 E 02/16/05

JCA3771

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

PLUG, KEYED, TNC

DRAWN	JCA	DATE	04/26/93
DESIGN	JT	DATE	04/27/93
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2435-84-*
(SHEET 1 OF 2)

GSD