



DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

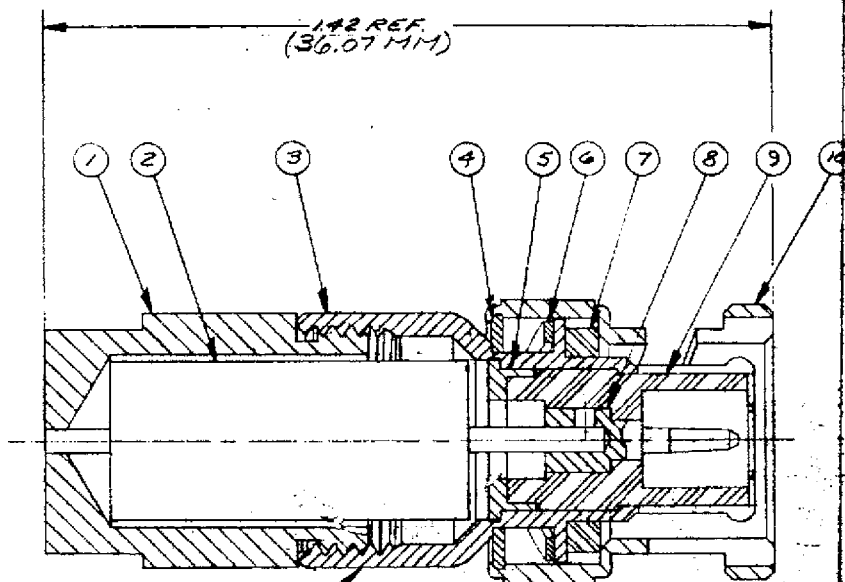

STAMP: KINGS KC-89-163
50Ω 2W

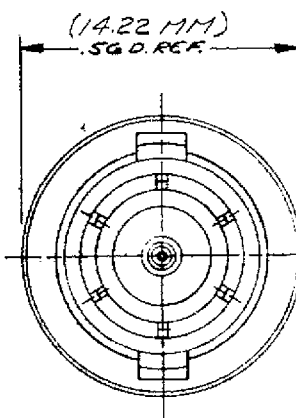

S=D

S=D

S=D

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
3 PLACE DECIMALS ± .004
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX. ANGLES ± 0° 30'
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RM_A MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

11	A/R	LOCTITE 290
10	1	BAYONET SLEEVE
9	1	INSULATOR
8	1	BNC CONTACT M
7	1	GASKET
6	1	SPRING WASHER
5	1	BUSHING
4	2	CAM LEVER
3	1	BODY
2	1	RESISTOR
1	1	CAP

ITEM	REQ'D	DESCRIPTION	PART NO.
------	-------	-------------	----------

REVISIONS

ISSUE	CHANGES
0.	ER 13064 JL 8 JAN 74
1	CN 14940A MJB 22 OCT 75
2	CN 16496C GA 19 OCT 76
3	CN 24113 C JEP 4 JAN 83

KC-89-163

S=D

USED ON:

REP:

FINISH:

SPEC.

MATL.

SPEC.

BNC TERMINATION
50Ω, 50, 2W.

DRAWN JL DATE 8 JAN 74

APPR. LI DATE 8 JAN 74

KINGS ELECTRONICS
48 MARLBOROUGH ROAD
TUCKAHOE, N. Y. 10787

KC-89-163