Top Options - **UPDATED!**

Top options accept 41/2', low-profile 6' or 10' fans for Active thermal management. Vented pagoda tops maintain enclosure temperatures through natural convection while minimizing the amount of and debris that can fall into the rack, and add\$/2" to the top of the rack. Solid, slot pattern vented, vented and cable ladder adapter tops also available. All tops (excluding PMV and MWLA) include a removable two space service plate. Allows removal of top without disrupting cable bundles.

Fits WR, WRK, MRK, VRK, VMRK, DRK Part #	Fits WMRK, ERK, SCRK Part #*	Style
MW-4FT	ERK4FT*	mounts four (MW4FT) or three (ER4FT) 41/2' fans
MW-6FT	ERK-6FT	mounts three (MW6FT) or two (ERI6FT) 6 fan
MW-10FT	ERK-10FT*	mounts one 10 fan
MW-VT	ERK-VT*	slot pattern vented
MW-DT <i>NEW</i>	ERK-DT NEW	Duct cool adapter
MW-LVT		large perf vented, 64% open area
MW-ST	ERK-ST*	solid
MW-LA		accepts 6, 9" and 12cable ladders
MV-PVTxx		vented pagoda top; MRK, VRK, VMRK only

× uffix

×

Integrated Fan Tops

Universal Front Doors

powder coat finish. Includes keylock.

Part # (fits WRK/ MRK/ VRK/ VMRK/ ERK/ DWR/ SR)


Offered in lightly smoked plexiglass, fully vented, vented plate. I large perforated vented and solid configurations. Beveled corners provide a stylistically modern appearance, while hinging either lef

right. Large perf door has 68% open area, regular perf vented doors have 22% open area. Black t

FD-54 PFD-44 P	Plexi Door PFD-54 PFD-46	64% Open Area Door	25% Open Area Door VFD-54	Plexi Vented Door	Rack spaces
FD-46 P	PFD-46		VFD-54		
FD-44 P				- [54
			VFD-46	-	46
FD-40 P	PFD-44	LVFD-44	VFD-44	PVFD-44	44
	PFD-40	LVFD-40	VFD-40	-	40
FD-37 P	PFD-37	LVFD-37	VFD-37	-	37
FD-35 P	PFD-35	LVFD-35*	VFD-35	-	35
FD-27 P	PFD-27		VFD-27	-	27
FD-24 P	PFD-24	LVFD-24*	VFD-24	-	24
FD-21 P	PFD-21	LVFD-21*	VFD-21	-	21
FD-18 P	PFD-18	LVFD-18*	VFD-18	-	18
FD-16 P	PFD-16	LVFD-16*	VFD-16	-	16
FD-12 P	PFD-12	LVFD-12*	VFD-12	-	12
FD-10 P	PFD-10	LVFD-10*	VFD-10	-	10
Black finish is sta		anite gray finis	sh suffix with 'G	Υ'	

SPN-54-36 fits VMRK-5436 only (4 pcs.) fits MRK-4436 and DRK19436

an internal locking kit. Black textured powder coat finish. Sold in pairs.

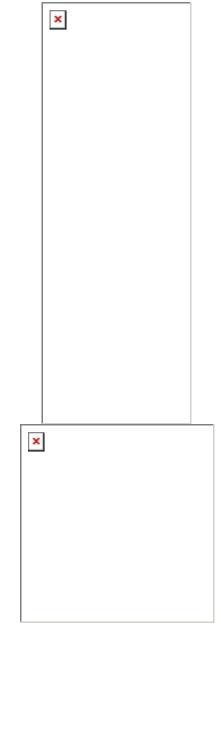

×

Rackpsaces

44

40

35

27

21

18

Fully vented split rear door saves space when working behind the rack

×

×

CBS-WRK -32

SPN-44-36 SPN-40-36

SPN-54-312

Part #

Fits WRK, MRK, DRK, VRK, VMRK

fits VMRK-54 only (4 pcs.)



Base

CBS-MRK-31R

CBS-MRK-26R

44 rackspace WRK

SA, WRK, MRK,

VRK

42 rackspace WMRI

44 rackspace DRK

Additional 6" fan fo

MW-CFRD

Part #

CBS-MRK-31

CBS-MRK-26

CBS-DRK-31

CBS-DRK-36

MW-CFRD-44

MW-CFRD-42

MWCFRD-FKIT

D-CFRD-44

×

electrical boxes. Fits inside rack.

Caster Base

CBS-WRK-32 CBS-WRK-32R WRK 32" deep BS-WRK-32 WRK 27" deep CBS-WRK-27 CBS-WRK-27R BS-WRK-27 CBS-MRK-36 CBS-MRK-36R MRK 36" deep BS-MRK-36 CBS-MRK-42 BS-MRK-42 MRK 42" deep

Inner Platform Base

Part #

BS-MRK-31

BS-MRK-26

45

MW-CFRD-1/2PNL-

44

MW-CFRD-1/2PNL-

42

DCFRD-1/2PNL-44

×

Fits

MRK 31" deep

MRK 26" deep

DRK 31" deep

DRK 36" deep

1,320

1,320

1,320

220


MW - CLVRD - 44

With a 1300 lb. capacity, our commercial grade caster bases are equipped with heavy dutyking 3' swivel wheels and are UL listed in the US and Canada. NEW fine floor caster bases now available

700 lb. weight capacity. Each base comes with its wheels preinstalled to save time, fits inside rack raises total rack height only 3/4" (CBSK raises the rack3/4"). Caster base works with LF leveling

	CBS-ERK-20	CBS-ERK-20R	-	ERK 20" deep			
	CBS-ERK-25	CBS-ERK-25R	-	ERK 25" deep			
	#96-936 <u>Download or view PDF</u> file						
[:	High CFM Split Rear Doors - NEW! Protect equipment from the damaging effects of heat from servers, NAME DVR s with the adjustable 6 fan High CFM Rear Door. This cupboard style split rear door pulls hot air from the reather cabinet and directs it up towards return air ducts. Fan placement is adjustable for optimal airfluing to 10 additional fans can be added for 3,520 CFM of free air movement. Two adjustable half blipanels included for versatile fan arrangement. Additional half blank panels are available for greate control of fan placement.						
	Part #	Fits	Additional ½ Blank Panels (qty. of 4)	Free Air CFM			
	MW-CFRD-45	45 rackspace WMRI	MW-CFRD-1/2PNL-	1,320			

Directs airflow upward towards return air ducts MW - CFRD #96-01093 Download or view PDF file **Universal Vented Rear Doors** Substitute a vented rear door for a solid rear door in selected sizes. Black textured powder coat fir price list for racks available less rear door (LRD). Fully vented rear doors have 64% openced by equipment connections. **Top & Bottom Fully Vented Rear Fully Vented Vented Rear Door*** Door* **Split Rear Door*** MW-VRD-44 MW-CLVRD-44 MW-LVRD-44 MW-LVRD-40

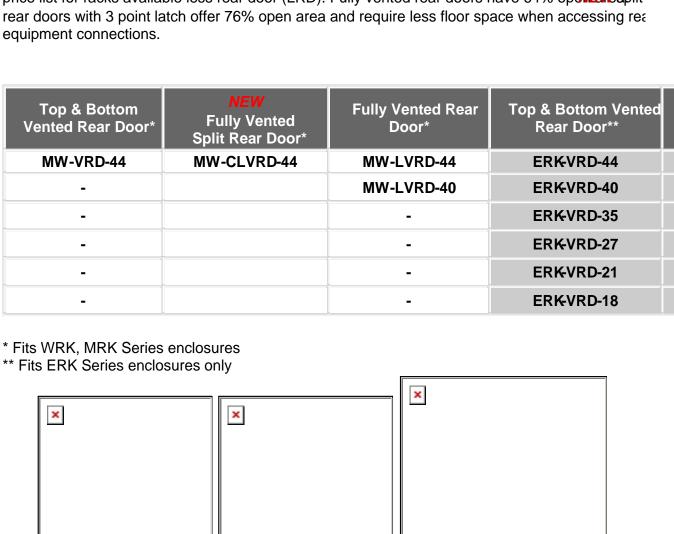

? Field configurable to easily accommodate changing requirements ? Fan, vent and filter kits available to solve both active and passive thermal management challenges ? For WRK, MRK, and ERK series enclosures

Part #

×

KO-AWFP2

MW - VRD - 44

Selectively Vented Rear Door

vent panel kit KO-VT3 **KO-FILTER3** filter kit KO-WSB3 blank panel kit

For more information, please download durermal Management Guide

Description

fan kit, includes two fans

×

MW-LVRD-44

The rear doors on our enclosures are now configurable for enhanced thermal management

? Configurable rear doors provide additional thermal management

Rack Base Temp				
	om templates for pinstallation eyed to interlock, use two a			
Part #	Description			
WRK-TEMP-27	bottom template for	WRłXX-27		
WRK-TEMP-32	bottom template for	WRłXX-32		

MRK-TEMP-26 MRK-TEMP-31 MRK-TEMP-36

NEW! Rail Bracket Adaptors

Adaptors allow for mounting of rack panels or electronics vertically between rackrail brackets. E adaptor mounts a single panel. **Description Fits** Part # **RBA-W44-1** 1 Space 44 space WRK

bottom template for MRKXX-26

bottom template for MRKXX-31

bottom template for MRKXX-36

RBA-W44-2	2 Space	44 space WRK
RBA-W44-3	3 Space	44 space WRK
RBA-MV44-1	1 Space	44 space MRK/VRK/DRK
RBA-MV44-2	2 Space	44 space MRK/VRK/DRK
RBA-MV44-3	3 Space	44 space MRK/VRK/DRK

×		
×		

NEW! Door /	NEW! Door / Status Sensor						
•		ducts front and rear doors and provides contact closure ents. Requires connection to system that senses contact c					
Part #	Quantity						
DCS	1						