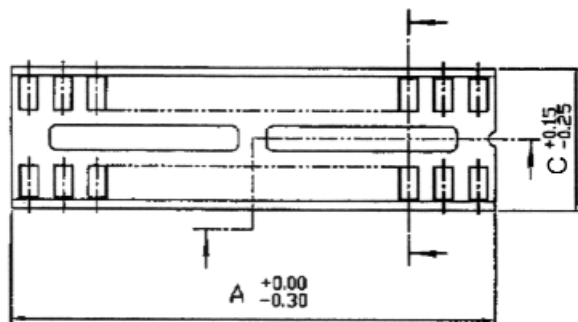


RECOMMENDED P.C.B LAYOUT
TOLERANCES: $\pm 0.05\text{mm}$

Mode Part #	Contacts	A	B	C	D
39-008-0	8	10.16	7.62	9.94	7.62
39-014-0	14	17.78	15.24		
39-016-0	16	20.32	17.78		
39-018-0	18	22.86	20.32		
39-020-0	20	25.40	22.86		
39-028-0	28	35.56	33.02	18.20	15.24
39-040-0	40	50.80	48.26		

SPECIFICATION:

Materials

Insulator:	PBT (UL94V-0)
Contacts:	Phosphor bronze
Plating:	Tin/Lead 90/10 60 μ " Min.
Insulator Color:	Black

Electrical

Current Rating:	1 Amps Max.
Contact Resistance:	15 m Ω Max.
Insulation Resistance:	5000 M Ω Min. @ 1000 VDC
Dielectric Voltage:	1000 VAC @ 1 Minute
Operating Temp.:	-55°C to 105°C

TITLE		SCALE
DUAL WIPE STANDARD I.C. SOCKET		NTS
DRAWING NO. 39-0XX-0		
		UNITS mm
FILE NAME 39-0XX.pdf		SHEET 1/1