
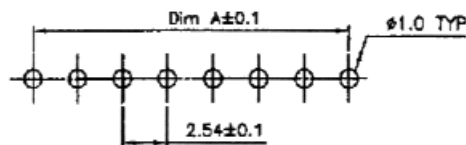



A: 2.54mm * (CONTACT NO. - 1)
B: 2.54mm * CONTACT NO.

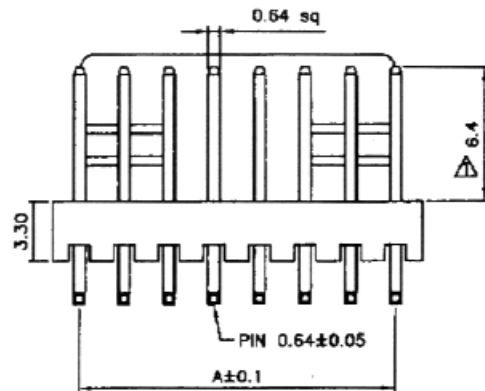

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

Positions	A	B	Mode Part #
2	2.54	5.08	37-6302-0
3	5.08	7.62	37-6303-0
4	7.62	10.16	37-6304-0
5	10.16	12.70	37-6305-0
6	12.70	15.24	37-6306-0
8	17.78	20.32	37-6308-0

NOTE:

Materials

Insulator:

PA66 (UL 94V-0)

Contacts:

Brass

Contact Plating:

Tin

Insulator Color:

White

Electrical

Operation Voltage:

250 VAC Max.

Current Rating:

3 Amps Max.

Contact Resistance:

15 mΩ Max.

Insulation Resistance:

1000 MΩ Min. @ 500 VDC

Dielectric Withstanding:

1500 VAC / Minute

Operating Temp.:

-55°C to 105°C

TITLE		SCALE
RIGHT ANGLE .100" PC HEADER		NTS
DRAWING NO. 37-63XX		
		UNITS mm
FILE NAME 37-63XX.pdf		SHEET 1/1