


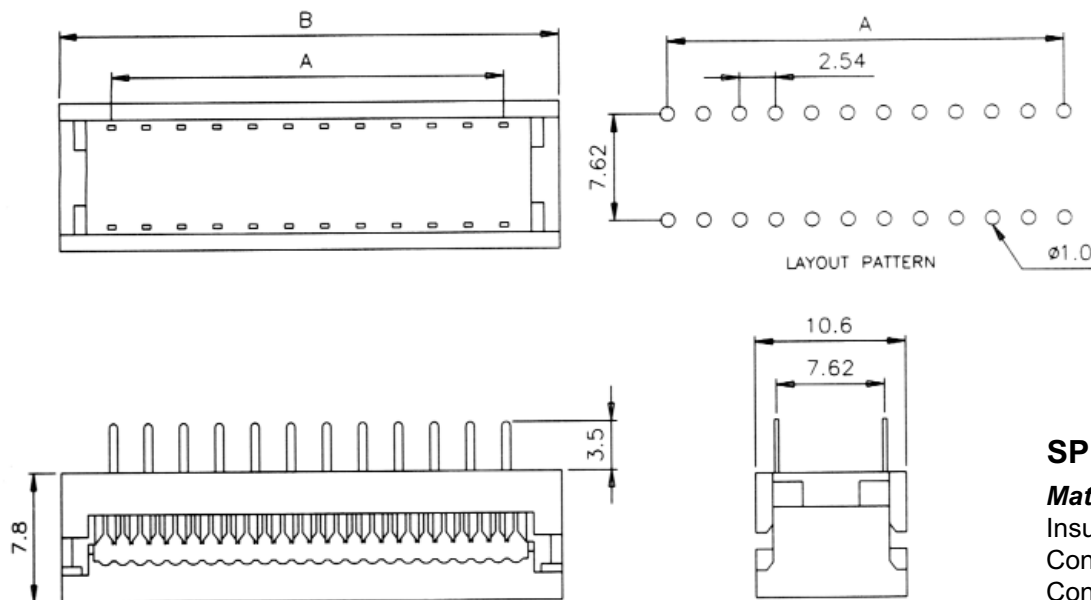

DIP SPACING=7.62mm

SPECIFICATION:

Materials

Insulator:	PBT 30% Glass Fiber, UL94V-0
Contacts:	Brass
Contact Plating:	Selective Gold
Insulator Color:	Black
Env. Prot. Material:	RoHS Compliant

Electrical

Current Rating:	1 Amps
Insulation Resistance:	1000 M Ω Min.
Dielectric Voltage:	1000 VAC
Operating Temp.:	-55°C to 105°C

Mode Part #	Contacts	A	B
39-214-0	14	15.24	23.06
39-216-0	16	17.78	25.60
39-220-0	20	22.86	30.68

TITLE		SCALE
DIP RIBBON CONNECTORS		NTS
DRAWING NO. 39-2XX-0		
		UNITS mm
FILE NAME 39-2XX.pdf		SHEET 1/1