



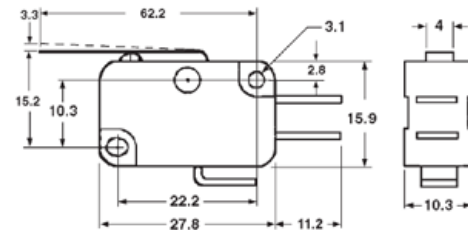
[Home](#) | [Find a Distributor](#) | [About Us](#) | [Contact](#) | [Products](#) | [New Products](#) | [Technical](#) | [Disty/Rep Login](#)

PART#/PRODUCT SEARCH**47-403-0****GO >>****Item Index**

[Mode Catalog](#)
[Lenline Part# Convert](#)
[AC Adapters](#)
[Audio Products](#)
[Battery Holders](#)
[Bottles and Dispensers](#)
[Brushes](#)
[Buzzers/Alarms](#)
[CATV Products](#)
[Circuit Breakers](#)
[Coaxial Connectors](#)
[Computer Accessories](#)
[Connectors](#)
[DC Power Products](#)
[Earphones/Microphones](#)
[Fans](#)
[Fuseholders/Fuses](#)
[Hardware](#)
[IC Sockets](#)
[Knobs](#)
[LED Products](#)
[Lamps/Pilot Lamps](#)
[Miscellaneous Items](#)
[Plastic Boxes](#)
[Potentiometers/L-Pads](#)
[Power Cords/Jacks/Bars](#)
[RF Adapters](#)
[Relays](#)
[Rubber Feet/Grommets](#)
[Speakers/Speaker Wire](#)
[Switches](#)
[Telephone Products](#)
[Test Equipment](#)
[Tool Cases](#)
[Tools](#)
[Transformers](#)
[Video Products](#)
[Wiring Products](#)
[Latent Fingerprint Brush](#)

RoHS
compliant **Enlarge****MICRO SWITCH****15A @ 125VAC or 250VAC**

Contact resistance: 15mΩ maximum (initial)
Insulation resistance: 100MΩ min (@ 500VDC)
Dielectric strength: 1,000VAC for 1 minute
Service life mechanical: 10,000,000 oper. min.
Service life electrical: 100,000 oper. min. (full load)
Operating temperature: -20°C to 75°C
Operating force: 230g max. (without lever)

**54.1mm actuator**

47-403-0 Bulk
47-403-1 Display Pkg

[Home](#) | [About Us](#) | [Contact Us](#)
©2009 Mode Electronics Ltd.



