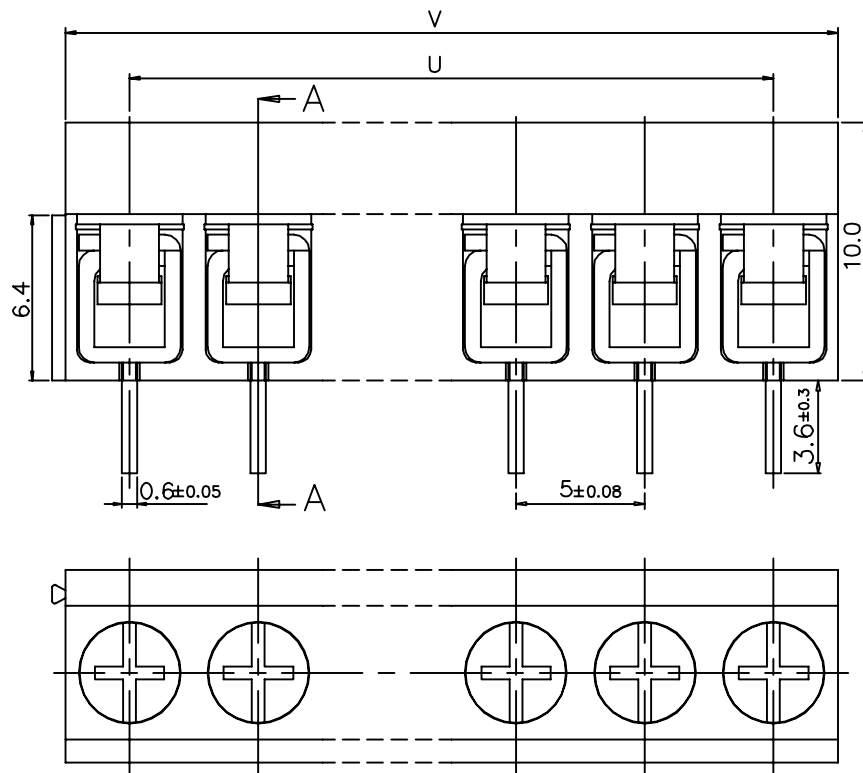


CSA Certificate Number: LR 86174-2
Revision: LR 86174-6

SECTION A-A

End Stackable (Dovetail)
58-102-0 (2 Positions)
58-103-0 (3 Positions)

P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
U	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00	85.00	90.00
V	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00
P	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	
U	95.00	100.00	105.00	110.00	115.00	120.00	125.00	130.00	135.00	140.00	145.00	150.00	155.00	160.00	165.00	170.00	175.00	
V	100.00	105.00	110.00	115.00	120.00	125.00	130.00	135.00	140.00	145.00	150.00	155.00	160.00	165.00	170.00	175.00	180.00	

Specifications:

Rating: 300V 8A(IEC250V 10A)
Insulation Withstand Voltage: AC 2000V Min
Insulation Resistance: 500 MΩ or more at DC500V
Using Temperature Range: -40°C to +105°C
Suitable Electric Wire: 26 to 14 AWG
Pitch: 5.00 mm
Env. Prot. Material: **RoHS** Compliant

4	Screw	P	Steel	Zinc Plated
3	Wire Protector	P	Stainless Steel	
2	Solder Post	P	Brass	Solder Plated
1	Housing	1	PA66	Green
Item	Name of Part	Quantity	Material	Notes

TITLE			SCALE	
TERMINAL BLOCKS			NTS	
DRAWING NO. 58-102/103				
			UNITS	mm
FILE NAME 58-102&103.pdf			SHEET	1/1