


AC OUTLET STRIP


Electrical Rating:
125VAC 15Amp

6 outlet power distribution strip with lighted power switch / breaker and surge suppression. Durable Plastic case with 6' cord. Outlets turned 90 degrees for AC adapters. Attractive Mode display box.

31-063-1 Display Box


6 OUTLETS POWER STRIP


- Heavy Duty Metal Construction
- Heavy Duty 6' Power Cord (14AWG x 3C)
- Illuminated On-Off Power Switch with built-in 15 amp Circuit Breaker
- Built-in Cord Organizer
- Surge Indicator LED
- 6 Surge Protected Outlets (2 Wide Spaced)

31-065-1 Display Box


8 OUTLETS POWER STRIP


- Heavy Duty Metal Construction
- Heavy Duty 6' Power Cord (14AWG x 3C)
- Illuminated On-Off Power Switch with built-in 15 amp Circuit Breaker
- Built-in Cord Organizer
- Surge Indicator LED
- 8 Surge Protected Outlets (3 Wide Spaced)

31-066-1 Display Box


HOME OR OFFICE SURGE ARRESTER WITH PHONE AND COAX PROTECTION


- Heavy Duty 6' Power Cord (14AWG x 3C)
- Telephone and Coax Line Protection
- Illuminated On-Off Power Switch/Circuit Breaker
- Surge Indicator LED
- 8 Surge Protected Outlets (3 Wide Spaced)

31-067-1 Display Box

DC POWER PRODUCTS
FEMALE AUTO POWER JACK


Female inline jack. Accepts 31-085, 31-088, 31-097, 31-089, 31-099, 31-085E.

31-080-0 Bulk
31-080-1 Pkg.

AUTO POWER PLUG c/w LED


Fuseable auto power plug with green LED indicator. Comes with 3A fuse.

31-085-0 10A/12VDC **31-085-1** Pkg.
31-085E-0 10A/12VDC Bulk

AUTO POWER PLUG, FUSEABLE


31-088-0 Bulk
31-088-1 Pkg.

Auto cigarette lighter plug with fuse holder.

STANDARD AUTO PLUG


31-089-0 Bulk
31-089-1 Pkg.

Standard auto cigarette lighter plug.


AUTO PLUG/CORD

2.1mm Plug 8' cord.
Has F1A (1Amp - 5x20mm) fuse.
Rating: 3 Amps @ 12VDC

31-099-0 Bulk
31-099-1 Pkg.

DC POWER PLUGS


9.5mm barrel length
4 mm cable diameter

31-101-0 1.3mm I.D.
31-121-0 2.1mm I.D.
31-141-0 2.5mm I.D.
Use -2 for Display Pkg.



14mm barrel length
4 mm cable diameter

2.1mm I.D.
31-122-0 Bulk
31-122-1 Pkg.



9.5mm barrel length
4.3mm cable diameter

31-123-0 2.1mm I.D.
31-143-0 2.5mm I.D.
31-161-0 3.0mm I.D.
Use -2 for Display Pkg.




14mm barrel length
4.3mm cable diameter

31-124-0 2.1mm I.D.
31-144-0 2.5mm I.D.
Use -2 for Display Pkg.

DC POWER JACKS


31-132-0 2.1mm
31-152-0 2.5mm
Use -1 for Display Pkg.

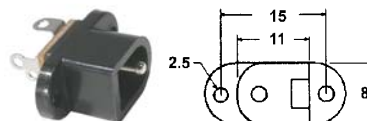

Max. 2A @ 16VDC

31-133-0 2.1mm
31-153-0 2.5mm
Use -2 for Display Pkg.



Max. 2A @ 16VDC


31-134-0 2.1mm
31-154-0 2.5mm
Use -2 for Display Pkg.

13mm chassis mtg. hole.



Compact isolated chassis mount DC power jack. 8mm mounting hole. Max. 2A @ 16VDC.

31-134M-0 2.1mm
31-154M-0 2.5mm
Use -2 for Display Pkg.



Max. 2.5A @ 16VDC

31-155-0 2.1mm
31-156-0 2.5mm
Use -2 for Display Pkg.

PBT Material 220 deg. C




Max. 2A @ 16VDC

31-157-0 2.1mm
31-158-0 2.5mm
Use -1 for Display Pkg.

TEST JACKS & PLUGS

CHASSIS BANANA JACKS



31-401-0 Black
31-400-2 Red and Black Pkg (2)
31-402-0 Red


CHASSIS BANANA JACKS



Multi-colored chassis mounting Banana jacks.


31-411-0 Black
31-414-0 Yellow
31-416-0 Blue
31-410-2 Red/Black
31-412-0 Red
31-415-0 Green
31-419-0 White
31-410-6 Asst. (6)

BINDING POSTS



31-421-0 Black
31-420-2 Pkg (red & blk)
31-422-0 Red
31-425-0 Green


LARGE BINDING POSTS



Gold plated. 15A @ 125V AC


31-441-0 Black
31-443-2 Pkg (red & blk)
31-442-0 Red

LOW PROFILE BINDING POSTS



31-431-0 Black
31-430-2 Pkg 1 red 1 black
31-432-0 Red


DUAL BINDING POSTS



Gold plated, 30A

31-440-0 Bulk
31-440-1 Pkg

BANANA PLUGS



31-461-0 Black
31-460-2 Pkg 1 red 1 black
31-462-0 Red

COMPUTER ACCESSORIES

RS232 GENDER CHANGERS



Low profile gender changers with appropriate mounting hardware.

Use -1 for Display Package (except 32-025-0)

Positions	male-male	male-female	fem-fem
9-pos.	32-021-0	32-022-0	32-023-0
15-pos.			32-026-0
25-pos.	32-027-0	32-028-0	32-029-0

32-021HD-0 15-pos., high density, male-male
32-023HD-0 15-pos., high density, fem.-fem.

MODULAR PHONE JACK TO RS232 ADAPTERS



Note: RJ45(8C) types will accept RJ12(6C) plugs.
RJ12 = 6P/6C
RJ45 = 8P/8C

32-321-0 RJ45(8C) - 9-position male
32-322-0 RJ45(8C) - 9-position female
32-323-0 RJ45(8C) - 15-position male
32-325-0 RJ45(8C) - 25-position male
32-326-0 RJ45(8C) - 25-position female

Use -1 for Display Package



A-A USB2.0 CABLE

32-406-0 6' long
32-410-0 10' long
32-406-1 Pkg
32-410-1 Pkg