

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0678005003

Status:


Active

Overview:

Serial ATA Connectors and Cable Assemblies

Description:

1.27mm Pitch Serial ATA High Speed Header, Vertical, Surface Mount, with Locking Latch, 7 Circuits, 0.38µm Gold (Au)Plating, for 1.60mm PCB, with PCB Locator Pegs, Lead-Free, Blue

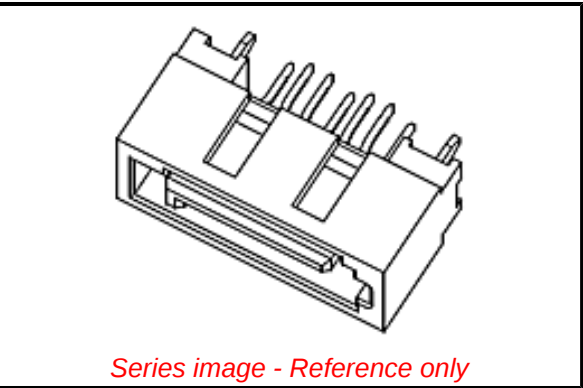

Documents:

3D Model

Packaging Specification PK-67800-001 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-67491-001-001 (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	67800
Application	Board-to-Board, Signal, Wire-to-Board
Comments	Staggered Solder Pin Metal Post Length 2.65mm
Overview	Serial ATA Connectors and Cable Assemblies
Product Name	Serial ATA
UPC	191128091862
Physical	
Breakaway	No
Circuits (Loaded)	7
Circuits (maximum)	7
Color - Resin	Blue
Durability (mating cycles max)	50
First Mate / Last Break	Yes
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.853/g
Number of Rows	1
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-35°C to +85°C
Termination Interface: Style	Surface Mount

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

ED/30/2017 (7 July

2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

67800 Series

Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	15V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	255

Material Info

Reference - Drawing Numbers

Electrical Model Document	EE-67800-002
Packaging Specification	PK-67800-001
Product Specification	PS-67491-001-001
Sales Drawing	SD-67800-005

This document was generated on 08/22/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION