

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0760601022

Status:


Active

Overview:

Impact™ Backplane Connectors and Cable Assemblies

Description:

Impact™ 100 Ohm 5 Pair Right Angle Daughtercard Receptacle, Unguided, 12 Columns, 180 Circuits, Plated Through Hole Dimension 0.39mm, Lead-Free

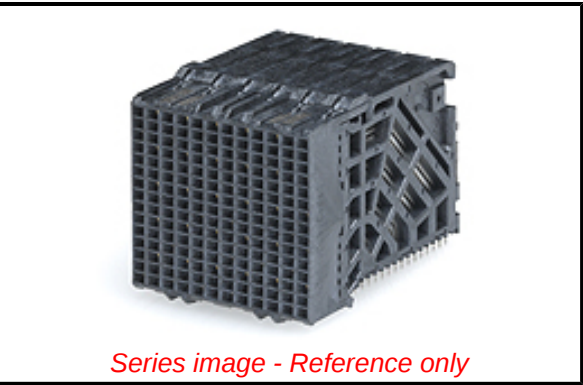

- Documents:
- 3D Model

Application Specification AS-76060-9999-001 (PDF)
- Drawing (PDF)

Packaging Specification PK-70873-611 (PDF)
- Product Specification PS-76060-999-001 (PDF)

RoHS Certificate of Compliance (PDF)
- Application Specification AS-76060-990-001 (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76060
Application	Conventional, Daughtercard
Application Tooling Documents	TM-622018799
Component Type	PCB Receptacle
Electrical Model	Yes
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
UPC	883906866983
Physical	
Circuits (Loaded)	180
Circuits (maximum)	180
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	20.450/g
Number of Columns	12
Number of Pairs	5
Number of Rows	15
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per - ED/30/2017 (7 July 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

76060 Series

Mates With

76055 Impact™ 100 Ohm Vertical Backplane Header

Use With

76153 Pirate Cannon Wide Guide Module

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990-001, AS-76060-9999-001
Electrical Model Document	EE-76060-003
Packaging Specification	PK-70873-611
Product Specification	PS-76060-999-001
S-Parameter Model	SP-76060-003
Sales Drawing	SD-76060-001
Symbol/Footprint Data	SYM-76060-1022

This document was generated on 08/24/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION