

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0780120011](#)
Status: **Active**
Overview: [Serial Attached SCSI \(SAS\) Connectors](#)
Description: 1.27mm Pitch, Serial Attached SCSI Combo Device Plug, Vertical, Surface Mount, 29 Circuits, Plastic Locating Pegs, Pick-and-Place Cap, Embossed Tape on Reel, Lead-Free

Documents:
[3D Model](#) [Product Specification PS-78012-002-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [78012](#)
Application Board-to-Board
Comments With Cap
Component Type Plug
Electrical Model Yes
Overview [Serial Attached SCSI \(SAS\) Connectors](#)
Product Name SAS 6G
Type N/A
UPC 822350343053

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 14, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Plug
Lock to Mating Part None
Material - Metal Brass
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 1.750/g
Number of Rows 2
Orientation Vertical
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 1.57mm
Packaging Type Embossed Tape on Reel
Panel Mount Yes
Pitch - Mating Interface 0.80mm, 1.27mm
Pitch - Termination Interface 0.80mm, 1.27mm
Plating min - Mating 0.762µm
Plating min - Termination 1.905µm
Polarized to Mating Part Yes
Polarized to PCB Yes
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -40°C to +85°C

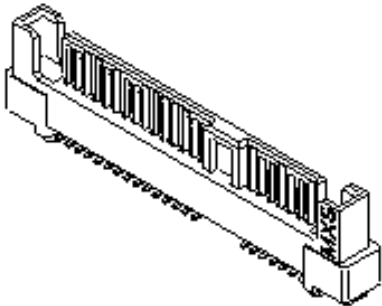

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS Green Image
ELV Not Relevant
RoHS Phthalates Not Contained

Search Parts in this Series

[78012](#) Series

Mates With

[78011](#) SATA Receptacle, SFF 8482
Unshielded Dual Port Serial Attachment
Connector

Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Electrical Model Document	EE-78012-002, EE-87863-006, EE-87863-007
Product Specification	PS-78012-002-001
S-Parameter Model	SP-78012-002
Sales Drawing	SD-78012-101

This document was generated on 08/03/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION