


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0461141036](#)
Status: **Active**
Overview: [EXTreme LPHPower™ Connectors](#)
Description: 1.27mm, 12.00mm Pitch, EXTreme LPHPower™ Receptacle Header, Vertical, 10 Power Contacts, 36 Signal Contacts, Select Gold (Au) Plating, with BMI Guides

Documents:
[3D Model](#) [Application Specification AS-46114-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [Packaging Specification PK-46114-003 \(PDF\)](#)
[Product Specification PS-46114-001-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19880
UL	E29179
General	
Product Family	PCB Receptacles
Series	46114
Application	Board-to-Board, Power
Application Tooling Part Link	62100-6300
Application Tooling Part Link	62201-8672
Comments	Press Fit Pin
Overview	EXTreme LPHPower™ Connectors
Product Name	EXTreme LPHPower™
UPC	800756886336

Physical	
(p)ower-(s)ignal Configuration	10p - 36s
Circuits (Loaded)	46
Circuits (maximum)	46
Color - Resin	Black
Durability (mating cycles max)	250
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	14.144/g
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tray
Pitch - Mating Interface	1.27mm, 12.00mm
Pitch - Termination Interface	1.27mm, 2.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

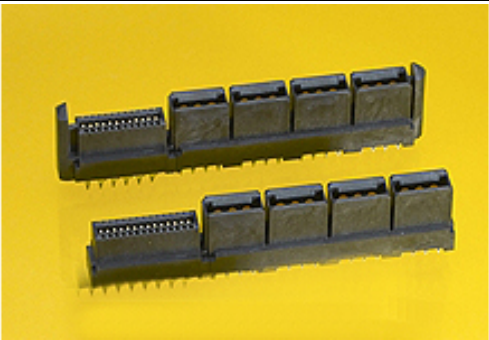

Series image - Reference only

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - ED/30/2017 (7 July 2017) Halogen-Free Status Low-Halogen Need more information on product environmental compliance? Email productcompliance@molex.com Please visit the Contact Us section for any non-product compliance questions.	China RoHS China ROHS ELV RoHS Phthalates
	Green Image Not Relevant Not Contained

Search Parts in this Series
[46114](#) Series

Mates With
[45985](#) EXTreme LPHPower™ Header

Electrical

Current - Maximum per Contact	30.0A
Grounding to PCB	No
Voltage - Maximum	250V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-46114-001-001
Packaging Specification	PK-46114-003
Product Specification	PS-46114-001-001
Sales Drawing	SD-46114-100

This document was generated on 08/22/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION