


SCALE 2:1



SCALE 2:1

NOTES: VALID UNLESS OTHERWISE SPECIFIED

1. GENERAL:




- PACKAGING SPECIFICATION PER MOLEX DRAWING: PK-31301-898
- PARTS MUST BE IN COMPLIANCE TO THE CURRENT VERSION OF THE MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION
- DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
- TETHER MOUNTING BOSS DESIGNED TO BE USED WITH THE FOLLOWING:
#4-20 x0.375" TRI-LOBULAR THREAD FORMING SCREW
ASSEMBLY TORQUE: 0.77Nm +/- 0.08Nm
- ASSEMBLY PRODUCT WEIGHT: 9.28g

2. DESIGN - MATERIALS:


- SEE BOM TABLE

3. DESIGN - GEOMETRY:

- ALL GRAPHIC DATA IS BASIC (NO TOLERANCE) AND MUST BE TAKEN FROM THE DATA FILE AT ITS LATEST REVISION.
- GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5M-2009
- EDGES AND UNDIMENSIONED DETAILS PER ISO13715
- CORNERS SHOWN AS SHARP TO BE R 0.2 MAX.

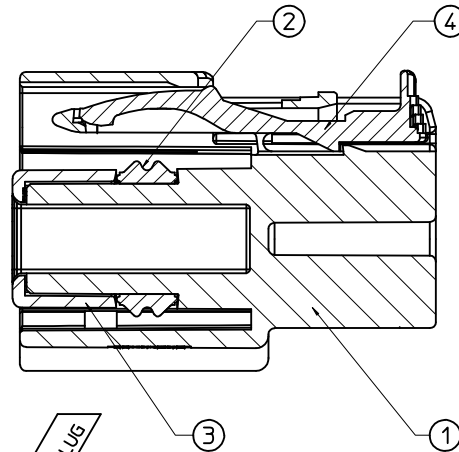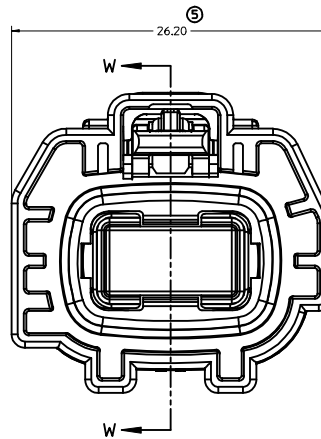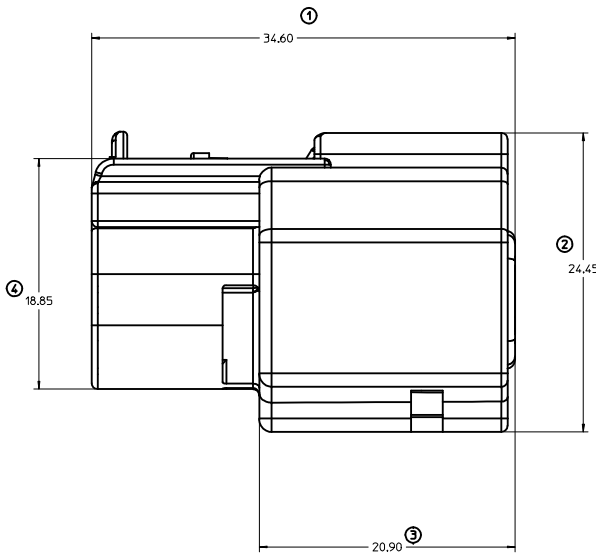

SECTION W-W

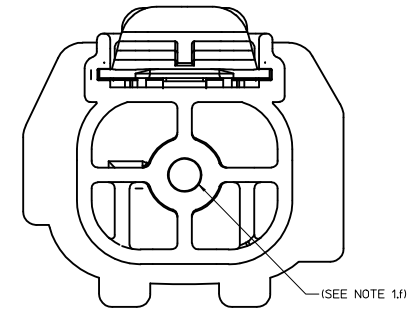

12 CKT HS AUTOLINK II UNIVERSAL SEAL PLUG BOM TABLE (FOR REFERENCE ONLY)

ITEM NO	MATERIAL NUMBER	DESCRIPTION	COLOR	MATERIAL	QTY.
1	34855-5906	12 CKT HS AUTOLINK II UNIVERSAL SEAL PLUG	BLACK	SPS/PA66 20GF	1
2	34855-7106	12 CKT HS AUTOLINK II - RING SEAL	RED	SILICONE	1
3	34855-8006	12 CKT HS AUTOLINK II - PLUG SEAL RETAINER	NATURAL	PBT 30GF	1
4	33611-0001	CPA	RED	PBT 20GF	1

34855-0906
12 CKT HS II UNIVERSAL SEAL PLUG

ENTER DESCRIPTION IEC NO: UAU2015-1016 DRAWN BY: CHYK CHECKED BY: APPR: KWAUB DATE: 2015/01/07	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	4 PLACES ± --- ± ---	MM ONLY	5:1	METRIC	☉
	▽=0	3 PLACES ± --- ± ---				
	▽=0	2 PLACES ± 0.25 ± ---				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	1 PLACE ± --- ± ---	APPROVED BY: SMARCEAU	MATERIAL NO.	34855-0906	DOCUMENT NO.	SD-34855-096
	0 PLACE ± --- ± ---	DATE: 2012/06/01				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						SHEET NO. 1 OF 1