

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0190130026

Status:

Active

Overview:

Standard Quick-Disconnect Terminals

Description:

InsulKrimp™ Fully Insulated Piggyback Quick Disconnect, Tab 6.35 x 0.81mm, 18-22 AWG, Expanded Red Insulator, Mylar Tape

Documents:

3D Model


Product Specification PS-19902-011-001 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-19902-008-001 (PDF)

Agency Certification	
CSA	LR18689
UL	E79133
General	
Product Family	Quick Disconnects
Series	19013
Crimp Quality Equipment	Yes
Insulated	Fully
Overview	Standard Quick-Disconnect Terminals
Product Name	InsulKrimp™
Type	Quick Disconnect
UPC	822350961455
Physical	
Barrel Type	Closed - Brazed
Color - Resin	Red
Flammability	94V-2
Gender	Female
Glow-Wire Compliant	No
Insulation	Nylon (PA)
Lock to Mating Part	No
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	1.231/g
Orientation	Straight
Packaging Type	Adhesive Tape on Reel
Polarized to Mating Part	Yes
Tab Thickness	0.81mm
Tab Width	6.35mm
Temperature Range - Operating	105°C
Wire Insulation Diameter	3.50mm max.
Wire Size AWG	18, 20, 22
Electrical	
Voltage - Maximum	600V AC
Material Info	
Engineering Number	AA-2317T
Reference - Drawing Numbers	
Product Specification	PS-19902-008-001, PS-19902-011-001
Sales Drawing	SD-19013-001

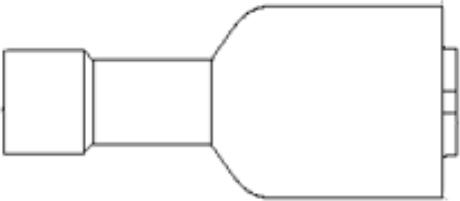

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

ED/30/2017 (7 July

2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

19013 Series

This document was generated on 08/04/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION