

MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

HOUSING POLYESTER BUTYLENE TEREPHTHALATE(WHITE)

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR TEFLON



MOUNTING POST BRASS
PLATED TIN

SOLDER TAIL BRASS WIRE
PLATED TIN


WASHER PHOSPHOR BRONZE
PLATED NICKEL

NUT BRASS
PLATED NICKEL

MECHANICAL & ELECTRICAL CHARACTERISTICS:
PER PRODUCT SPECIFICATION PS-73598-0060

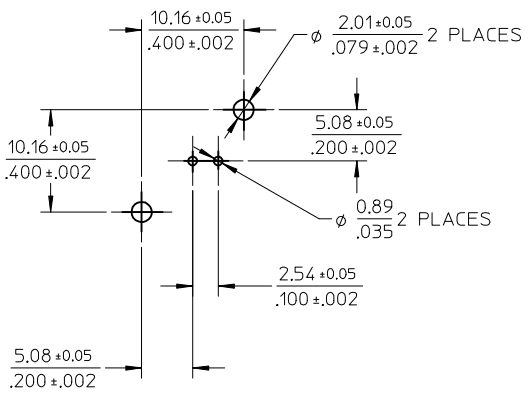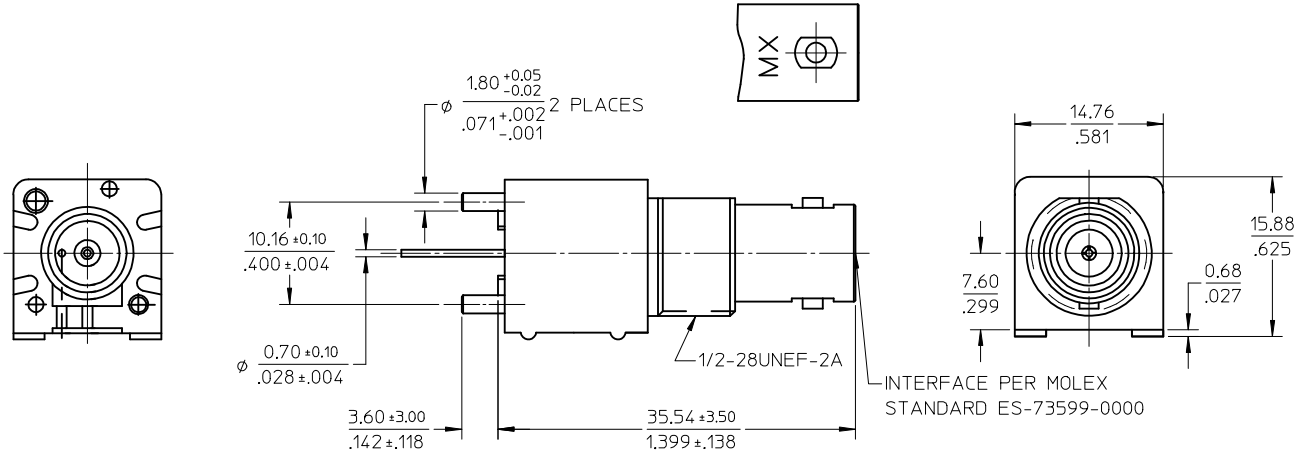

PCB HOLE CONFIGURATION

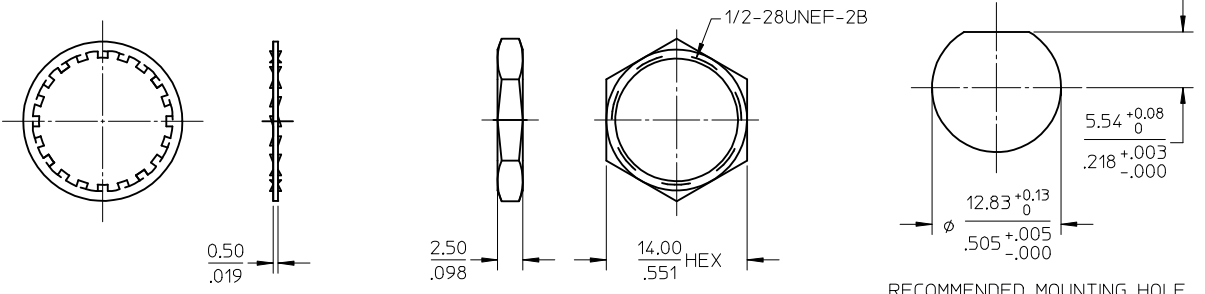

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS:5.50MM
RECOMMENDED MOUNTING TORQUE
12 inch-pounds MAX.

ENTER DESCRIPTION EC NO: URF2005-0553 DRW:CLL1 CHKD: APPR:MHUANG 2005/06/28 2005/06/29 2005/06/29	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ± 2 °	DIMENSION STYLE MM/IN DRAWN BY: CLL1 CHECKED BY: PENNY APPROVED BY: MISEN DATE: 2005/06/06 DATE: 2005/06/06 DATE: 2005/06/06	SCALE: --- DESIGN UNITS: METRIC THIRD ANGLE PROJECTION	TITLE: BNC 75 OHM VERTICAL PCB RECEPTACLE BNC-J/PCB MOLEX INCORPORATED DOCUMENT NO. SD-73101-068 SHEET NO. 1 OF 1
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 73101-0680	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SIZE: A3				
	REV: A				