
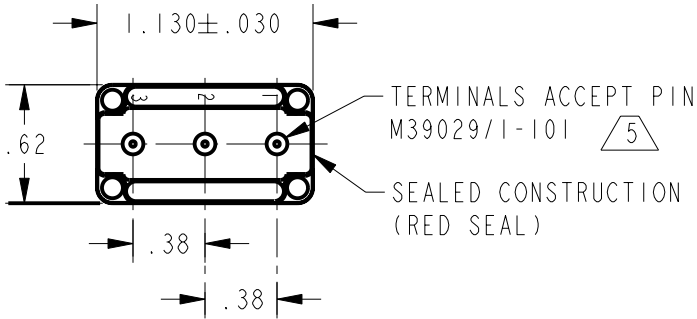


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
101TL2887 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

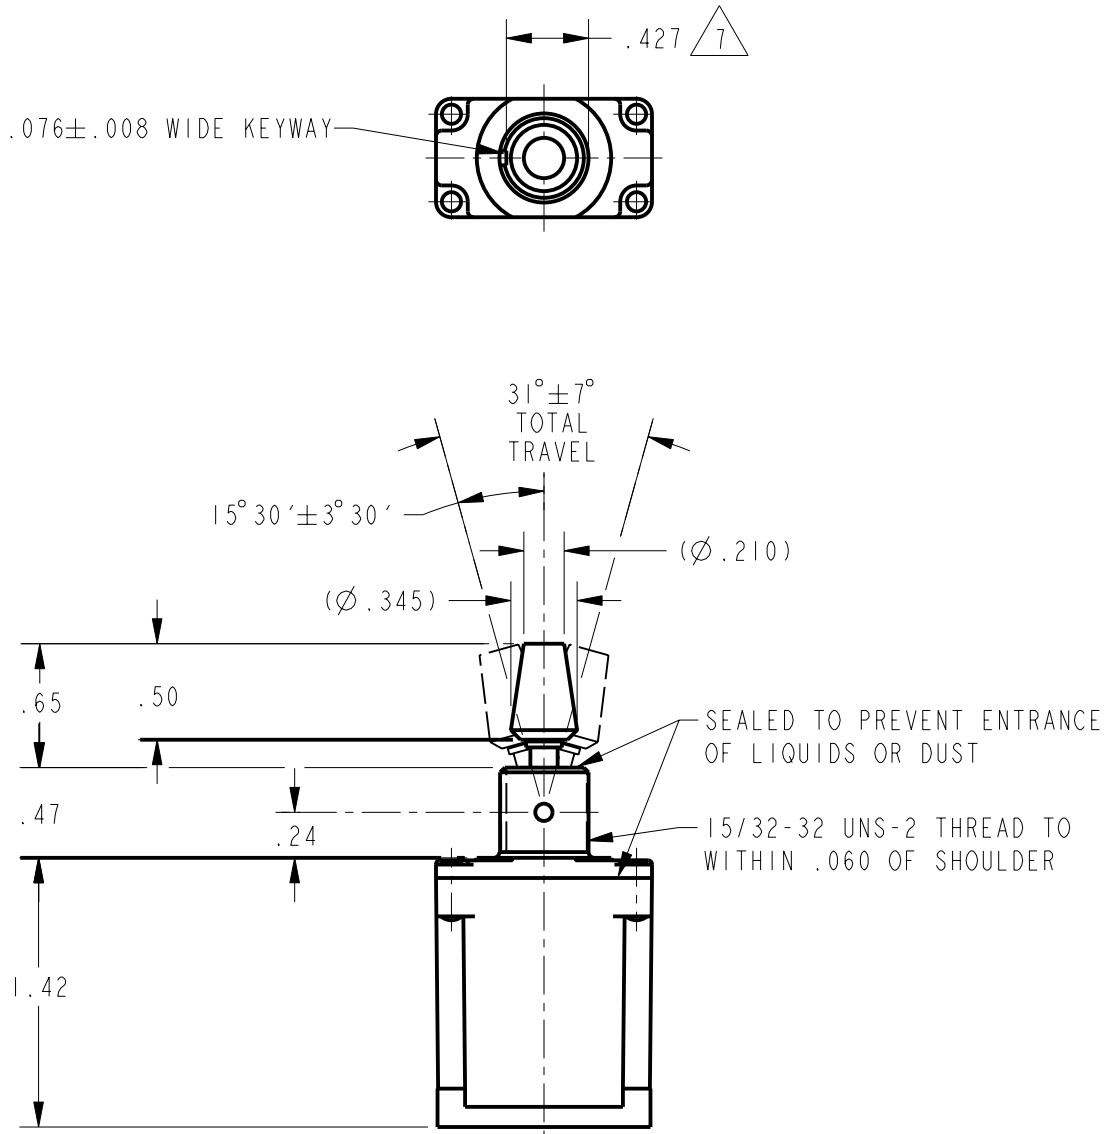

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 4			CURRENT CAPACITY (AMPS)
	EXTREME POSITION KEYWAY SIDE (1-2)	CENTER (1-2)	EXTREME POSITION OPPOSITE KEYWAY (2-3)	
101TL2887-1	ON	OFF	ON	0.1A 28 VDC, 115 VAC
101TL2887-21	NONE	OFF	ON	0.1A 28 VDC, 115 VAC
101TL2887-31	NONE	ON	ON	
101TL2887-4	MOM OFF	NONE	ON	
101TL2887-5	MOM ON	OFF	ON	
101TL2887-6	MOM ON	NONE	OFF	
101TL2887-8	MOM ON	NONE	ON	
101TL2887-51	NONE	ON	MOM ON	
101TL2887-61	MOM ON	OFF	NONE	

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F. CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION, MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
 - 3 FURNISHED UNASSEMBLED
 - 4 APPLIES ONLY TO "ON" AND "MOM ON" POSITIONS
 - 5 THE SEALING GROMMET SHALL SEAL ON A SMOOTH WIRE INSULATION OF Ø.040 TO Ø.083 (16-20 GAGE)
 - 6 - UNUSED TERMINAL HOLES MAY BE SEALED WITH PLUGS M83723/28-20
 - 7 FROM BOTTOM OF KEYWAY TO MAJOR Ø OF 15/32 THREAD
 - 8 - GOLD PLATED CONTACTS

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.08 LB MAX