
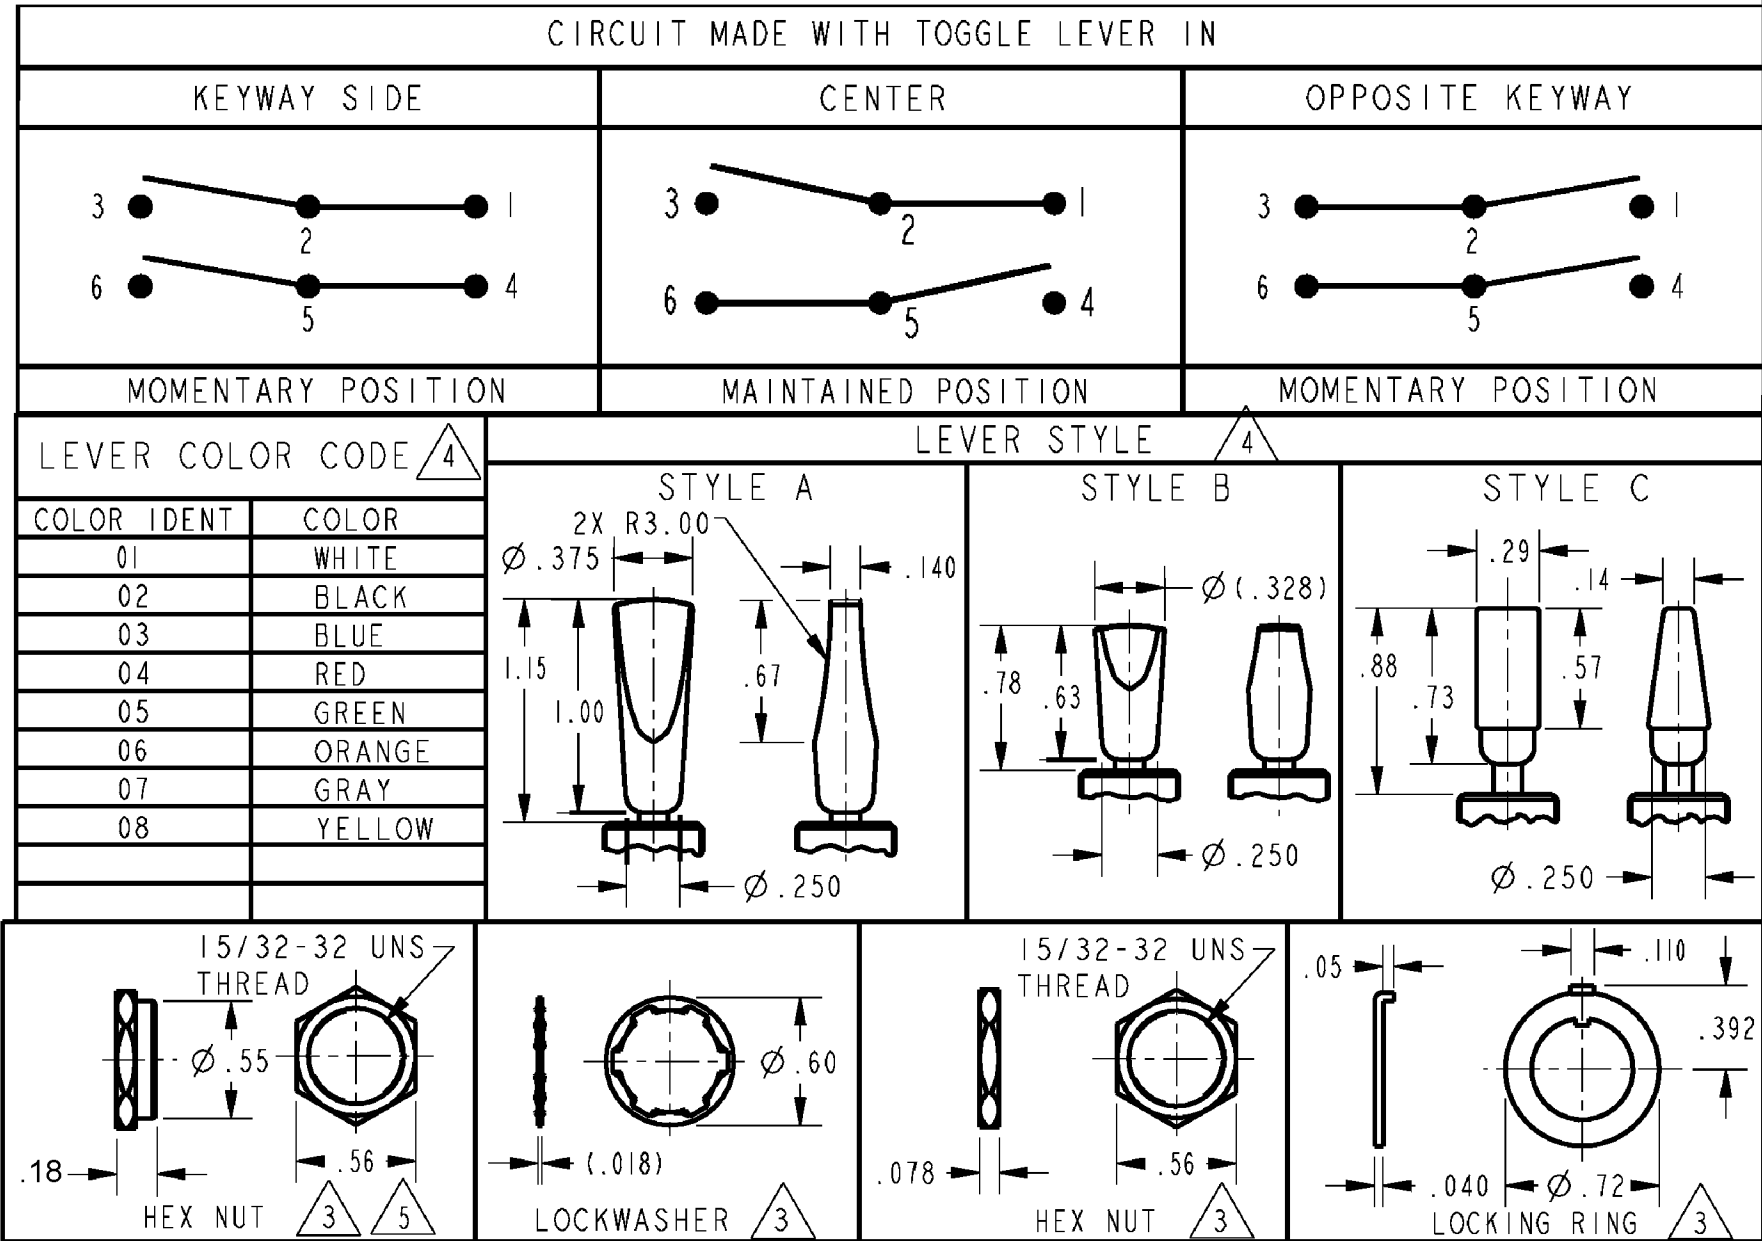


HONEYWELL PART NUMBER
-

REV	DOCUMENT	CHANGED BY	CHECK
B	0100323	RKA 09MAY13	CMH

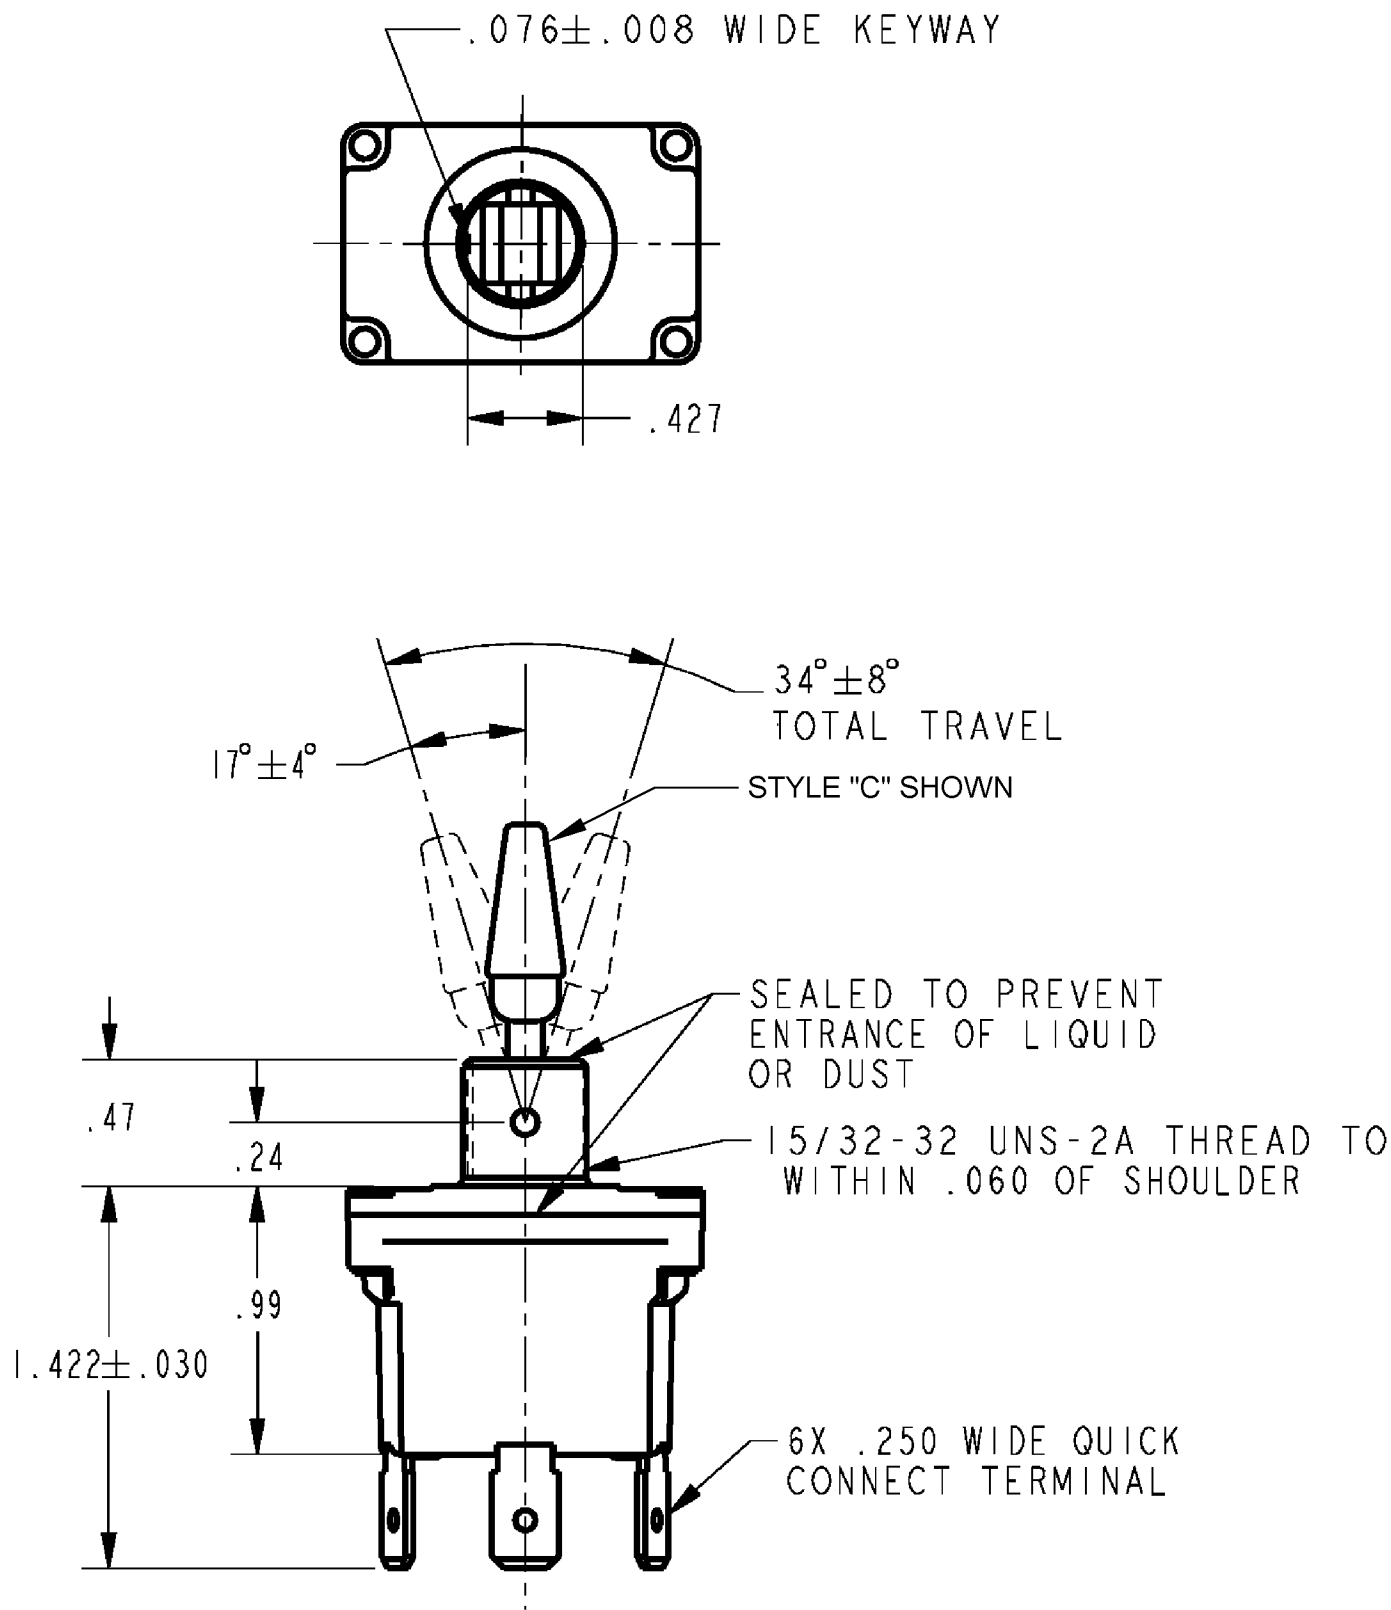

ELECTRICAL DATA	
L192	10A 125, 250, 277 VAC
	1/4HP 125 VAC
	1/2HP 250, 277 VAC
	3A 125 VAC "L"
UL CE	

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - SUFFIX MUST BE ADDED FOR DESIRED LEVER STYLE AND COLOR (EXAMPLE: 32NT391-70-C08)
 - 5 - BLACK FINISH

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES 2 THIRD ANGLE PROJECTION	DRAWN	KRB	10 OCT 07	Honeywell	
	CHECK	MJS	10 OCT 07		
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE	
	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SWITCH, TOGGLE	
RASTER		SIZE	C	TYPE	I
		SCALE	NTS	DRAWING NAME	32NT391 - 70 SERIES CHART 1
		SHEET 1 OF 1			REV B