

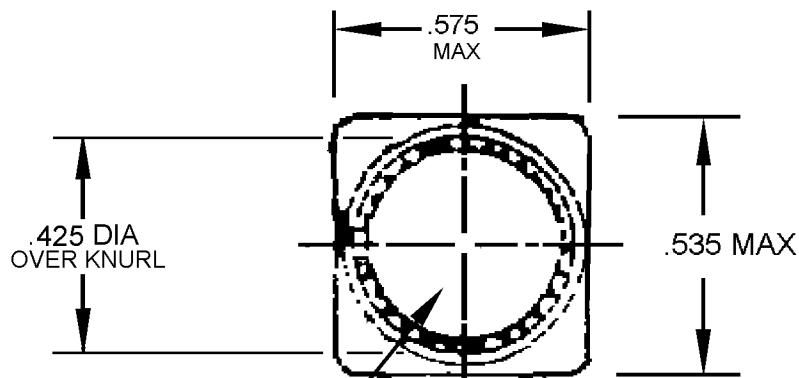


REV	DOCUMENT	CHANGED BY	CHECK
A	0035962	KRB 03 DEC 07	MJS

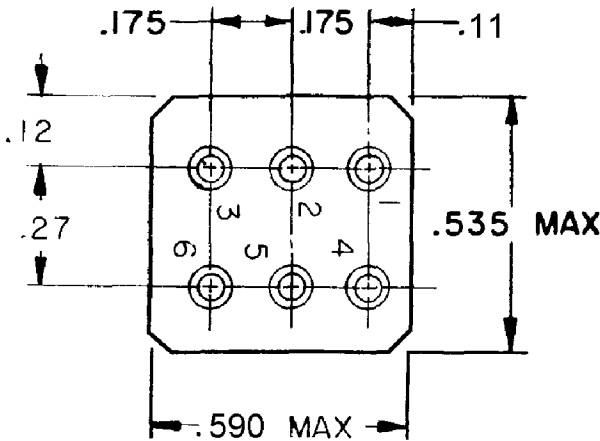

VIEW SHOWN WITH LEVER
IN CENTER POSITION

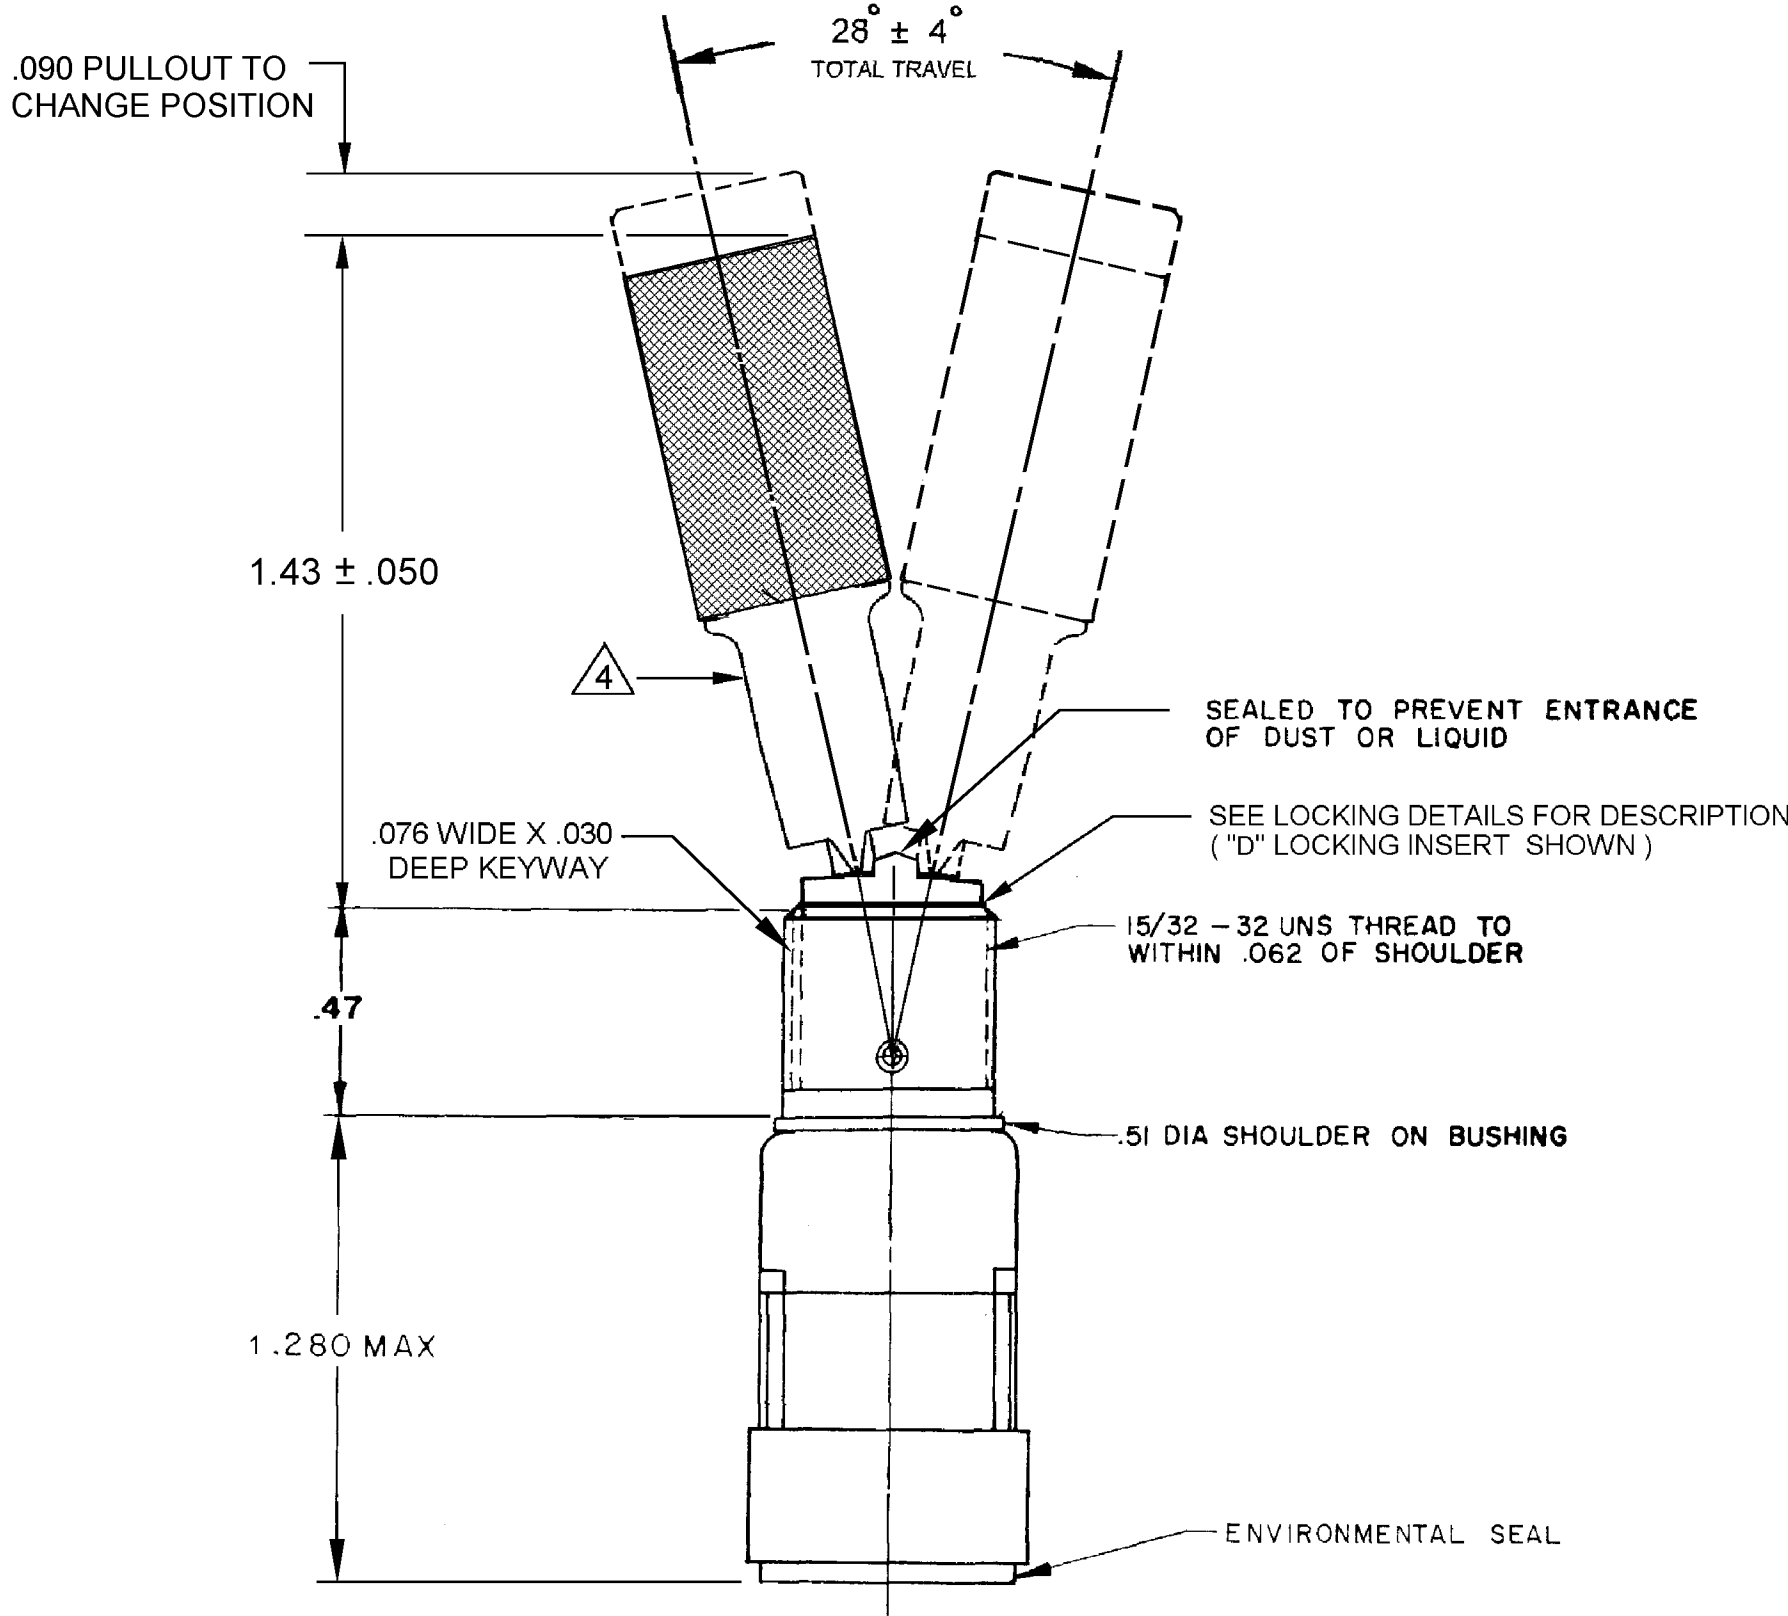

CATALOG LISTING	RECOMMENDED LOCKING COMBINATIONS FOR CONFIGURATIONS SEE LETTERED DETAILS	CIRCUIT WITH TOGGLE IN			ELECTRICAL DATA
		ONE EXTREME POSITION (KEYWAY)	CENTER POSITION	OTHER EXTREME POSITION (OPPOSITE KEYWAY)	
112TW39-3DX18	D	ON	NONE	ON	28 VDC & 115 VAC 5 AMPS RES. 2 AMP IND. 1 AMP LAMP

"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION	"F" LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	
"G" LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)	
"M" LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)			

- NOTES:
- 1 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101
 - 2 - SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING & X18 TO INDICATE LEVER TYPE
 - 3 - FURNISHED UNASSEMBLED
 - 4 - MATTE FINISH
 - 5 - KNURLED BUTTON

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES ± 2 THIRD ANGLE PROJECTION 	DRAWN	KRB	03 DEC 07	Honeywell			
	CHECK	MJS	03 DEC 07				
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, TOGGLE			
	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
				C	I	112TW39 - X18 SERIES CHART 2	A
RASTER			SCALE	NTS		SHEET 1 OF 1	