


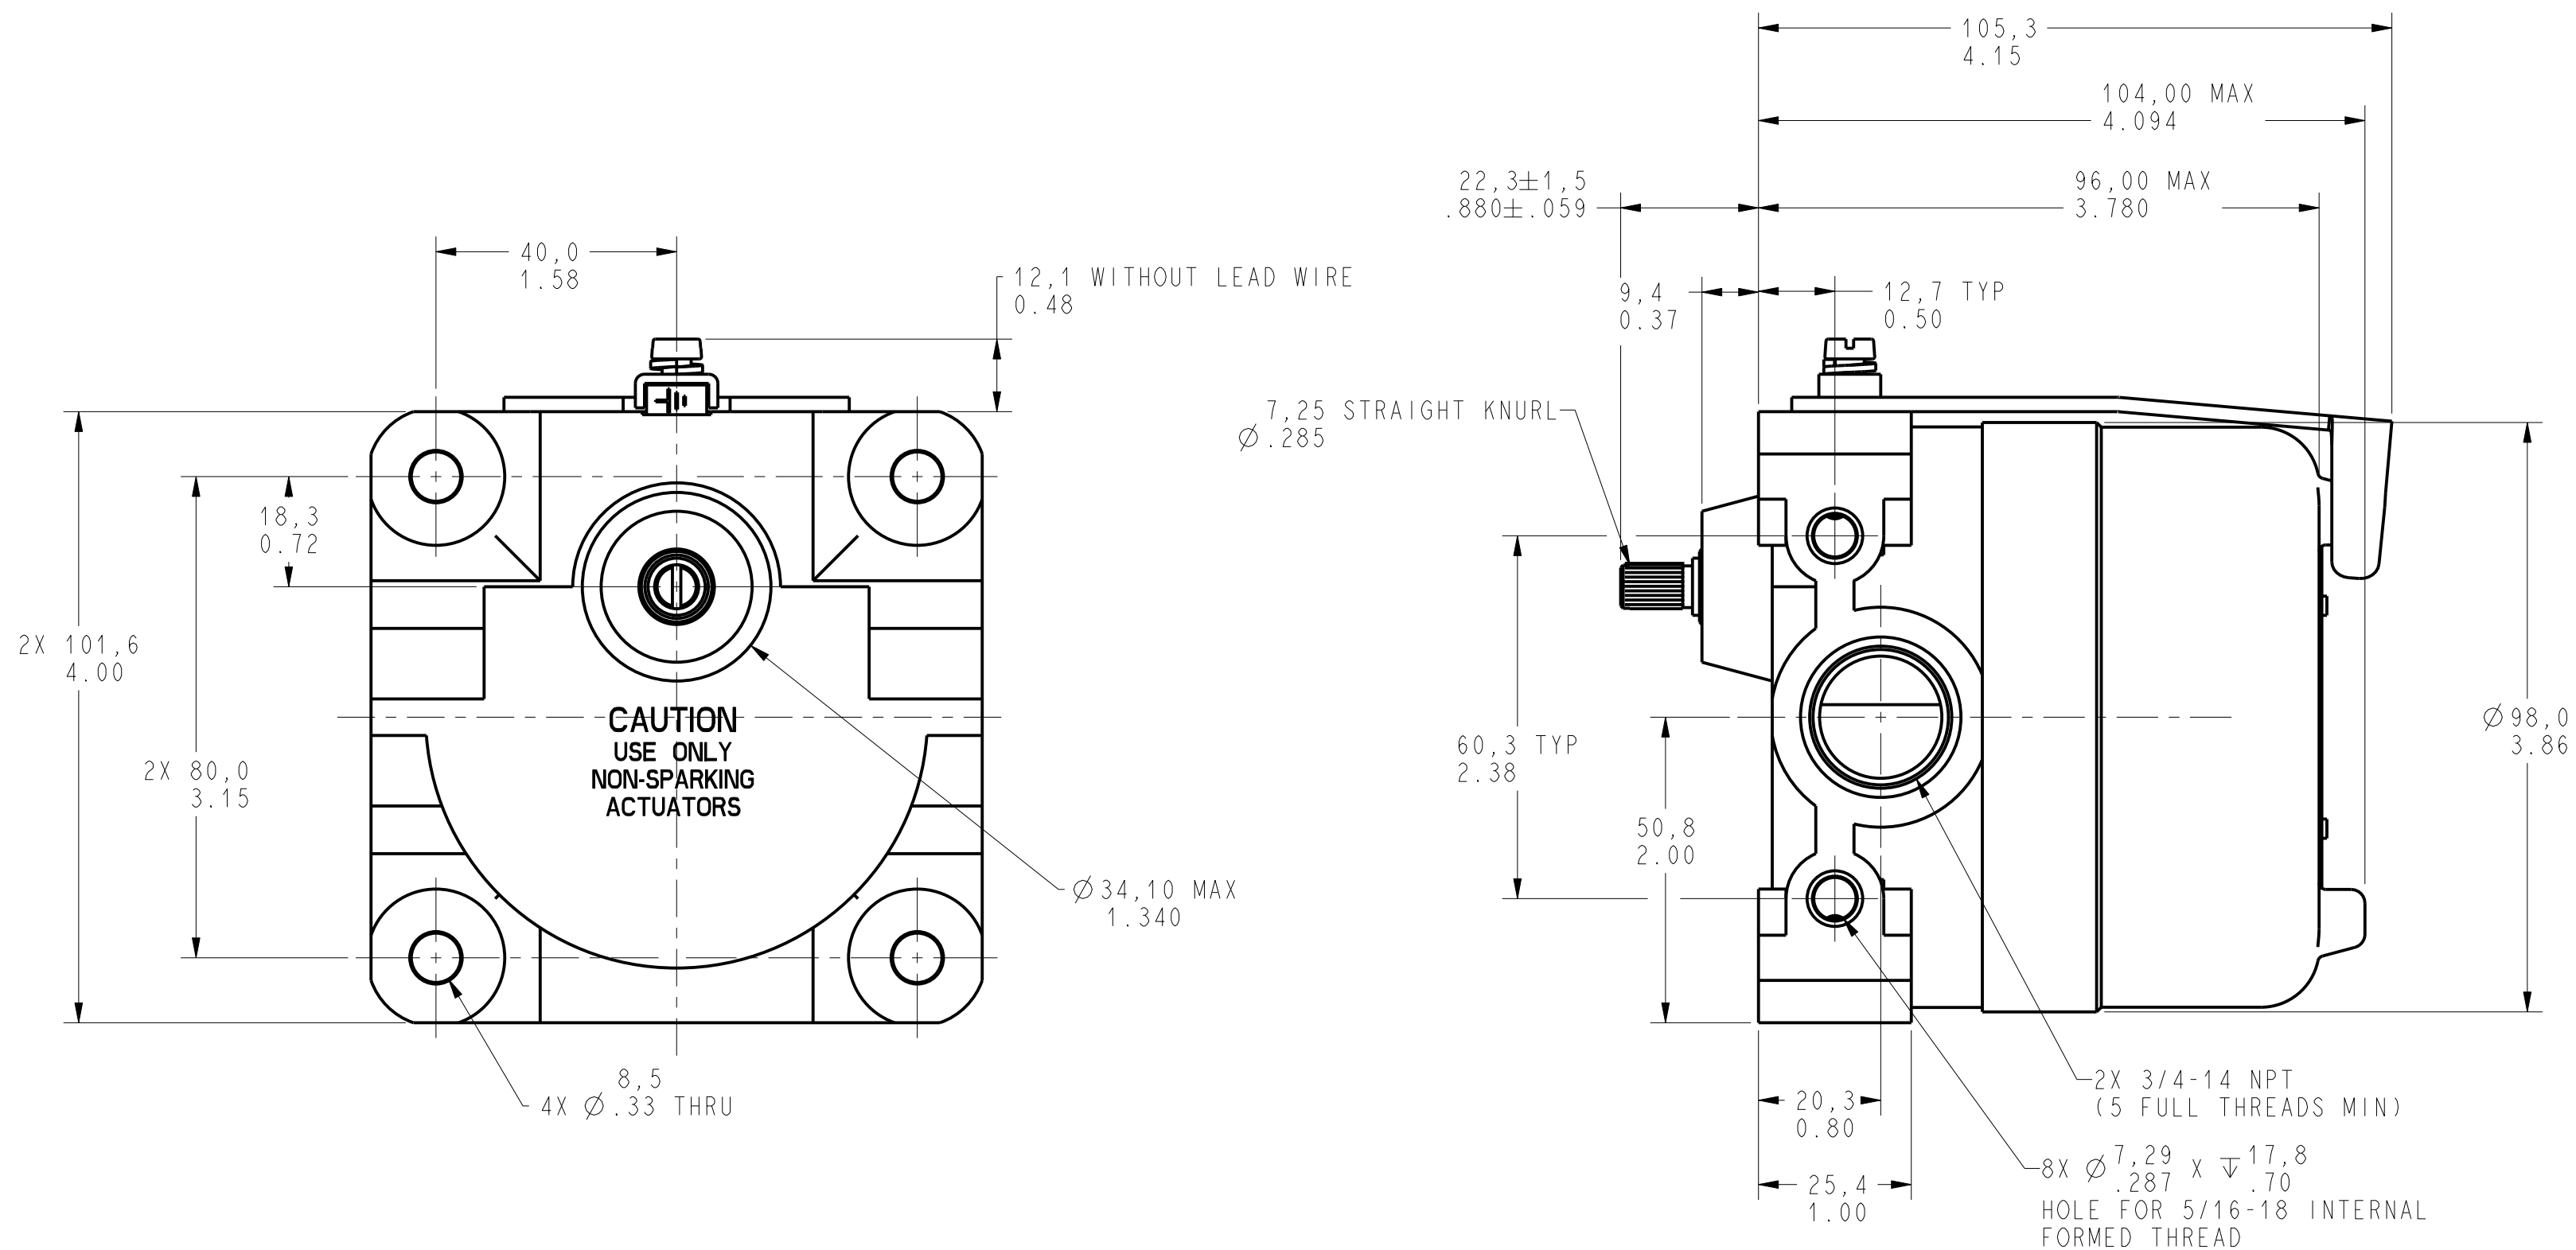

NOTES

- 1 - EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS 1, GROUPS C AND D; CLASS 2 GROUPS E, F AND G
- 2 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
- 3 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
- 4 - 6-32 UNC X (7.92) (.312) PAN HEAD TERMINAL SCREW AND LOCKWASHER (SEMS TERMI-LOX) (3 PER BASIC)
- 5 - CAMS MAY BE REPOSITIONED IN 7°20' INCREMENTS
- 6 -2 BASICS; EACH BASIC SWITCH ACTUATES AT APPROX, SAME TIME PERIOD IN CW DIRECTION AND REMAINS ACTUATED FOR APPROX.30°. AFTER THE 30° IS TRAVERSED SWITCH REMAINS UNACTUATED FOR DURATION OF 360°
- 7 - FOR USE IN TEMPERATURES UP TO 85°C
- 8 - SEE 7CX CHARTS 1 AND 2 (I DRAWING) FOR LEVER ACTUATORS
- 9 - WEIGHT: 2.49 LB (1.13 Kg) APPROX
- 10 - UNIT PROVIDES NO SHAFT RESTORING FORCE. THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF SHAFT

CHARACTERISTICS	ELECTRICAL DATA
OPERATING TORQUE----- 0.37 LB FT (0.50 Nm) MAX	CONTACT ARRANGEMENT S P D T (EACH BASIC)
DIFFERENTIAL TRAVEL ----- 10°(MAX)	L23 20A-125, 250 OR 480 VAC; 10A-125 VAC "L"
DEGREES ACTUATED ----- 30°(APPROX)	1HP-125 VAC; 2HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC
	   

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0.4
TWO PLACE	.XX	±.015	±0.15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±
RAW MATERIAL-COMMERCIAL STANDARD			

THIRD ANGLE PROJECTION



DRAWN	KRB	16 FEB04
CHECK	MDM	16 FEB04

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

3D PTC	ASME Y14.5M-1994
--------	------------------

HoneywellTITLE
SWITCH, ENCLOSED

SIZE	DWG TYPE	DRAWING NAME	REV
C	I	12CX200E	A

SCALE	FULL	WEIGHT	9	SHEET	1 OF 1
-------	------	--------	---	-------	--------