

13AT10-S

M

DRAWING
NUMBER

6

ISSUE

REPLACES

PR-5037

CHECK

REVISIONS

A	CO 50566-B	WJM	MAY 82
B	CO-52725	KAG	JUN 83
C	CO-64947	DCG	MAR 89
D	CO66089	DAW	FEB 91
E	205419	JLH	22APR02

CHECK

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75

20 MAY 75


20 MAY 75

20 MAY 75

20 MAY 75


20 MAY 75

20 MAY 75

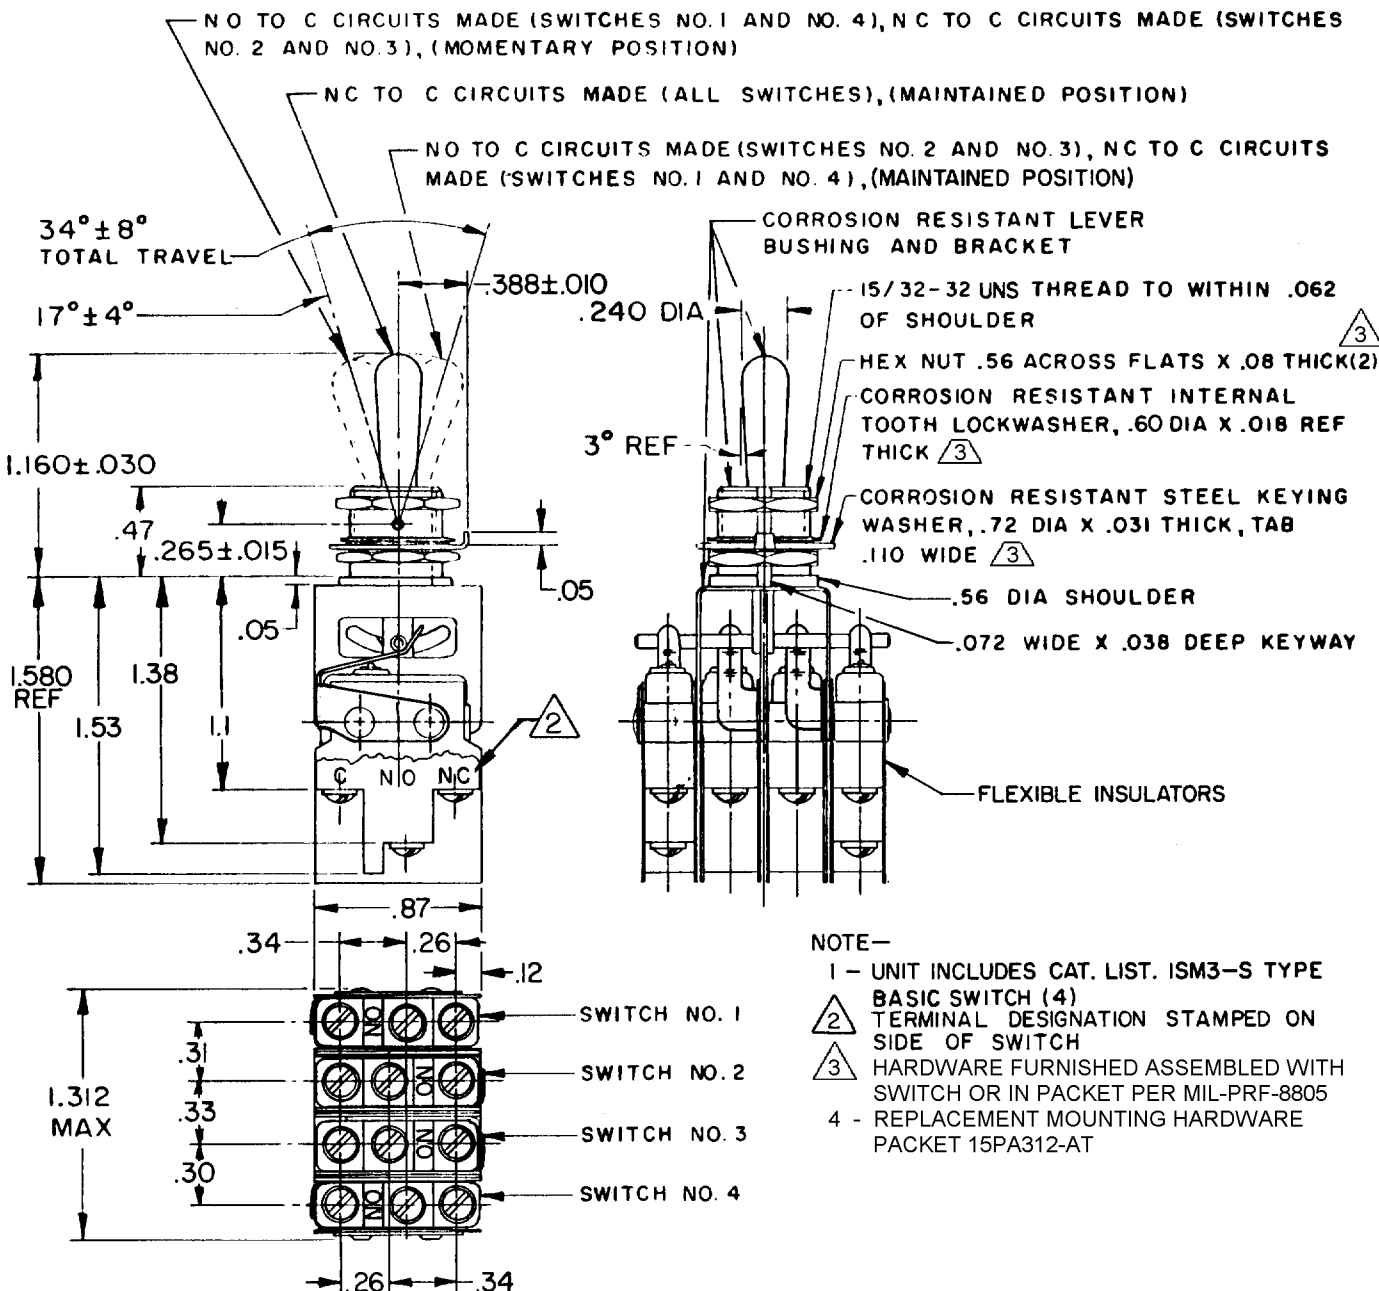

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

ELECTRICAL DATA

SCALE **FULL**

CONTACT ARRANGEMENT
S P D T (4)

DO NOT SCALE PRINT

250 VAC ----- 5 AMP

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE 1

30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL -- 3 AMP
50,000 FT -- 2.5 AMP
RESISTIVE ----- SEA LEVEL -- 5 AMP
50,000 FT -- 5 AMP
MAXIMUM INRUSH ----- 24 AMP

DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X X 0.8/03
ONE PLACE	X, X	0.4/018	X X X 0.38/015
TWO PLACES	X, XX	0.15/008	X X X 0.13/005
THREE PLACES	X, XXX		
ANGLES			

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT