


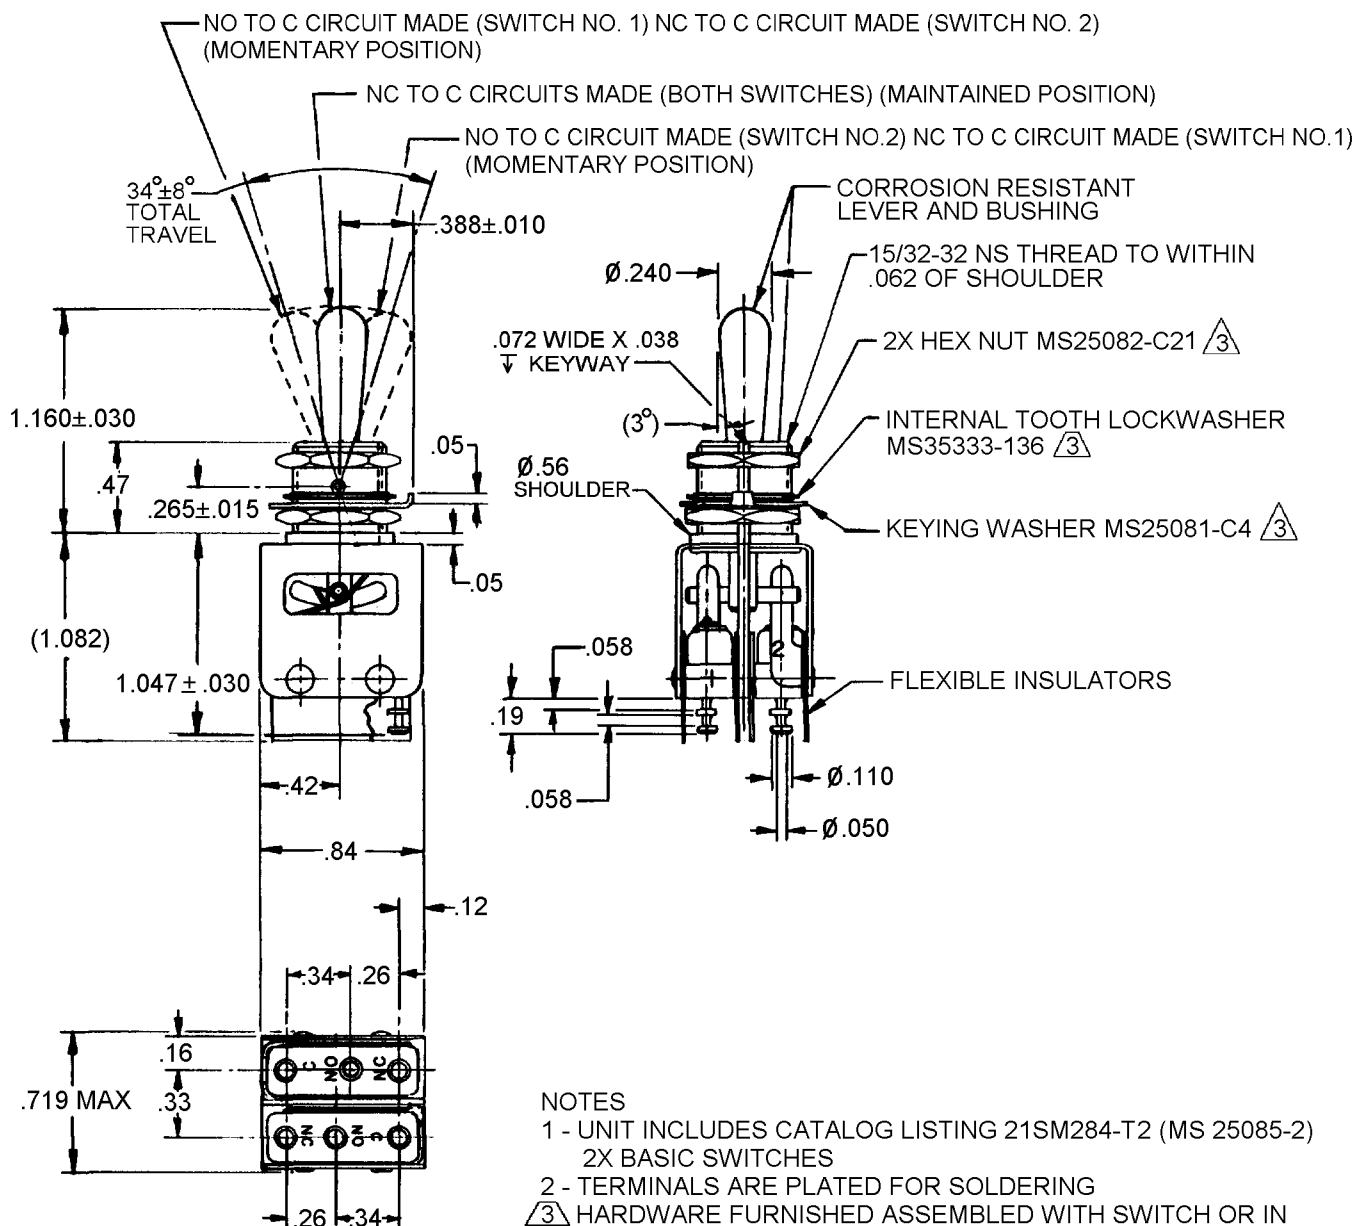


- NOTES
- 1 - UNIT INCLUDES CATALOG LISTING 21SM284-T2 (MS 25085-2) 2X BASIC SWITCHES
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - ③ HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
 - 4 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA311-AT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

DO NOT SCALE PRINT

CONTACT ARRANGEMENT
2XSPDT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

	SEA LEVEL		50,000 FT
LOAD	28 VDC	115 VAC	28 VDC
RESISTIVE	5	5	5
INDUCTIVE	3	5	2.5
LAMP	2.4	1.5	2.4

ONE PLACE (.0)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.005
ANGLES	±

WEIGHT .075 LB MAX