MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY TOGGLE SWITCH

CATALOG LISTING
13AT9-T2

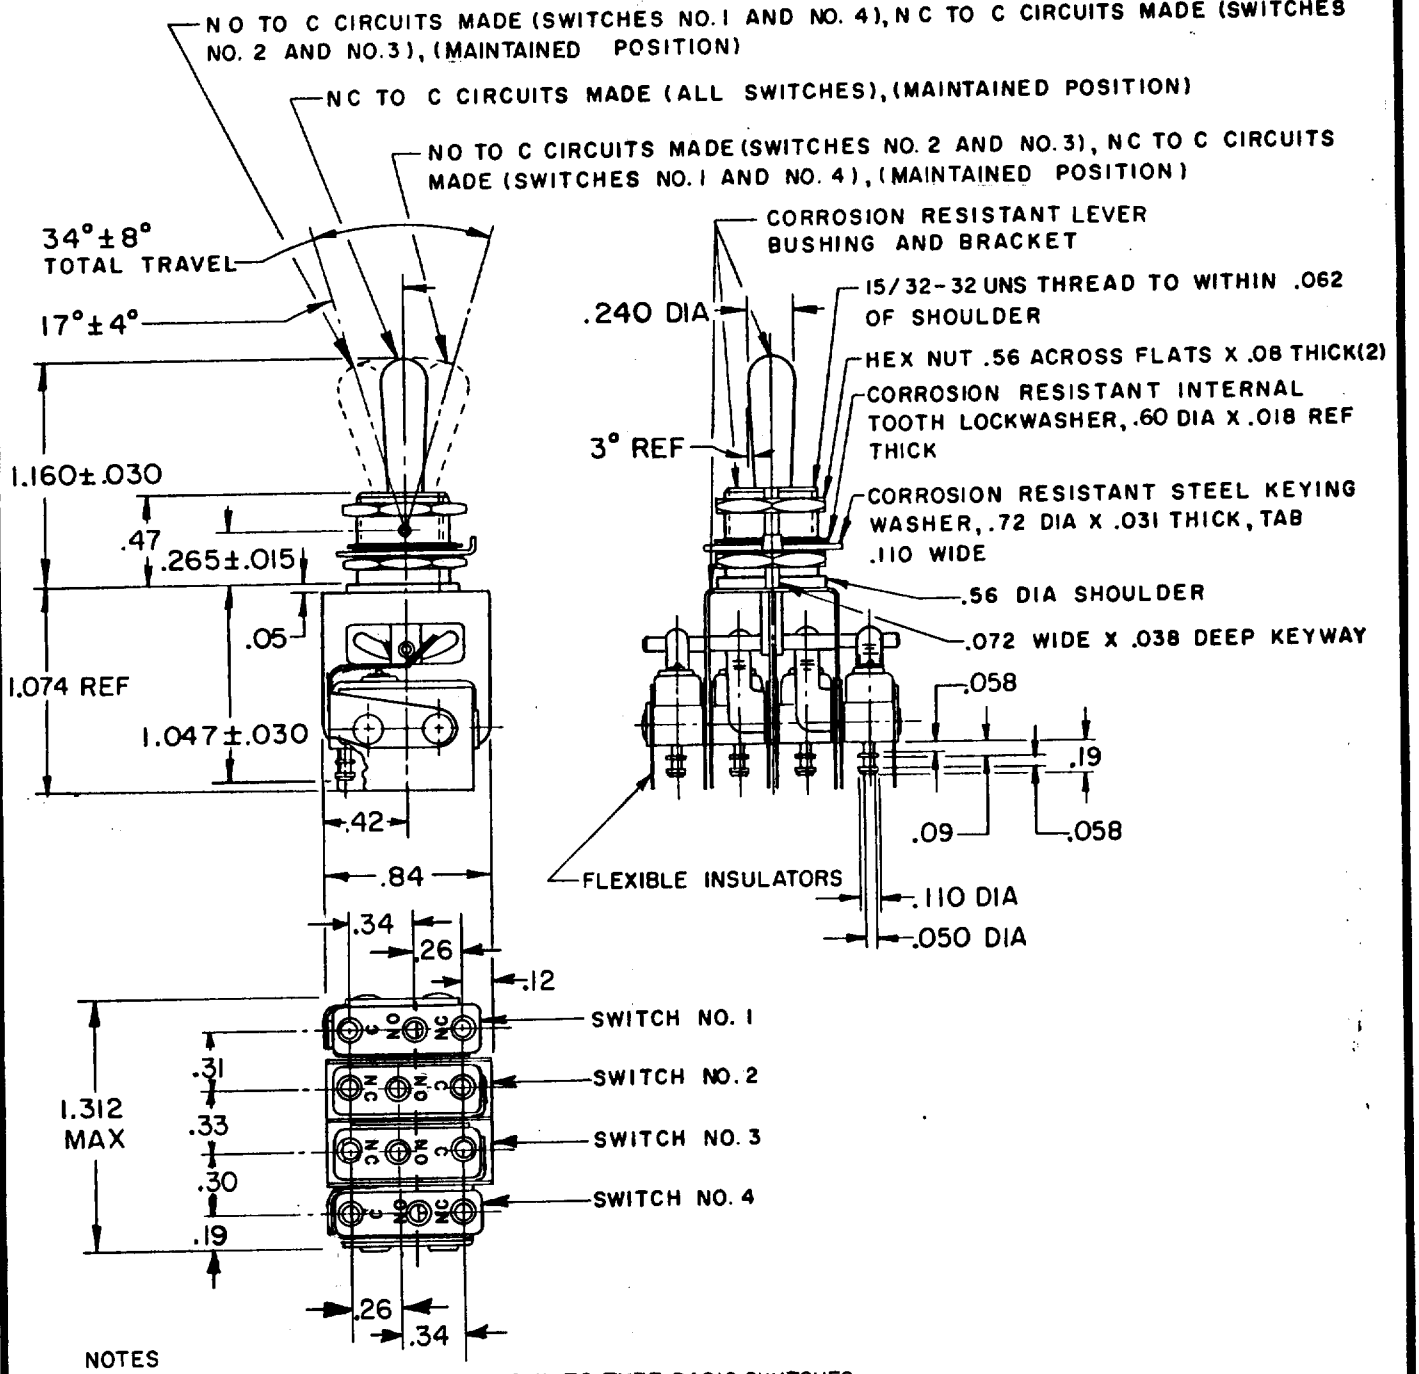

NOTES
1-UNIT INCLUDES (4) CAT. LIST. ISMI-T2 TYPE BASIC SWITCHES
2-TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
(4) S P D T

250 VAC - - - - - - - - - - - - - 5 AMP
30 VOLTS DC RATING
INDUCTIVE - - - - SEA LEVEL - - 3 AMP
50,000 FT - - 2.5 AMP
RESISTIVE - - - - SEA LEVEL - - 5 AMP
50,000 FT - - - 5 AMP
MAXIMUM INRUSH - - - - - - - - 24 AMP

SCALE FULL
DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

SI METRIC ☐ US CUSTOMARY ■
DESIGN UNITS

WEIGHT

M 13AT9-T2
DRAWING NUMBER
RELEASE NO. PR-6853
REPLACES
ISSUE X X 4
CHECK
REVISIONS
A CO 50566-B WJM 5 MAY 82
B CO-52725 KAG 2 JUN 83
C CO 66089 DAW 13 FEB 91
CHECK
23 NOV 77 CEB
CHECK
22 NOV 77 SLB
DRAWN
FO-52848-A