


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

1HS118

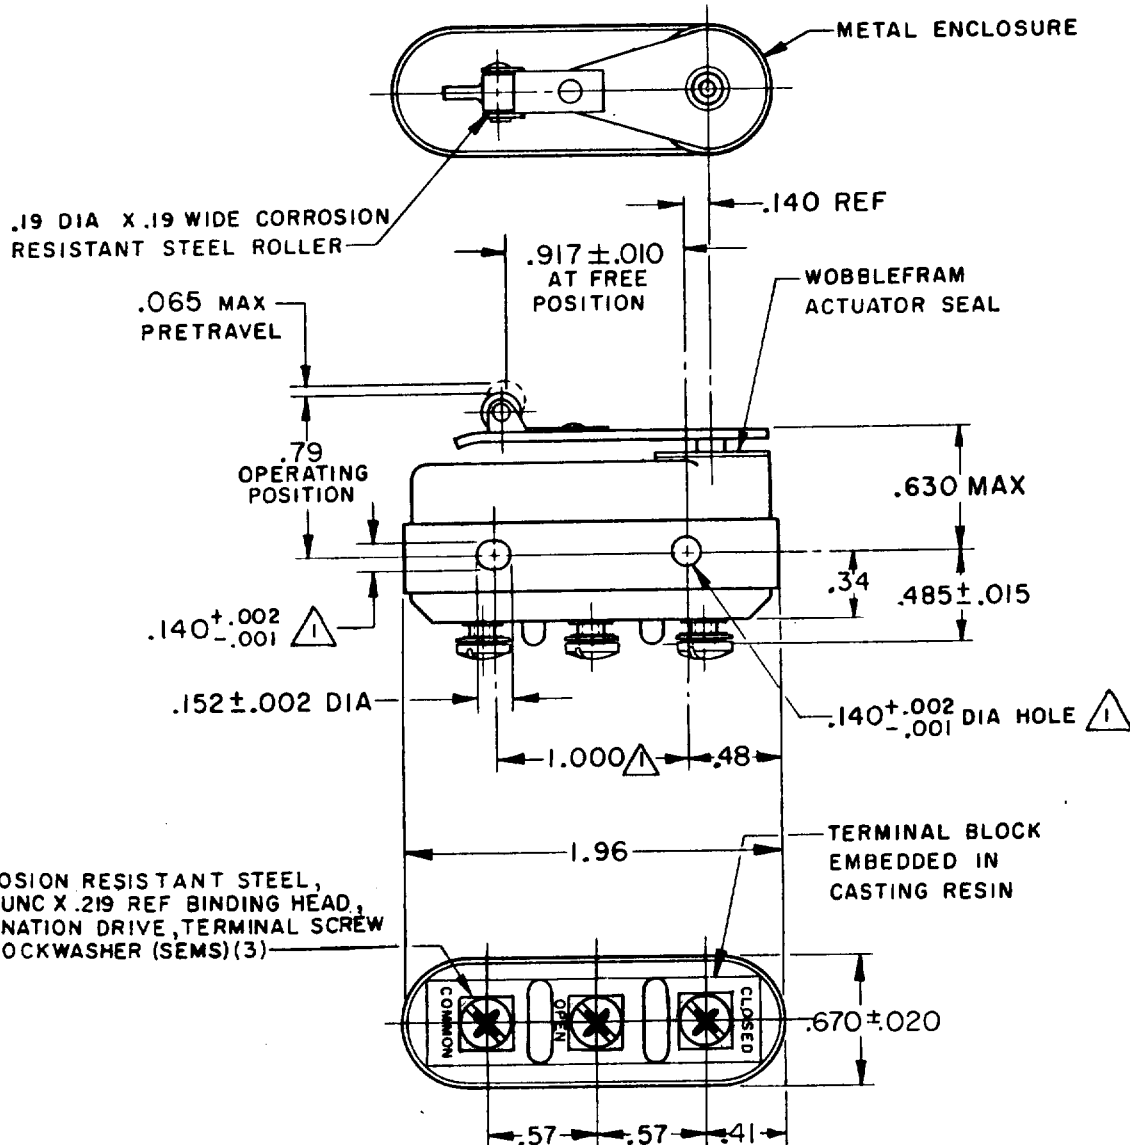


NOTE -

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM MINUS 65°F TO PLUS 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL	
OPERATING FORCE ----- 10-22 OZ		CONTACT ARRANGEMENT S P D T			DO NOT SCALE PRINT	
RELEASE FORCE ----- 4 OZ MIN		LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	TOLERANCES	
DIFFERENTIAL TRAVEL ----- .020 MAX		28 VDC	10 AMP	25 AMP	APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±	
OVERTRAVEL ----- .032 MIN		125 VAC	1 AMP	1 AMP	DESIGN UNITS	
		(SEA LEVEL - 100,000 FT.)				
		(SEA LEVEL - 70,000 FT.)				
		L277 1A-125VAC, 5A-28VDC				

1HS118

M

DRAWING NUMBER

7

ISSUE

8

REPLACES

PR-6721

RELEASE NO.

CHECK

7

8

8

CHECK

7

7

7

7

7

7

7

7

7

7

7

7

7

7

7

7

7

7

7

7

FO-52848-A

DRAWN

COLH

CHECK

77

15

SEPT

1993