


HONEYWELL
PART NUMBER
SEE TABLE

REV	DOCUMENT	CHANGED BY		CHECK
B	0060260	KNR	12JAN10	CMH
6 CATALOG LISTING	5 CIRCUIT MADE WITH TOGGLE LEVER IN			
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	
1TL127 - 6	MOM ON	NONE	OFF	
1TL127 - 2	OFF	NONE	ON	

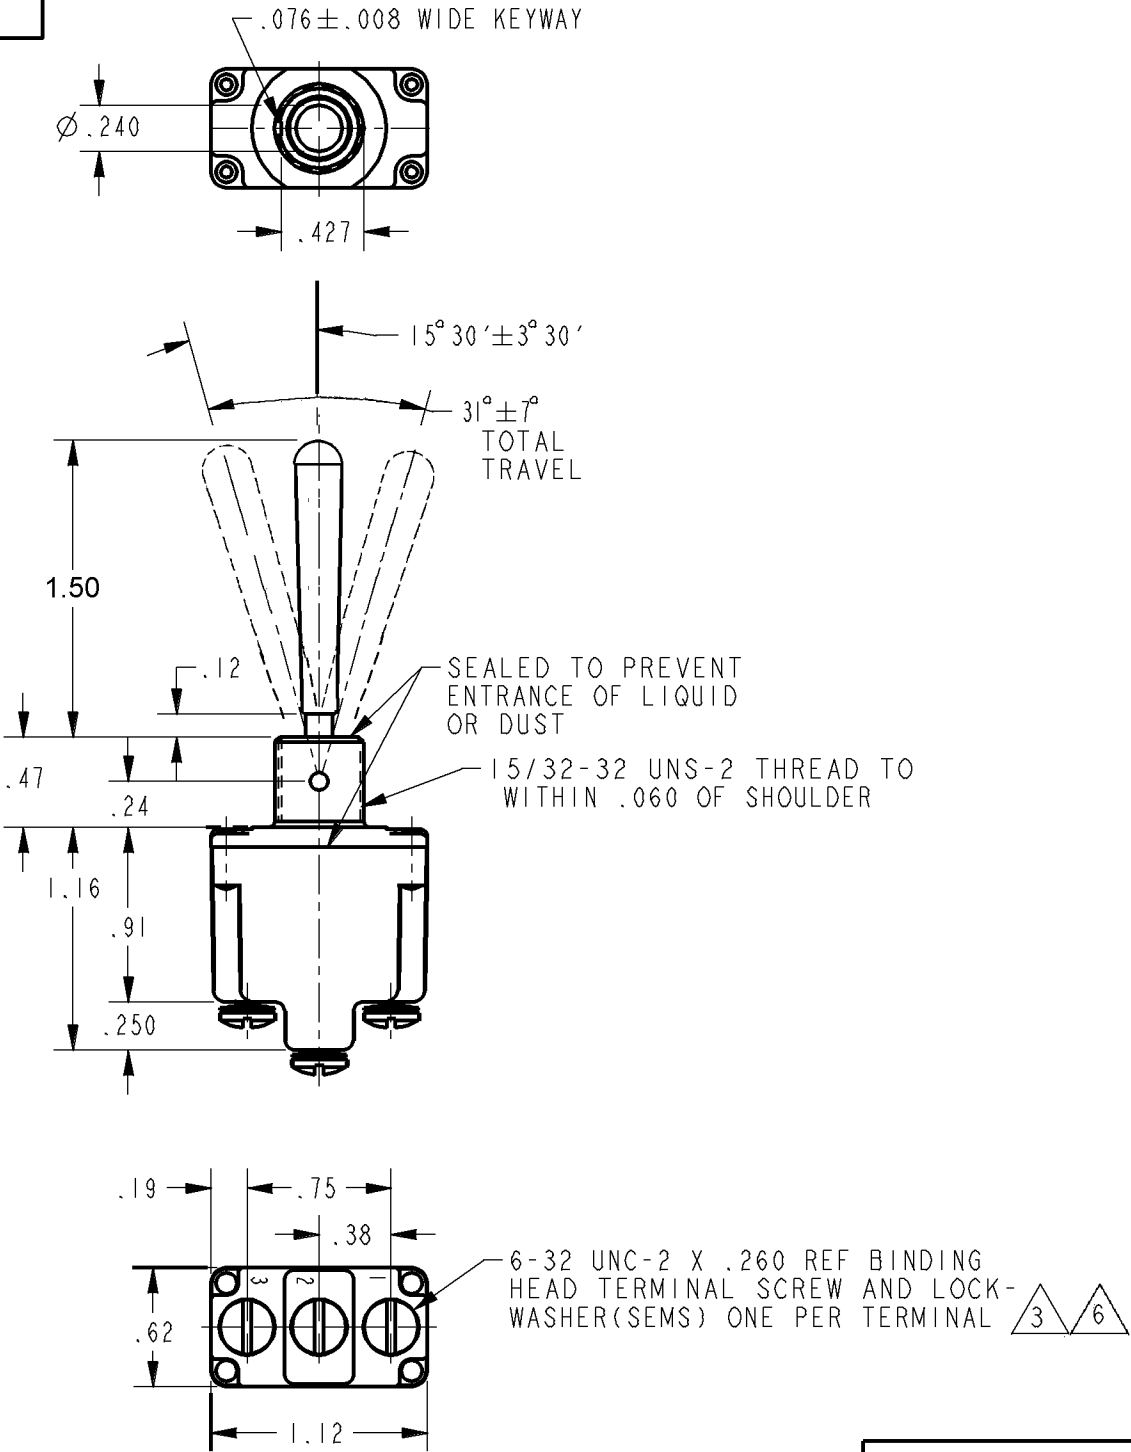

- NOTES:
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7
 - 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 6 - "NH" SUFFIX MUST BE ADDED TO SPECIFY NO HARDWARE (EX.1TL127-1-NH)

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:				DRAWN	KRB	29 SEP 08	Honeywell				
				CHECK	TSG	29 SEP 08					
NO PLACE X ± .040				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, TOGGLE				
ONE PLACE .X ± .030											
TWO PLACE .XX ± .015											
THREE PLACE .XXX ± .005				INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
FOUR PLACE .XXXX ± .0005							B	I	1TL127 SERIES CHART 1		B
ANGLES ± 2°				RASTER			SCALE	NONE			SHEET 1 OF 1
THIRD ANGLE PROJECTION 											

10A-125, 250, 277 VAC
1/4 HP-125VAC: 1/2 HP-250, 277 VAC
3A-125VAC "L" CODE LI92

