

CATALOG LISTING

2001EN1-6

PAGE 1 OF 1

REPLACES

PR-17808

CHECK

ISSUE

5

REVISIONS

A	PR17808
	MAM
27	NOV 89
B	C072022
	TSM
8	SEP 92
C	CO-75668-B
	J A V
20	OCT 93
D	C094408
	J A F
24	MAR 99

DDM/CAD

DRAWN

MAM

27

NOV

89

CHECK





GRT

28


NOV

89

CHECK

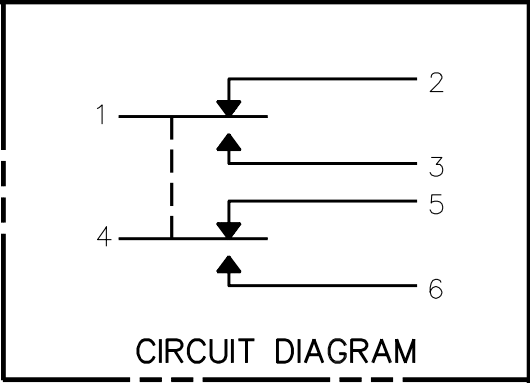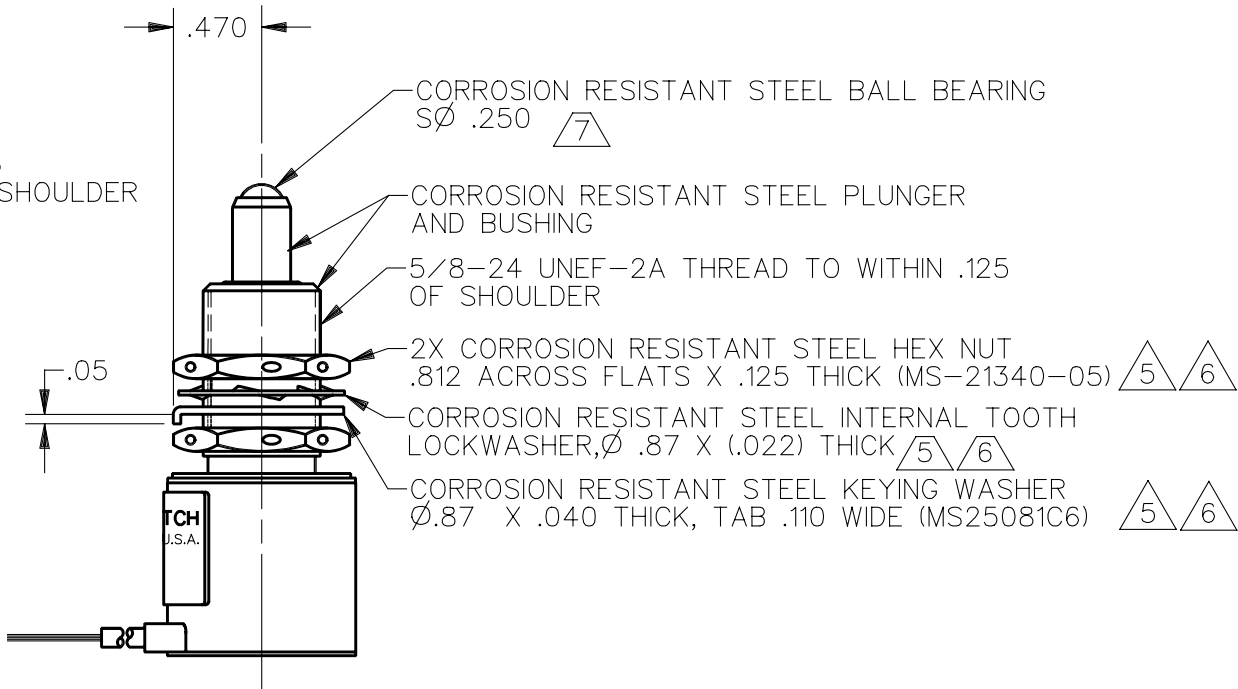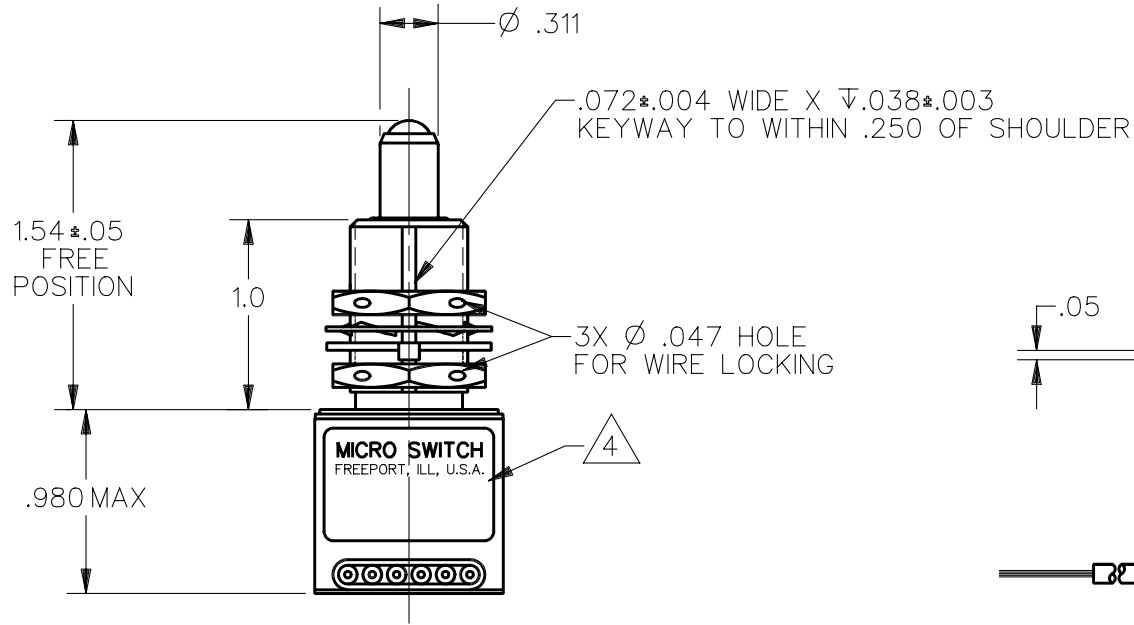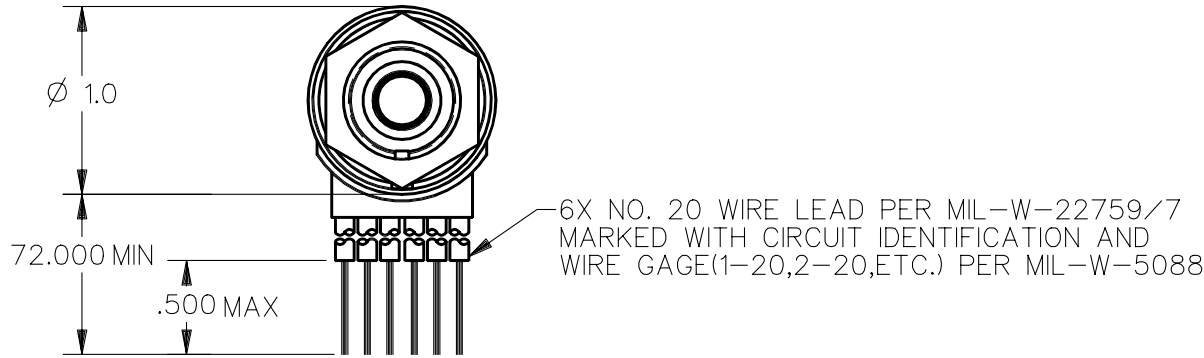

- NOTES
- 1 – CORROSION RESISTANT STEEL ENCLOSURE
 - 2 – SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 – COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 4 – CIRCUIT DIAGRAM, DATE CODE, FED. MFG. CODE AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 5 – REPLACEMENT MOUNTING HARDWARE – PACKET: 19PA8
 - 6 – HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - 7 – ROLLER BALL BEARING PLUNGER FOR USE WITH 20° MAX RISE ON CAM OR SLIDE ACTUATION

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH				THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL
OPERATING FORCE — — — — 6-12 LB		CONTACT ARRANGEMENT			DO NOT SCALE PRINT
FULL OVERTRAVEL FORCE --- 30 LB MAX		2X S P D T			
RELEASE FORCE — — — — 4 LB MIN		LOAD	28 VDC		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT .48 LB
PRETRAVEL — — — — .040 MAX			SEA LEVEL	50,000 FT.	
DIFFERENTIAL TRAVEL — — — .020 MAX		RES	4	4	
OVERTRAVEL — — — — .250 MIN		IND	2	2	

ANSI Y14.5M-1982 APPLIES