

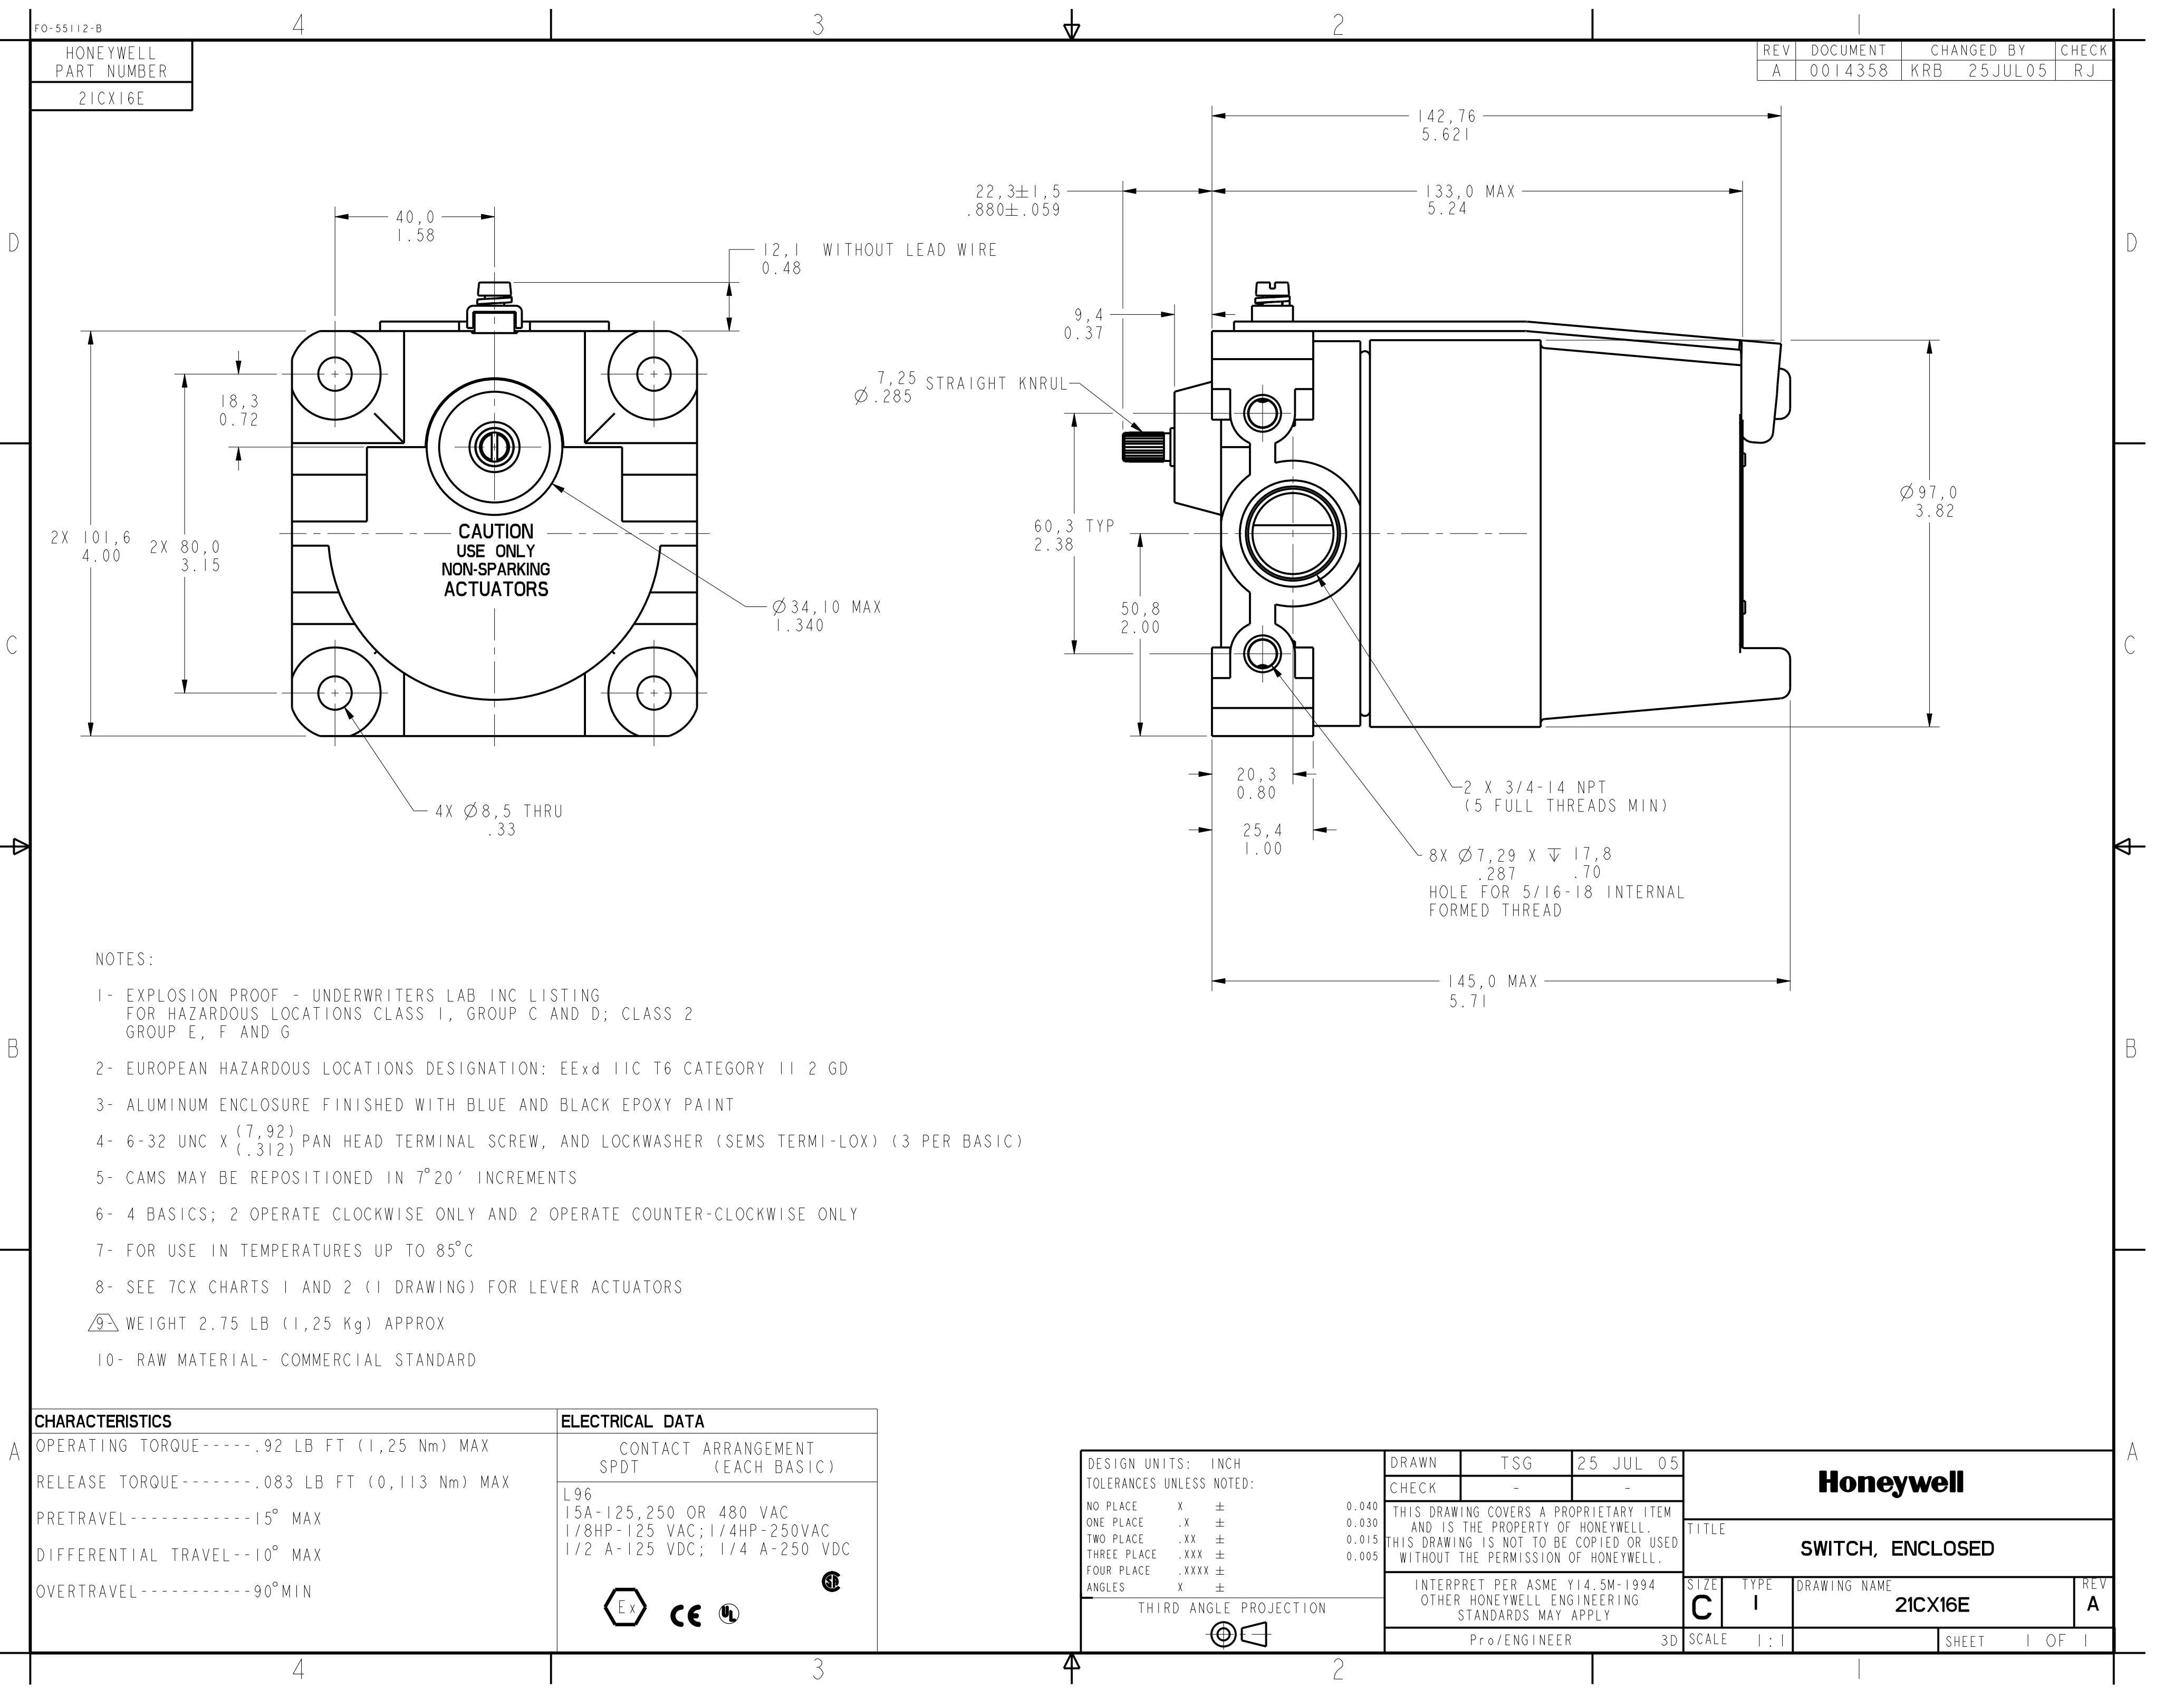


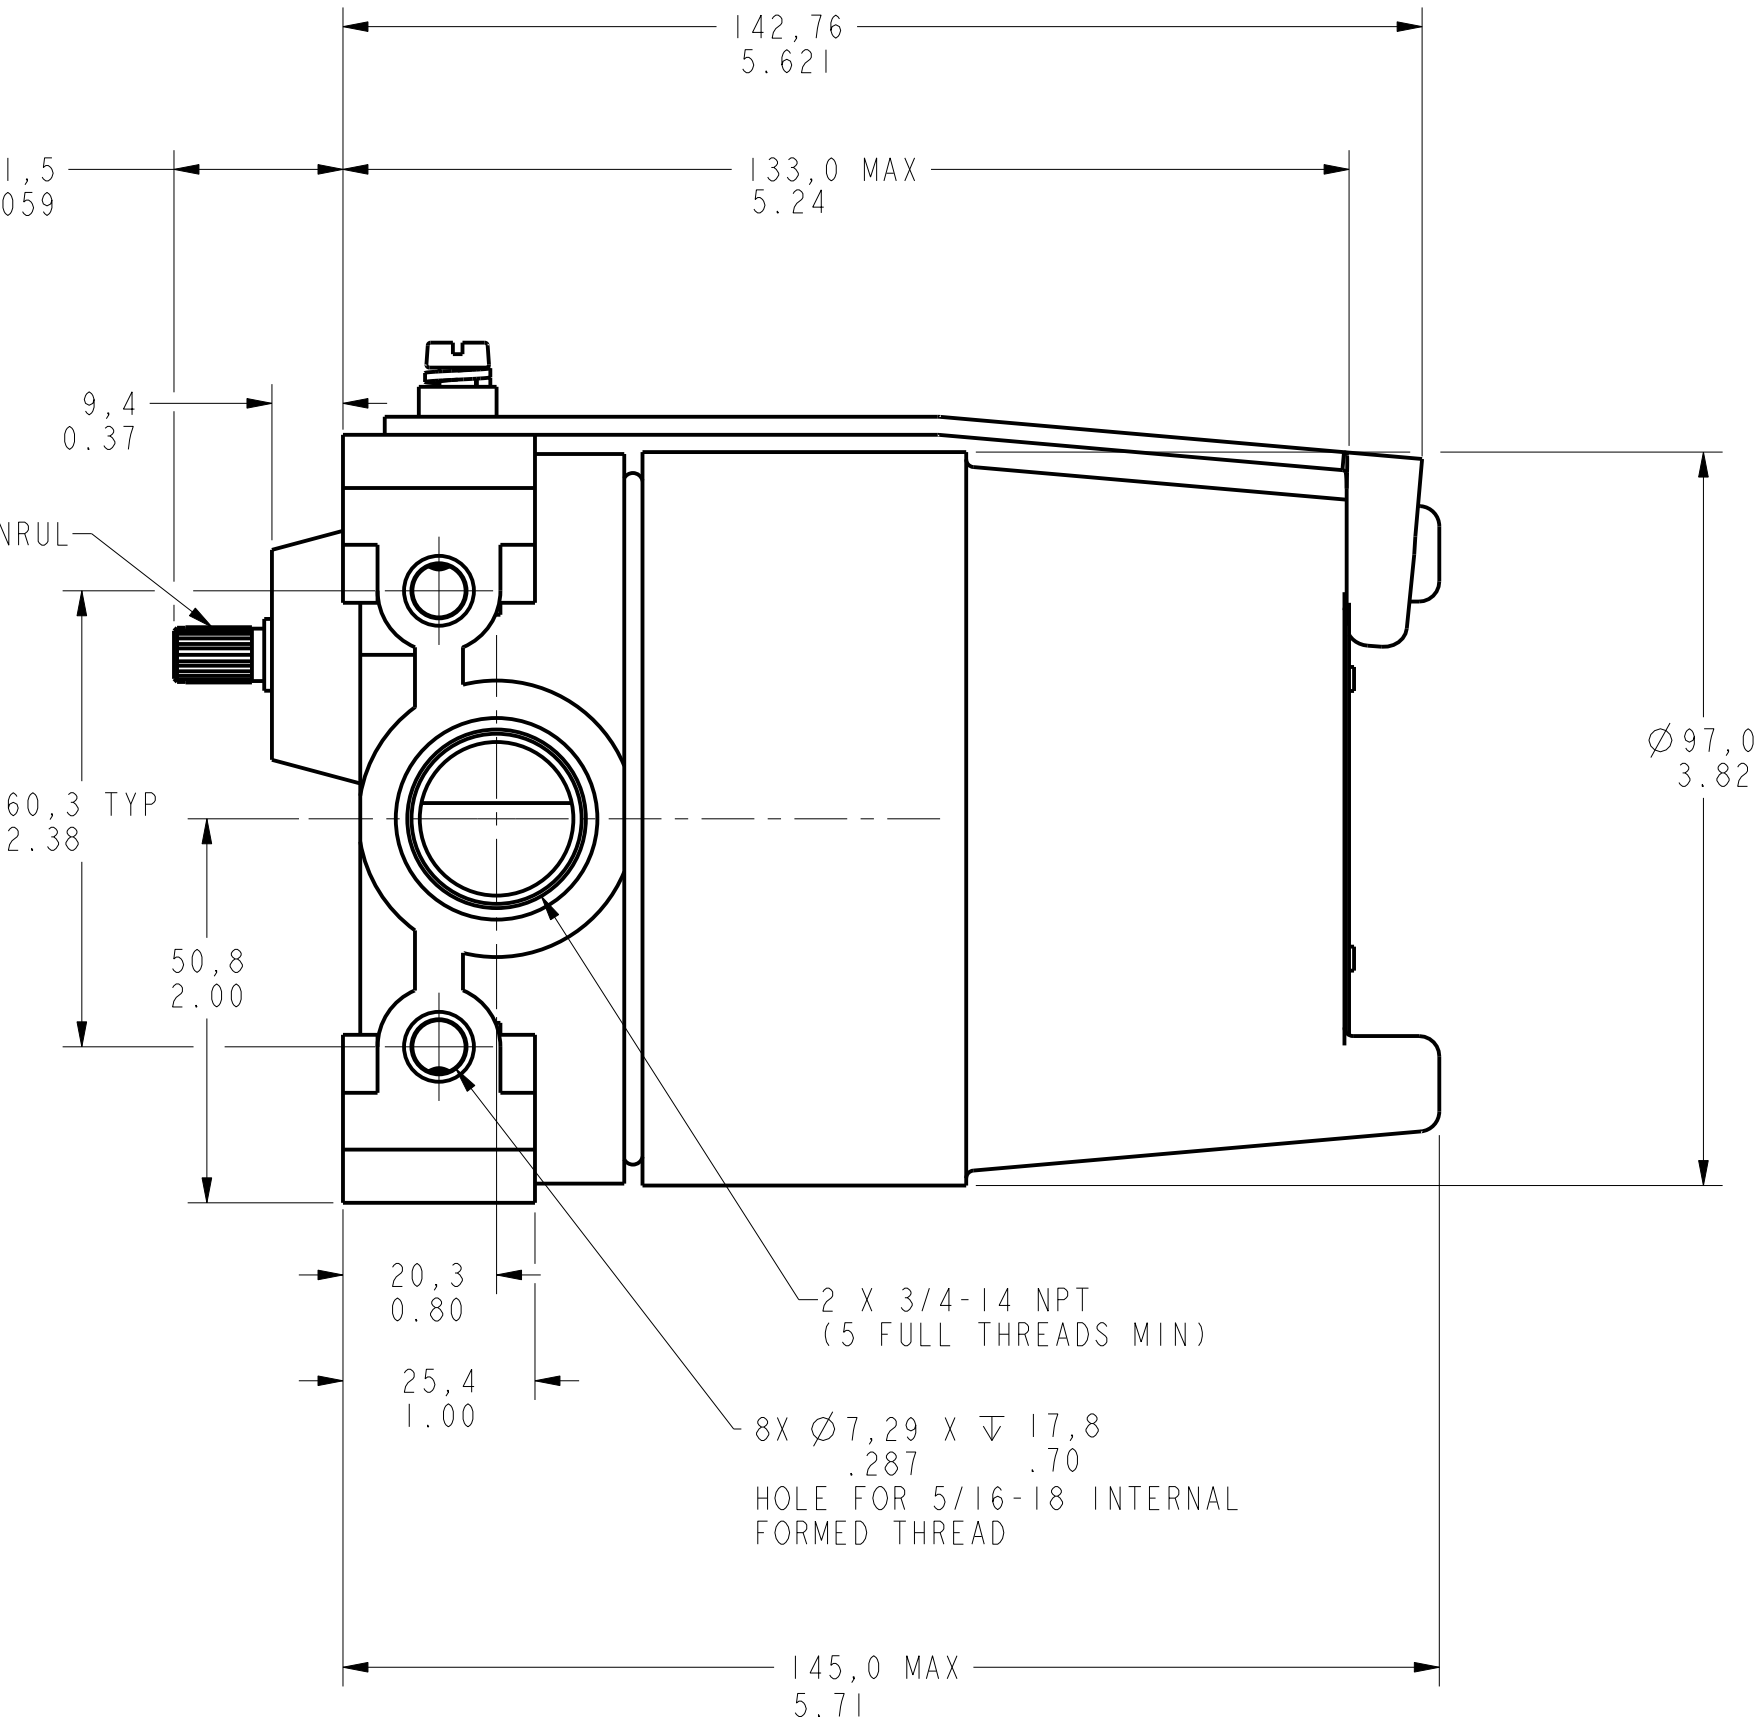


HONEYWELL
PART NUMBER
21CX16E

REV	DOCUMENT	CHANGED BY	CHECK
A	0014358	KRB 25JUL05	RJ

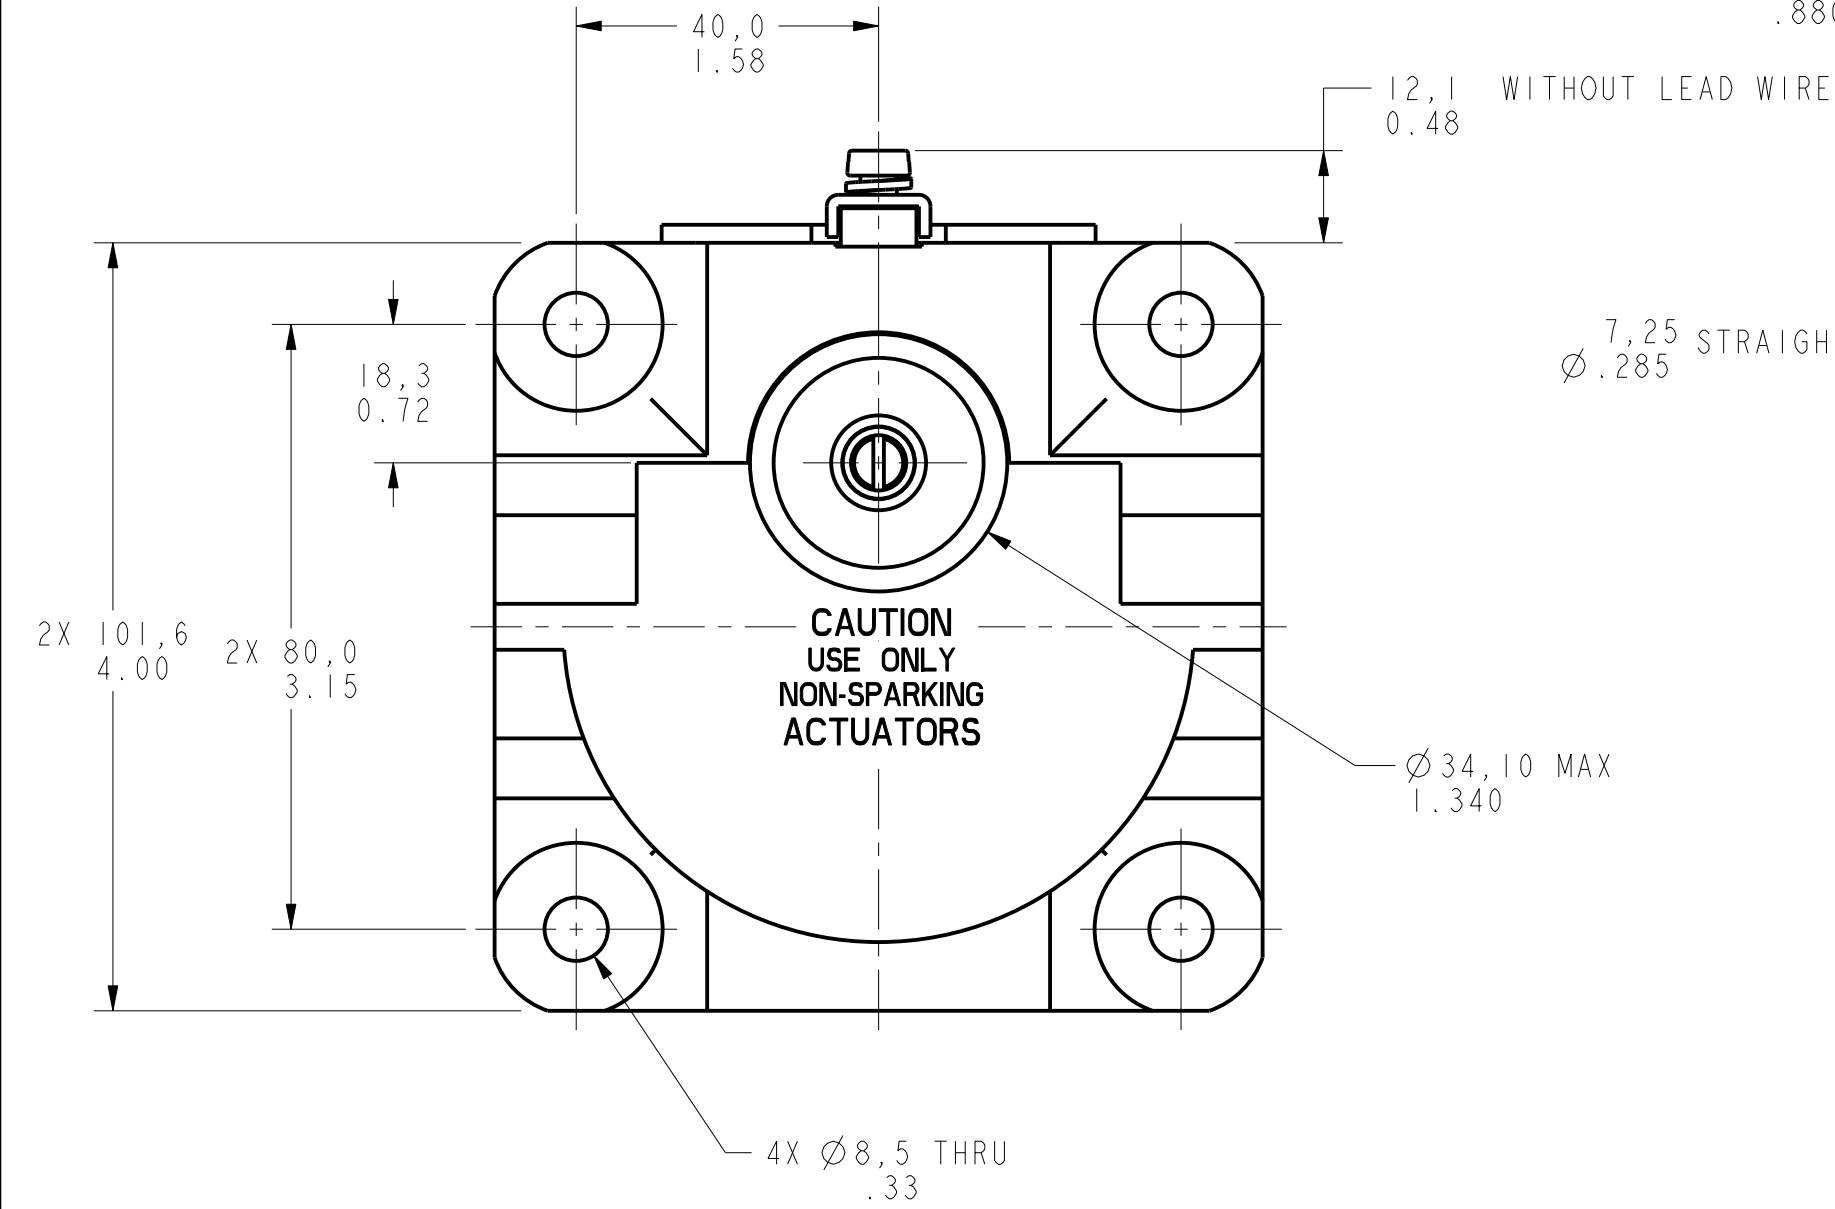

- NOTES:
- EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUP C AND D; CLASS 2 GROUP E, F AND G
 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
 - 6-32 UNC X ^(7,92)_(.312) PAN HEAD TERMINAL SCREW, AND LOCKWASHER (SEMS TERMI-LOX) (3 PER BASIC)
 - CAMS MAY BE REPOSITIONED IN 7°20' INCREMENTS
 - 4 BASICS; 2 OPERATE CLOCKWISE ONLY AND 2 OPERATE COUNTER-CLOCKWISE ONLY
 - FOR USE IN TEMPERATURES UP TO 85°C
 - SEE 7CX CHARTS 1 AND 2 (1 DRAWING) FOR LEVER ACTUATORS
 - WEIGHT 2.75 LB (1,25 Kg) APPROX
 - RAW MATERIAL- COMMERCIAL STANDARD

CHARACTERISTICS	ELECTRICAL DATA
OPERATING TORQUE-----.92 LB FT (1,25 Nm) MAX	CONTACT ARRANGEMENT SPDT (EACH BASIC)
RELEASE TORQUE-----.083 LB FT (0,113 Nm) MAX	L96
PRETRAVEL-----15° MAX	15A-125,250 OR 480 VAC
DIFFERENTIAL TRAVEL--10° MAX	1/8HP-125 VAC; 1/4HP-250VAC
OVERTRAVEL-----90° MIN	1/2 A-125 VDC; 1/4 A-250 VDC
	   

DESIGN UNITS: INCH		DRAWN	TSG	25 JUL 05	Honeywell			
TOLERANCES UNLESS NOTED:		CHECK	-	-				
NO PLACE	X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.	TITLE				SWITCH, ENCLOSED	
ONE PLACE	.X ±							
TWO PLACE	.XX ±							
THREE PLACE	.XXX ±							
FOUR PLACE	.XXXX ±							
ANGLES	X ±	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME	REV	
THIRD ANGLE PROJECTION		Pro/ENGINEER 3D		C	I	21CX16E	A	
								
				SCALE	1:1	SHEET	1 OF 1	