
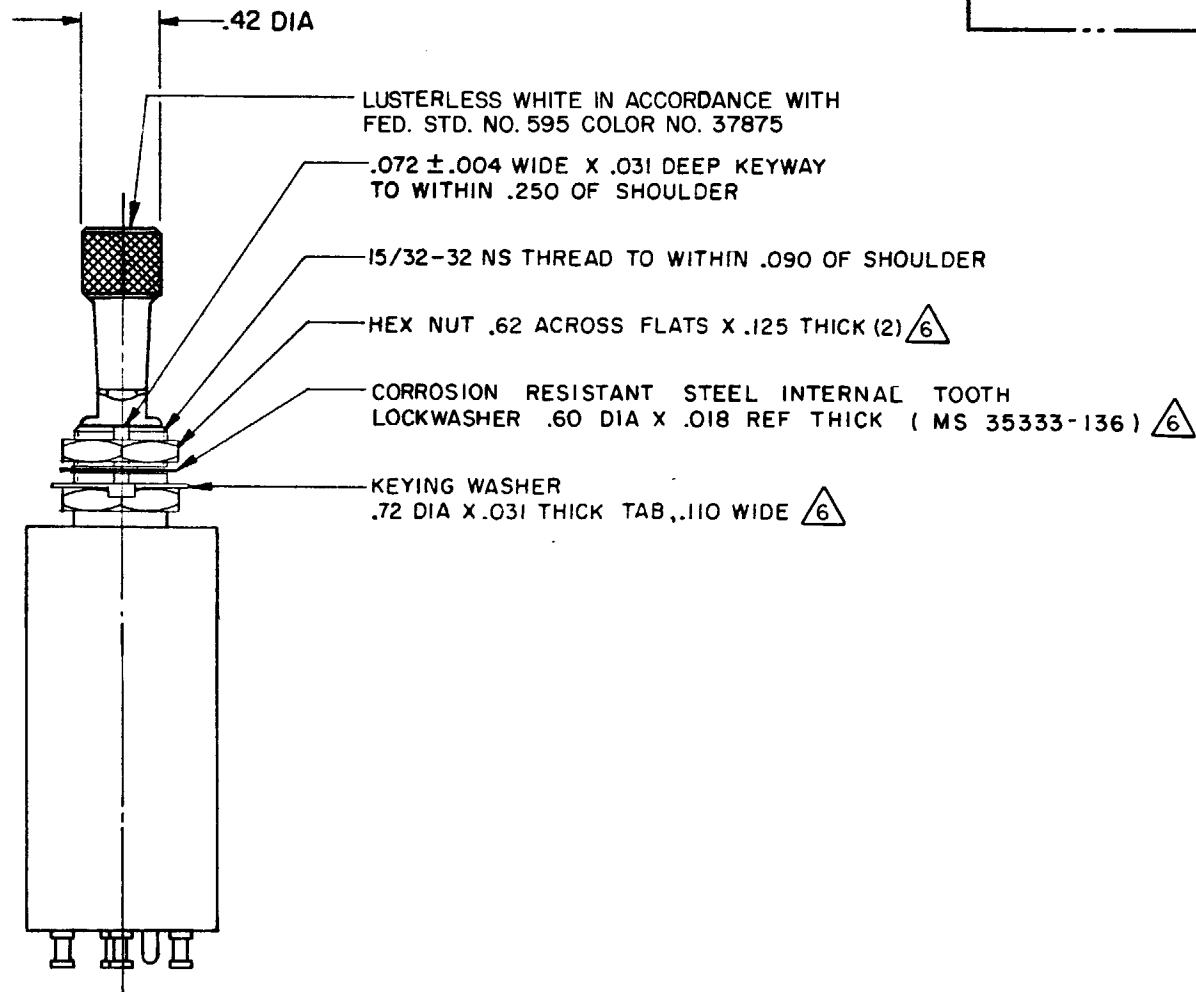
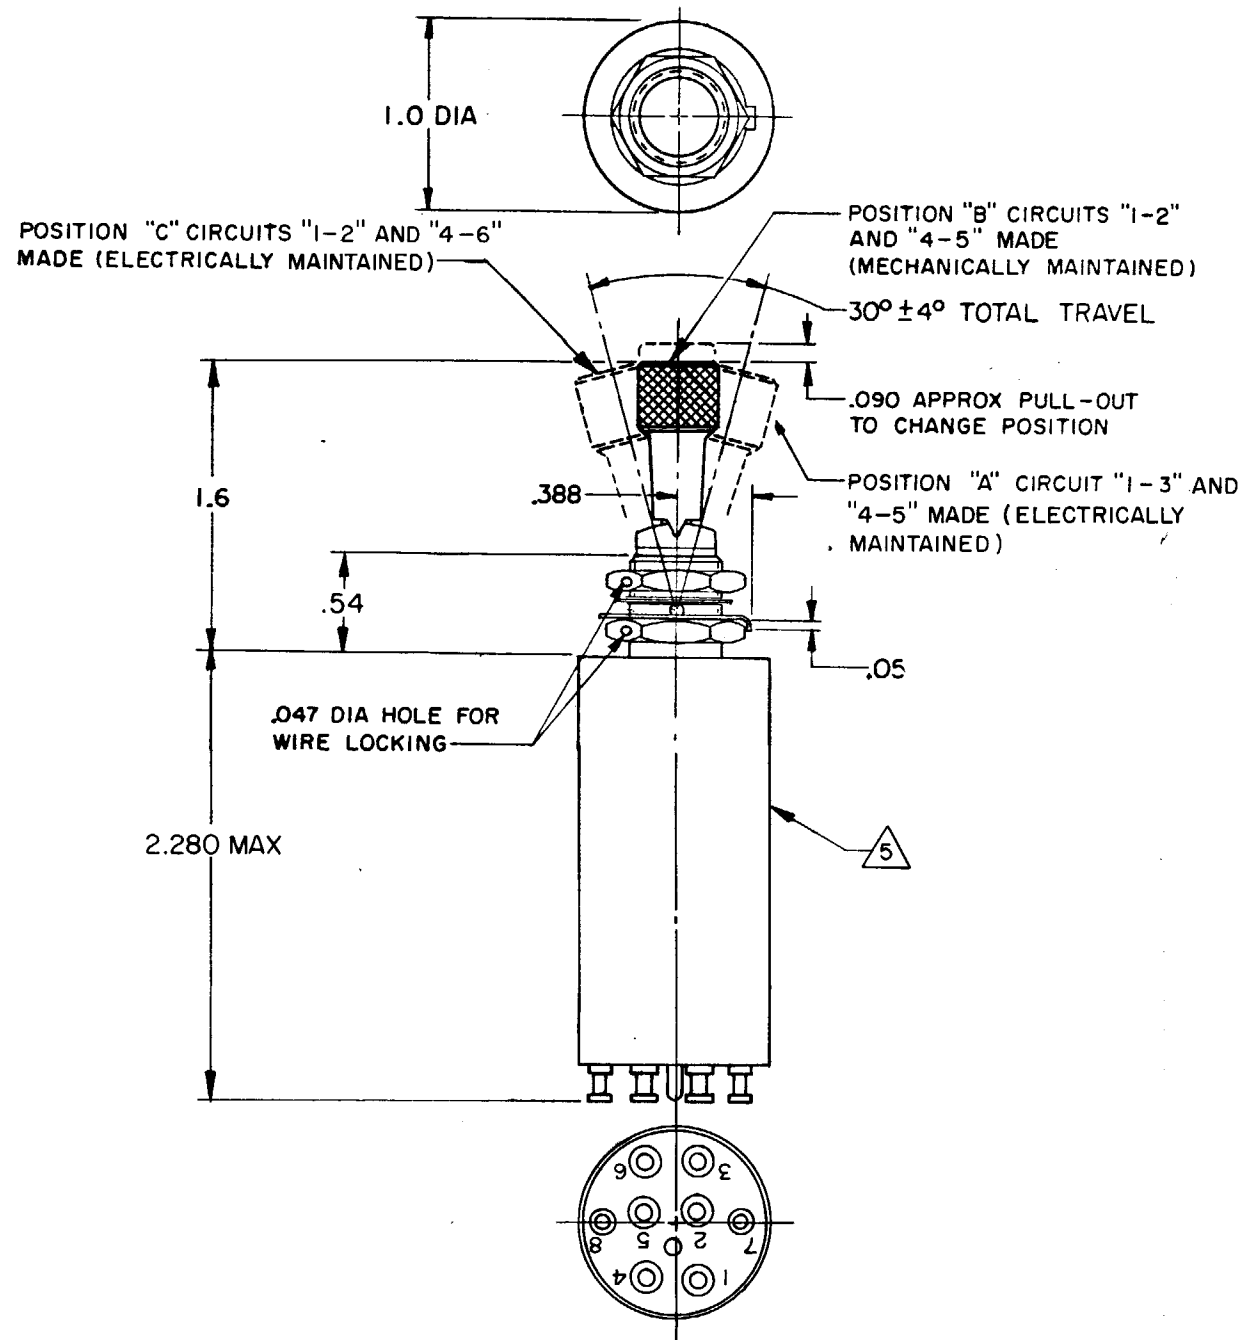


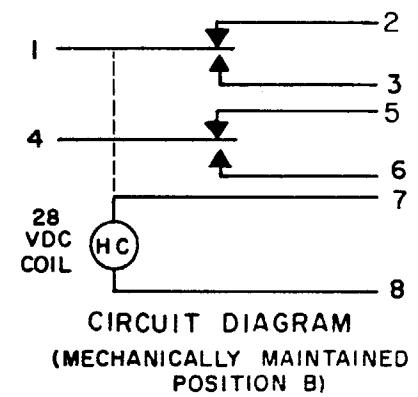

NOTES :

- 1 - EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIAL OR ARE SUITABLY PROTECTED TO PREVENT CORROSION. ENCLOSURE FINISHED WITH BLUE EPOXY BASED ENAMEL COLOR NO. 25184 PER FEDERAL STANDARD 595
- 2 - SWITCH SEALED PER MIL-S-5594
- 3 - HOLD IN VOLTAGE: THE MINIMUM SPECIFIED VOLTAGE AT WHICH THE LEVER WILL REMAIN ACTUATED. HOLD IN MAY OCCUR AT A LOWER VALUE. DROP OUT VOLTAGE: THE VOLTAGE RANGE IN WHICH THE LEVER WILL BE RELEASED
- 4 - CIRCUITS CAN BE TRANSFERRED MANUALLY, ENERGIZING THE COIL WILL NOT CAUSE TRANSFER OF CIRCUITS
- 5 - CIRCUIT IDENTIFICATION IS SHOWN ON SWITCH
- 6 - HARDWARE MAYBE FURNISHED UNASSEMBLED PER MIL-S-5594

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
SOLENOID RATING AT 20° C	CONTACT ARRANGEMENT S-P-D T(2)	DO NOT SCALE PRINT
STEADY STATE LIMITS ———— 20-29 VDC	VOLTAGE	UNLESS OTHERWISE NOTED
HOLD-IN ————— 15 VDC	RATING IN AMPERES	DIMENSIONS ARE IN INCHES
DROP OUT ————— 0-15 VDC	SEA LEVEL	TOLERANCES ARE:
OPERATING FORCE ————— 7 LBS MAX	65,000 FT	ONE PLACE (.0) ±.030
OVERRIDE FORCE AT 30 VDC ——— 10 LBS MAX	INRUSH RES IND MOTOR INRUSH RES IND MOTOR	TWO PLACE (.00) ±.015
COIL RESISTANCE ——— 220 OHM MIN	28 VOLTS DC	THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT 6.0 OZ MAX

27ET49-T-E

N

DRAWING
NUMBER

ISSUE	5	
5		
5		

REVISONS		
A	NEW DWG PR-4641	
K	P	K
5	DEC	74
B	CO 50162	
	WJM	
5	OCT	81
C	CO 53400	
	G R T	
15	JUL	83
D	C054089	
	J A P	
8	DEC	83

CHECK

CHECK

74

31

ECX	I
-----	---

74

DEC

K

100-80378-003