
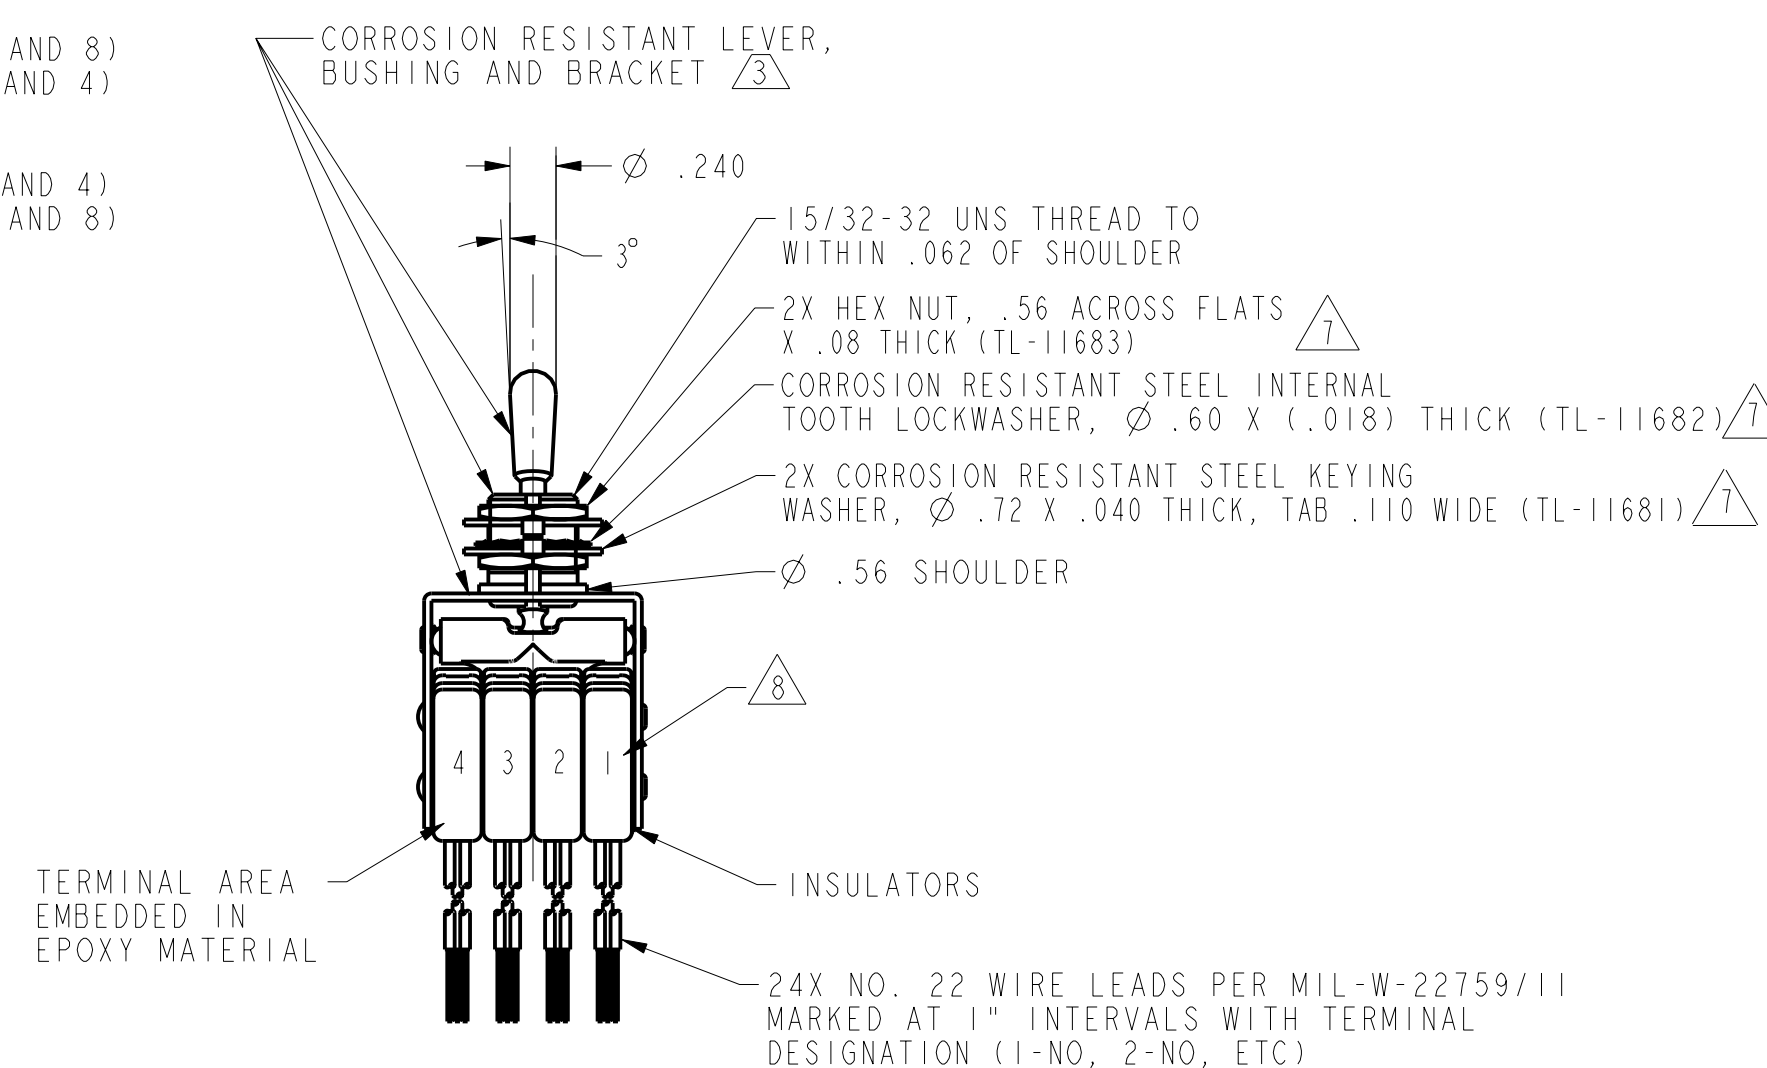
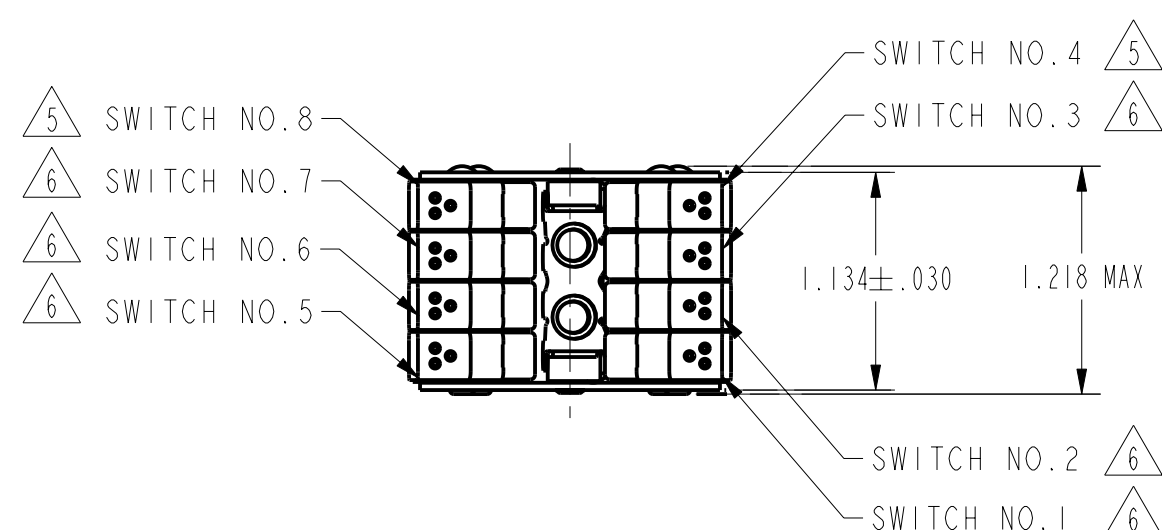


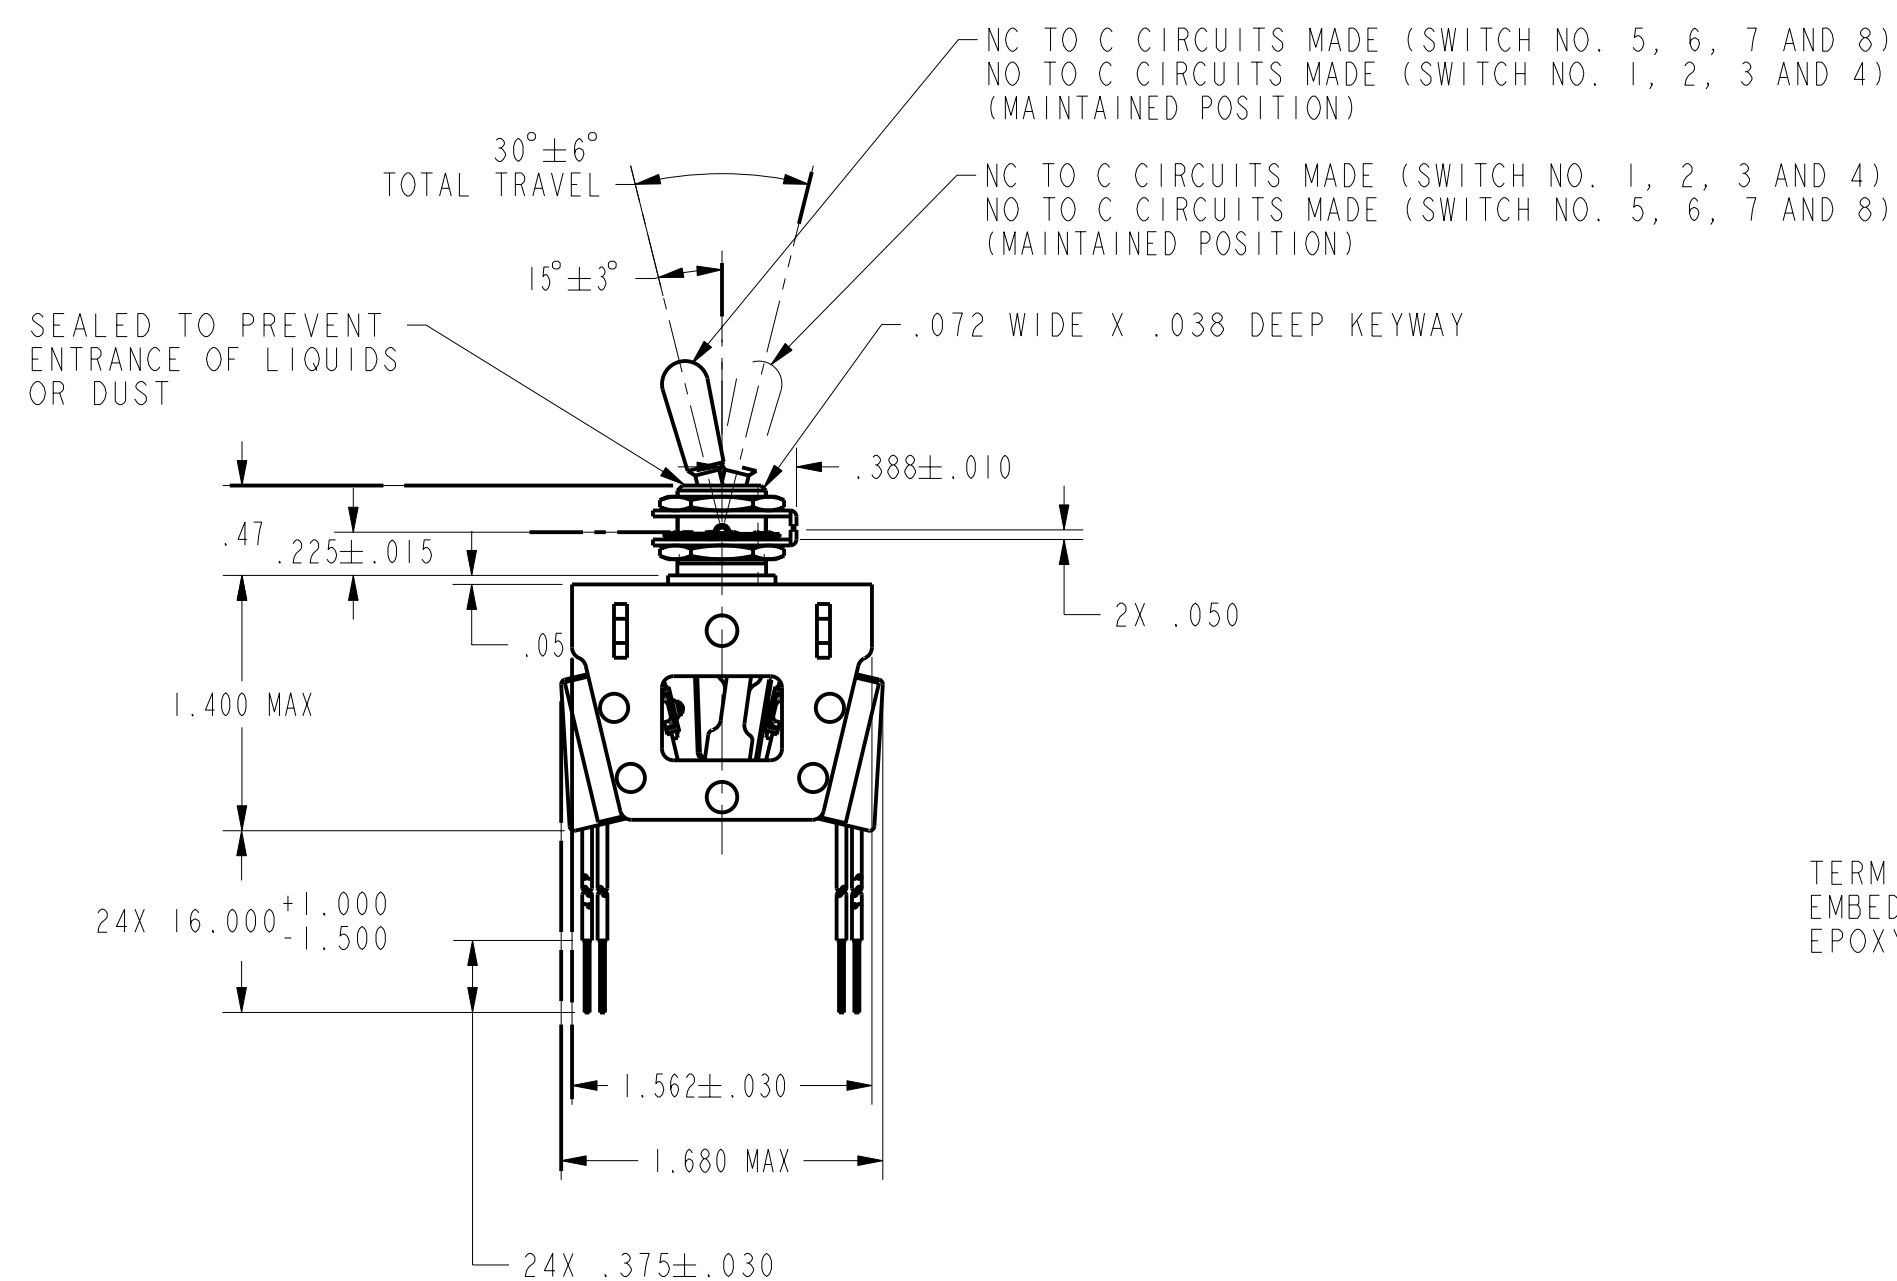

NOTES

- 1 - UNIT INCLUDES 41ISM TYPE BASICS
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - DULL FINISH ON LEVER AND BUSHING
- 4 - 41ISM CONSTRUCTION PROVIDES SPLASH AND DUST RESISTANCE
- 5 - SILVER CONTACT BASICS
- 6 - GOLD CONTACT BASICS
- 7 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET
19PA170-AT PER MIL-PRF-8805
- 8 - 8X BASIC SWITCH ID MARKED THIS AREA
- 9 - REPLACEMENT MOUNTING HARDWARE PACKET 19PA170-AT

ELECTRICAL DATA 5	
CONTACT ARRANGEMENT 2X S P D T	
30 VOLTS DC RATING INDUCTIVE----SEA LEVEL---3 AMP RESITIVE-----SEA LEVEL---5 AMP	
ELECTRICAL DATA 6	
CONTACT ARRANGEMENT 6X S P D T	
30 VOLTS DC RATING INDUCTIVE----SEA LEVEL-1/2 AMP 50,000 FT-1/2 AMP RESITIVE-----SEA LEVEL---1 AMP 50,000 FT---1 AMP MAXIMUM INRUSH-----2 AMP	

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division


FED. MFG. CODE 91929

**ASSEMBLY-
TOGGLE SWITCH**

CATALOG LISTING

28AT20

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT