

HONEYWELL

2PB901-T2

See full Datasheet below...

onlinecomponents.com

THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW



BUY NOW




masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91828

ASSEMBLY - PUSHBUTTON SWITCH

CATALOG LISTING
2PB901-T2
FAA-PMA

CATALOG LISTING
PAGE 1 OF 1
REPLACES
2PB901-T2
SR 11753
11 NOV '64
CHECK B N U
11 NOV '64
CHECK J H Z
11 NOV '64
CHECK L S D
11 NOV '64
FORMTEK
DRAWN
L L D
9 NOV 64

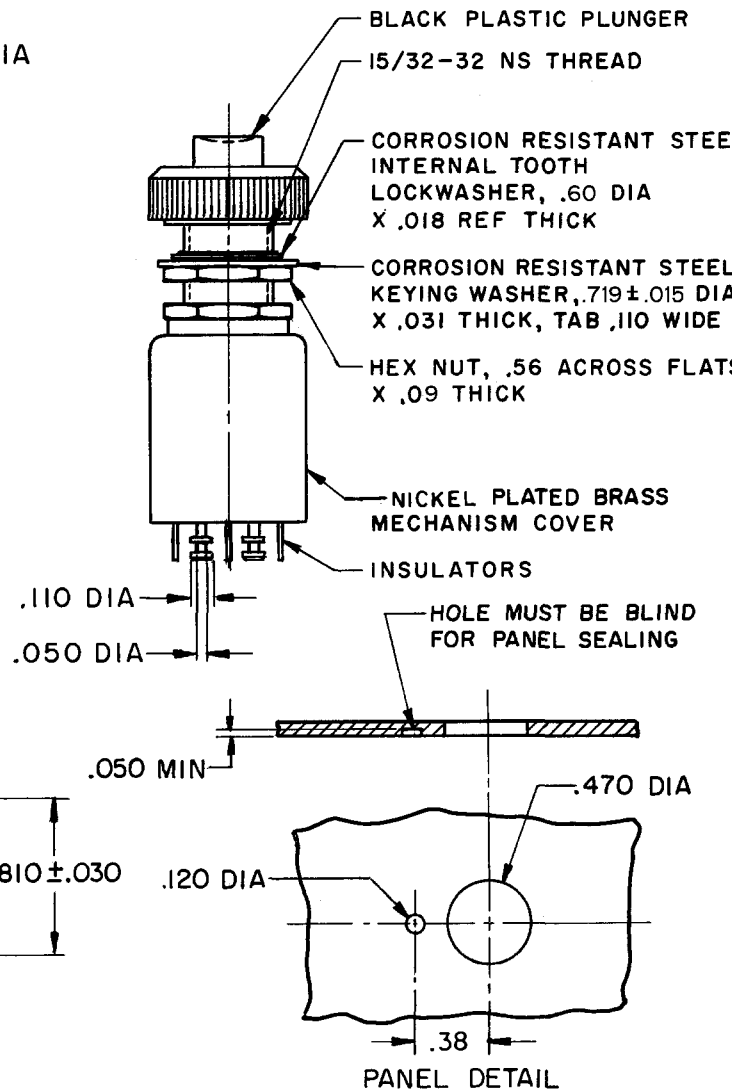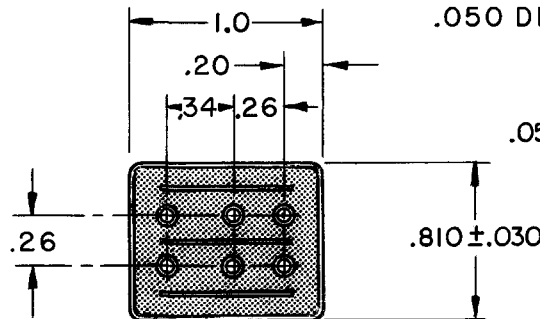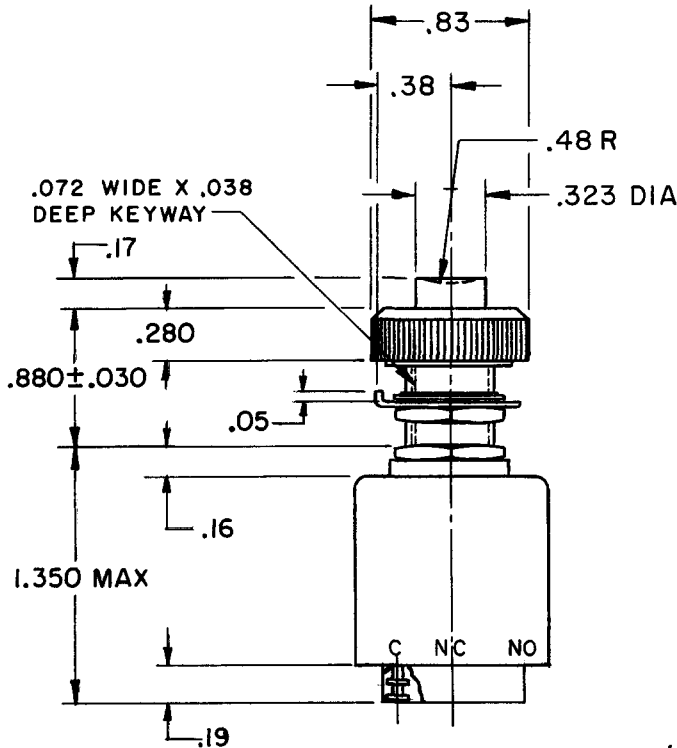

NOTES

- 1-UNIT INCLUDES "IISM" TYPE BASIC SWITCH (2) SEALED IN COVER
- 2-TERMINALS ARE PLATED FOR SOLDERING
- 3-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 4-UNIT WILL WITHSTAND 10PSI WATER PRESSURE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — 35 OZ APPROX
TOTAL TRAVEL — .105 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT S P D T (2)			
250 VAC	—	—	5 AMP
30 VOLTS DC RATING			
INDUCTIVE	—	SEA LEVEL	3 AMP
	—	50,000 FT	2.5 AMP
RESISTIVE	—	SEA LEVEL	5 AMP
	—	50,000 FT	5 AMP
MAXIMUM INRUSH	—	—	24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	± .03
TWO PLACE	(.00)	± .01
THREE PLACE	(.000)	± .001
ANGLES		±

WEIGHT