


HONEYWELL
PART NUMBER


2TL126-70 SERIES CHART 1

REV	DOCUMENT	CHANGED BY	CHECK
B	0038172	SSK 15MAR08	BLR

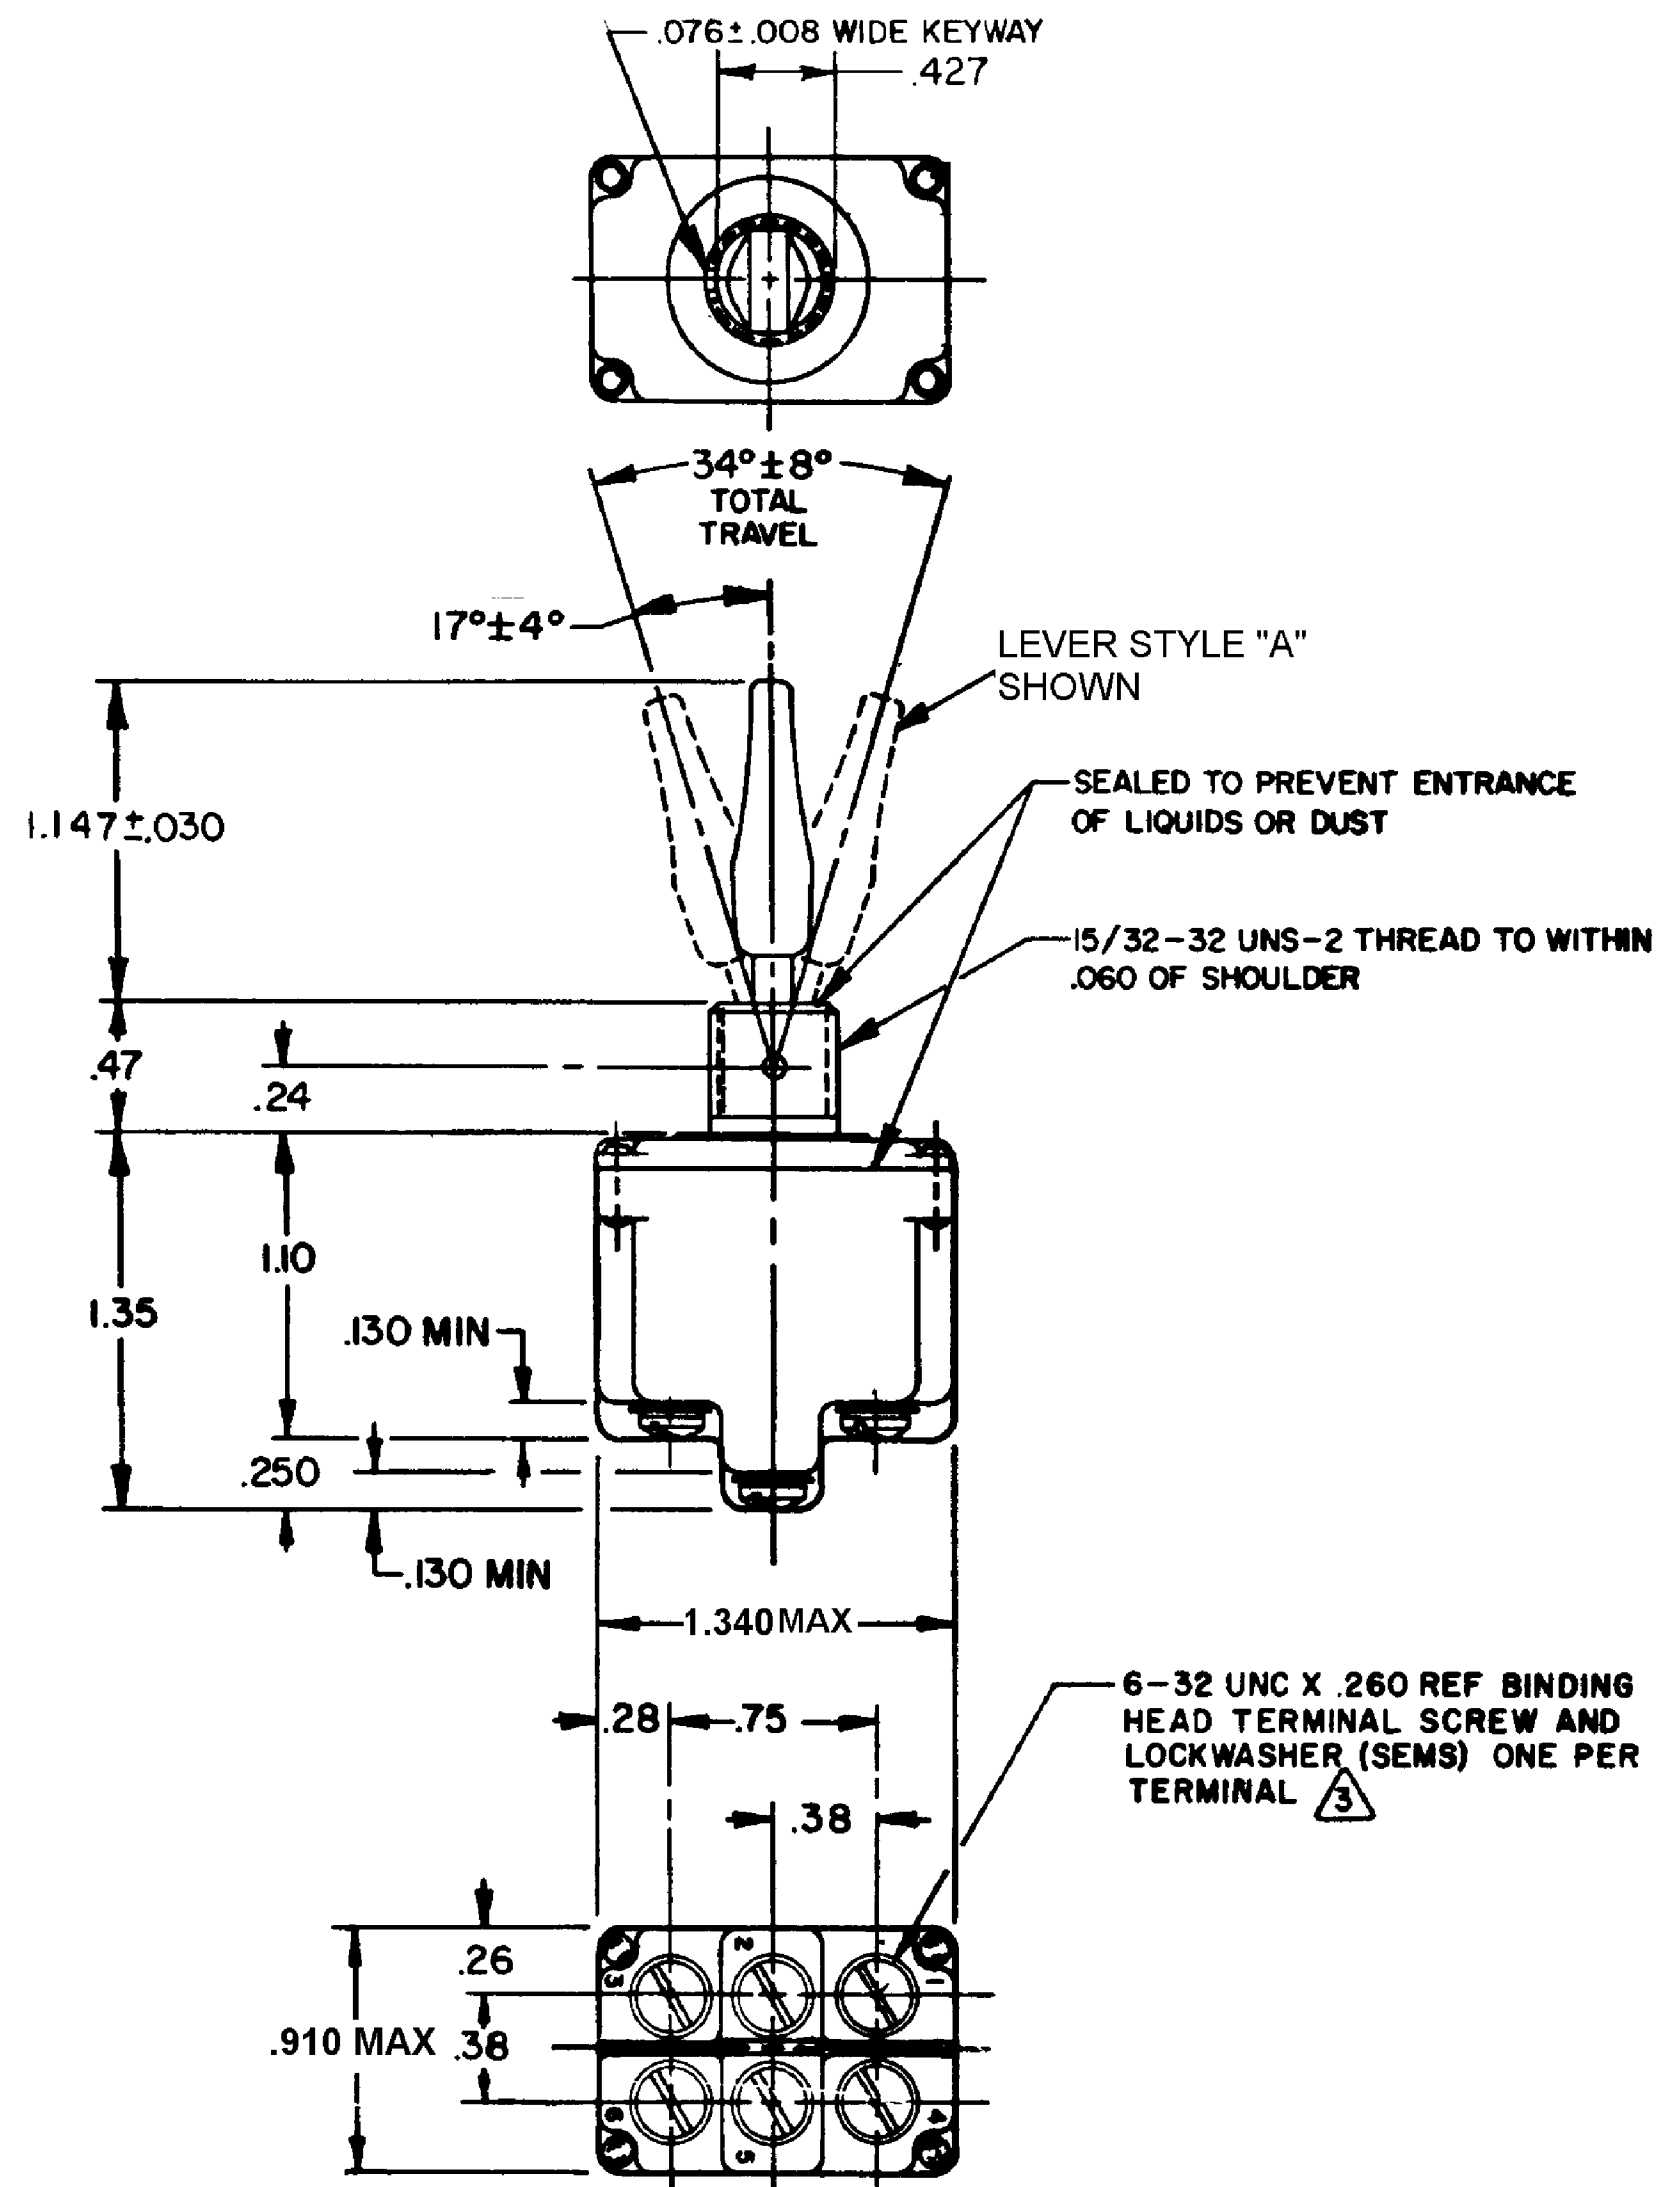

CATALOG LISTING 	CURRENT CAPACITY (AMPS)								
	RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
	DC VOLTS			AC VOLTS					
	28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
2TL126-70	18	.75	.5	11	6	5	2	10	8

CIRCUIT MADE WITH TOGGLE LEVER IN		
KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
MOMENTARY POSITION	MAINTAINED POSITION	MOMENTARY POSITION

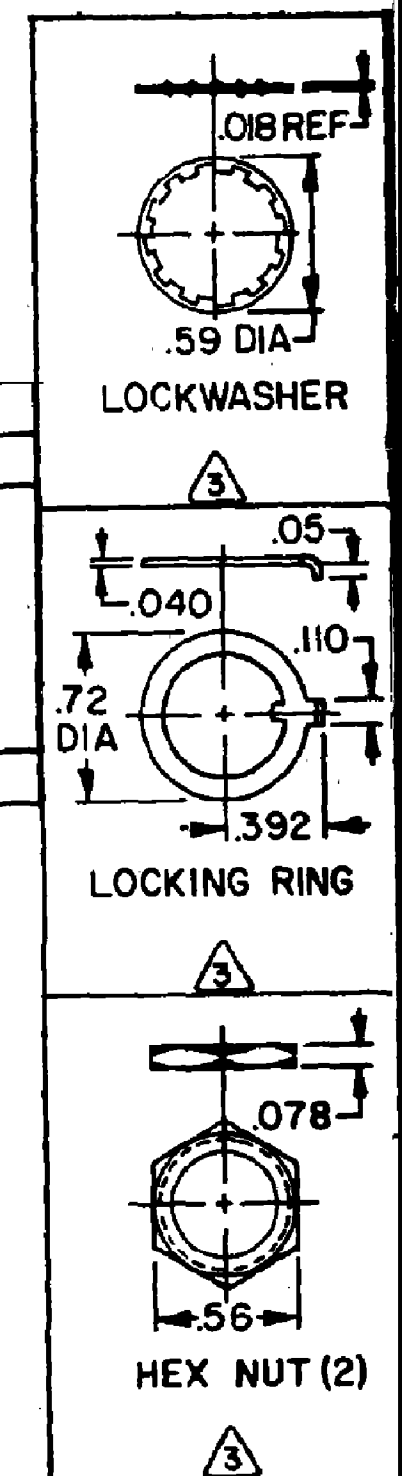

10A-125, 250, 277 VAC
1/4-125 VAC : 1/2HP-250, 277 VAC
3A-125VAC "L" L192



NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- CIRCUIT DESIGNATION, DATE CODE, UL RATING, AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
- SUFFIX MUST BE ADDED FOR DESIRED LEVER STYLE AND COLOR (EXAMPLE: 2TL126-70-A02)

LEVER COLOR CODE 5		LEVER STYLE 5		
COLOR IDENT	COLOR	STYLE A	STYLE B	STYLE C
01	WHITE			
02	BLACK			
03	BLUE			
04	RED			
05	GREEN			
06	ORANGE			
07	GRAY			
08	YELLOW			

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES ± 2	DRAWN	VS	12FEB08	Honeywell					
	CHECK	BLR	12FEB08						
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH-TOGGLE					
	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE C	TYPE I	DRAWING NAME 2TL126-70 SERIES CHART 1			REV B
THIRD ANGLE PROJECTION 				RASTER		SCALE NTS	SHEET 1 OF 1		