

## Honeywell Sensing and Control

Search



## narrow your search

## Products

- Controls Monitoring and Lighting (286)
- Machine Safety (1727)
- Sensors (6165)
- Switches (9781)
- Wireless (45)

## Technology

- Control and Instrumentation (890)
- Electromechanical (9307)
- Magnetic (541)
- Platinum thin film (56)
- Thick Film (1372)
- More...

## new products

## New Wireless Products

Go farther. Work smarter. Explore new possibilities. Just by cutting the cord and making the switch.



Wireless Web Site  
WGLA and WPMM  
XYR6000™

[find out more](#)

## white papers

- Wireless Switches Offer Unlimited Benefit
- Basic Switches Are Not Created Equal
- Applying Precision Switches
- Sensors for Medical Devices
- New Ways to Measure Torque
- Choosing Safety Switches
- Specifying Hour Meters

## Need help?

[Click here to contact us](#)

## 2TL69-7

( Home : Products : Switches » MICRO SWITCH™ Toggle Switches » TL )


Image Not Available

TL Series Toggle Switch, 2 pole, 3 position, Screw terminal, Standard Lever

[Sales & Service](#)[Distributor Inventory](#)[Overview](#) [Specs](#) [Documentation](#) [Application Notes](#)

## Product Specifications

Circuitry/Operating action

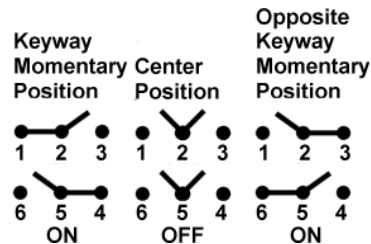

|                                       |                                                                                                              |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Product Type                          | MICRO SWITCH™ Toggle Switch                                                                                  |
| Ampere/Voltage Range (Resistive Load) | 0.75 A at 115 Vdc, 0.5 A to 18 A at 0.5 Vdc to 28 Vdc, 0.5 A to 10 A at 0.5 Vac to 277 Vac, 0.5 A at 250 Vdc |
| Circuitry                             | DPDT                                                                                                         |
| Action                                | 3 position                                                                                                   |
| Mounting                              | Bushing 15/32 in                                                                                             |
| Termination                           | Screw                                                                                                        |
| Lever Type                            | Standard                                                                                                     |
| UL/CSA                                | L192: 10 A-125, 250, 277 Vac; 1/4 Hp-125 Vac; 1/2 Hp-250, 277 Vac; 3 A-125 Vac "L"                           |
| Comment                               | Silver cadmium oxide contacts                                                                                |
| Availability                          | Global                                                                                                       |
| UNSPSC Code                           | 30211908                                                                                                     |
| UNSPSC Commodity                      | 30211908 Toggle switches                                                                                     |
| Series Name                           | TL                                                                                                           |

## contacts

Customer Service  
Technical Support  
Global Sales & Service  
View Site Demo  
Site Comments?

## meet dr. larry

VIDEO - Dr. Larry Goldstein explains our newest and best technologies.

Meet Dr. Larry



## my links

Login to iCOM  
Login to Rep/AD Portal  
Login to Digital University

## News Center

Honeywell Introduces TruStability® NSC Series, Uncompensated / Unamplified Board Mount Pressure Sensors

HONEYWELL EXPANDS ITS LIMITLESS™ PLATFORM WITH THE LAUNCH OF ITS GLOBALLY AVAILABLE INDUSTRIAL WIRELESS RECEIVER

HONEYWELL EXTENDS ITS TRUSTABILITY® PRESSURE SENSOR PRODUCT LINE WITH A SINGLE SIDE LIQUID MEDIA OPTION

HONEYWELL ADDS NEW 100° AND 180° ARC CONFIGURATIONS TO ITS SMART POSITION SENSOR PORTFOLIO

HONEYWELL INTRODUCES ITS HAWK™ RESOLVERS 1-INCH SERIES, FULLY HOUSED CONFIGURATION

HONEYWELL INTRODUCES MICROPOWER OMNIPOLAR DIGITAL HALL-EFFECT SENSOR ICS WITH LOW SUPPLY VOLTAGE AND ULTRA LOW TYPICAL CURRENT

**MICRO SWITCH**  
Anniversary site