

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929




SWITCH - TOGGLE

CATALOG LISTING

31NT891 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 			ELECTRICAL DATA
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	
31NT891-1	ON	OFF	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"  
31NT891-2	OFF	NONE	ON	
31NT891-3	ON	NONE	ON	
31NT891-21	NONE	OFF	ON	
31NT891-31	NONE	ON	ON	
31NT891-4	MOM OFF	NONE	ON	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"  
31NT891-5	MOM ON	OFF	ON	
31NT891-6	MOM ON	NONE	OFF	
31NT891-7	MOM ON	OFF	MOM ON	
31NT891-8	MOM ON	NONE	ON	
31NT891-51	NONE	ON	MOM ON	
31NT891-61	MOM ON	OFF	NONE	

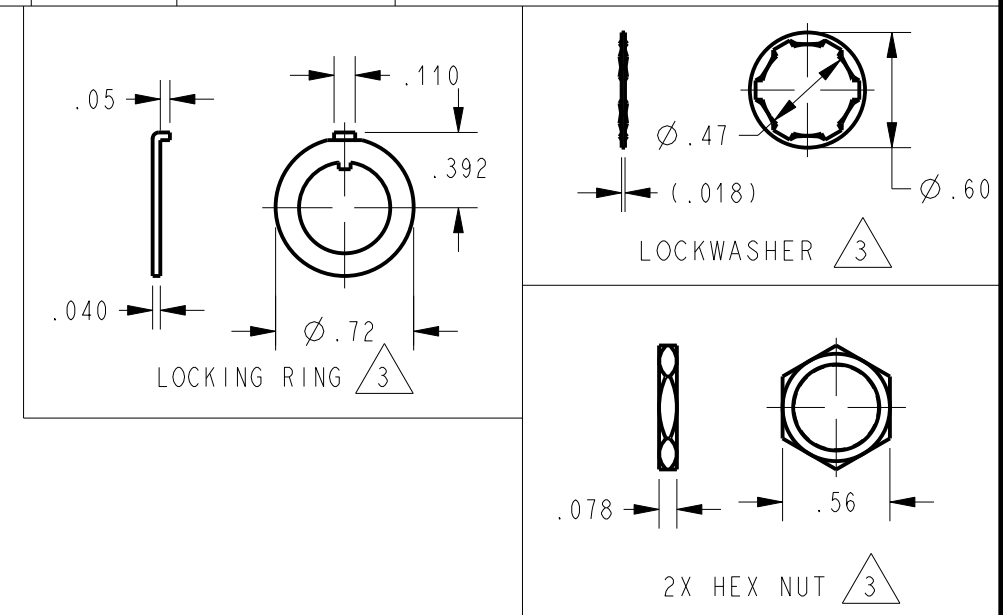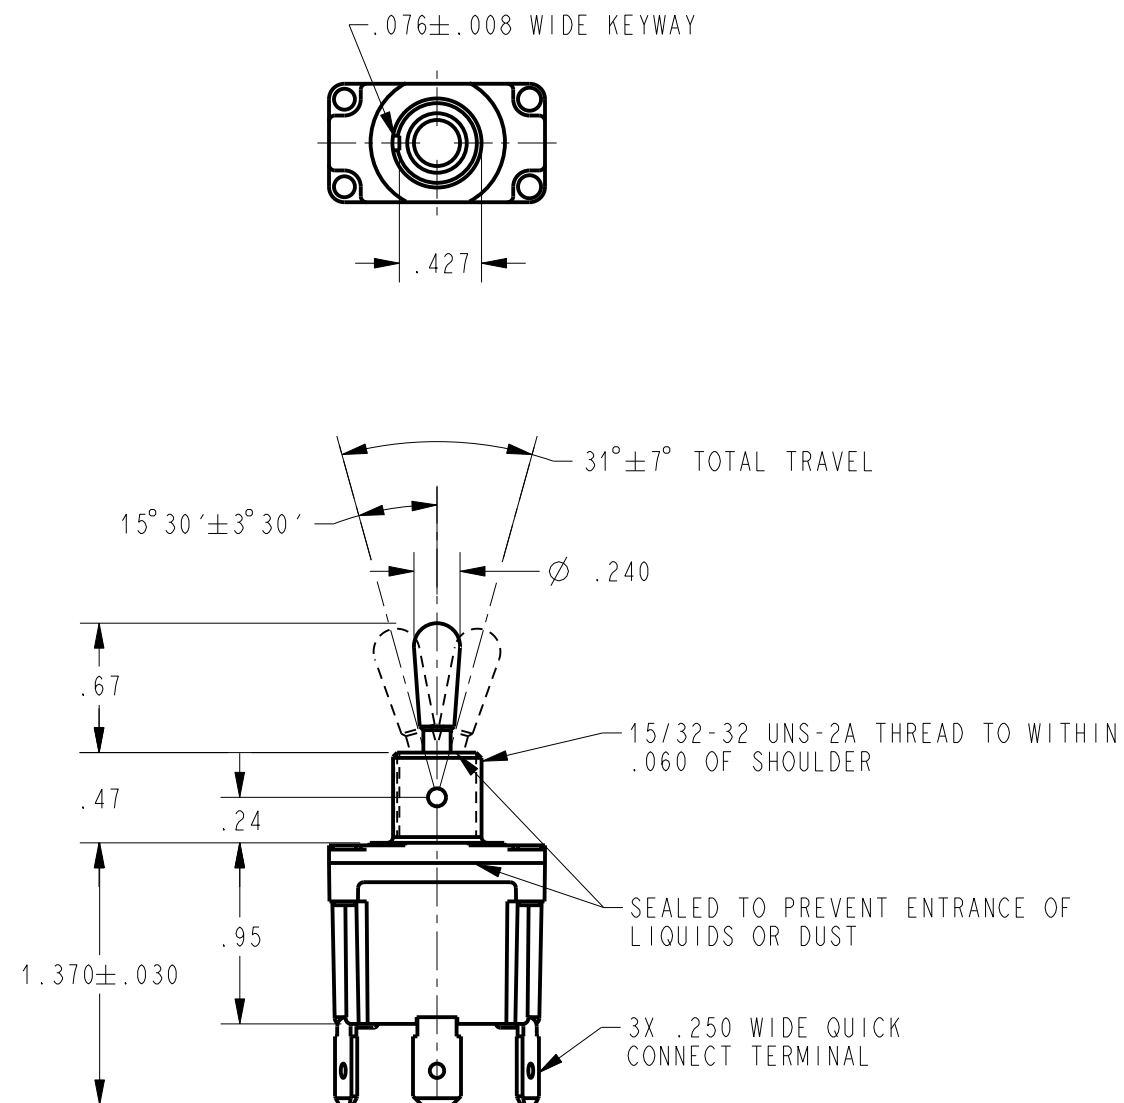

NOTES

- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F
CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
FURNISHED UNASSEMBLED
- 3 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- 4 - TO ORDER WITHOUT HARDWARE ADD (-NH) SUFFIX TO
CATALOG LISTING
- 5 - GOLD PLATED CONTACTS

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION	
	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.07 LB APPROX