

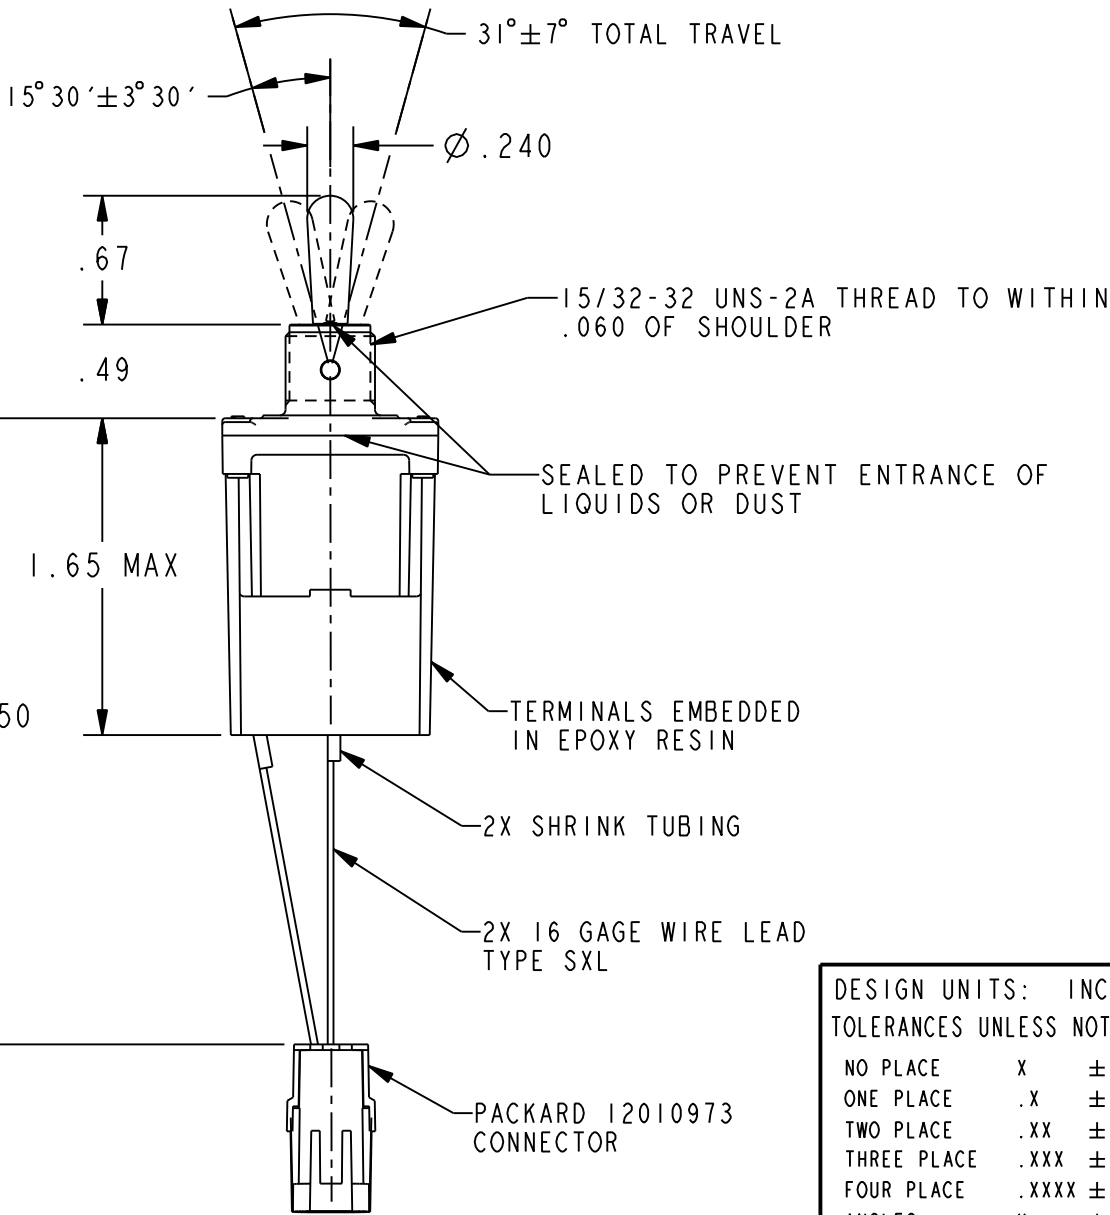


HONEYWELL
PART NUMBER
31NT91-206-PL01

REV	DOCUMENT	CHANGED BY	CHECK
A	0012208	NM 04APR05	AK

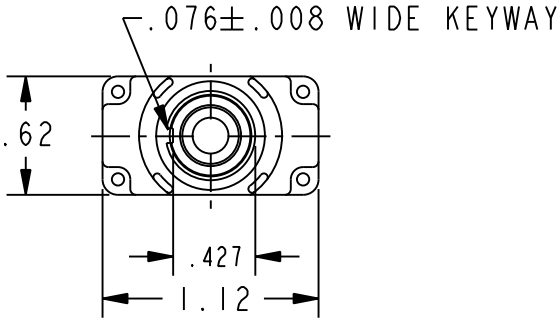

CIRCUIT MADE WITH TOGGLE LEVER IN			ELECTRICAL DATA
KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	
OFF	NONE	MOM ON	
			LI92 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"

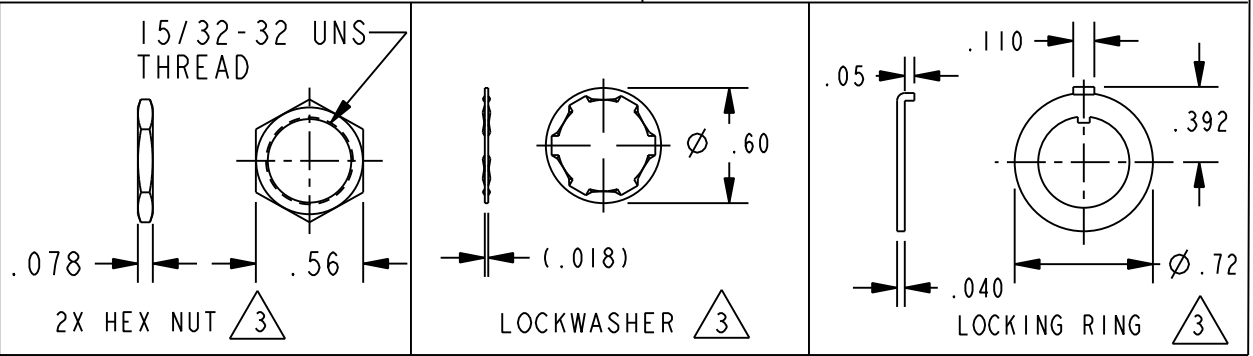

- NOTES
- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160 °F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - HONEYWELL CAT. LIST. MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES X ± THIRD ANGLE PROJECTION 			DRAWN			NM			04APR05			Honeywell						
			CHECK			AK			04APR05									
			.030 .015 .005 0			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.						TITLE						
						INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						SIZE	TYPE		DRAWING NAME			
			Pro/ENGINEER 2D						B	I		31NT91-206-PL01				A		
									SCALE		-				SHEET		1 OF 1	