


REV	DOCUMENT	CHANGED BY	CHECK
A	0006458	KSR 09 JUL 04	AK

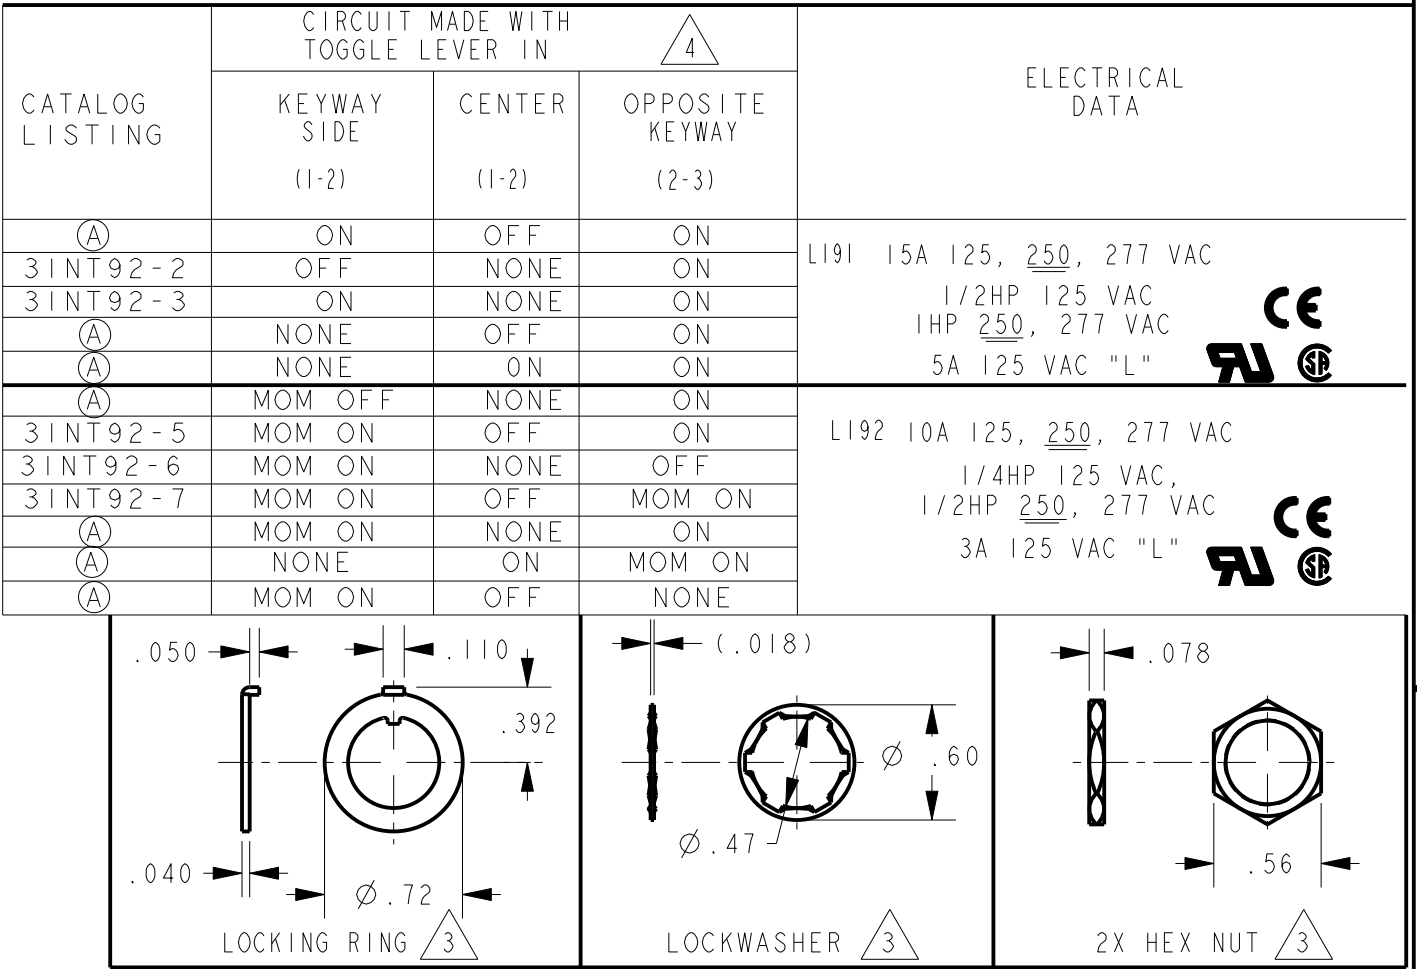

- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.400 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES X ± 3	DRAWN	KSR	09JUL04	Honeywell			
	CHECK	AK	09JUL04				
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH-TOGGLE			
	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						
	THIRD ANGLE PROJECTION 			SIZE	TYPE	DRAWING NAME	
			B	I	3INT92 SERIES CHART I		A
Pro/ENGINEER 2D			SCALE	FULL	WEIGHT .07 LB APPROX		SHEET 1 OF 1