


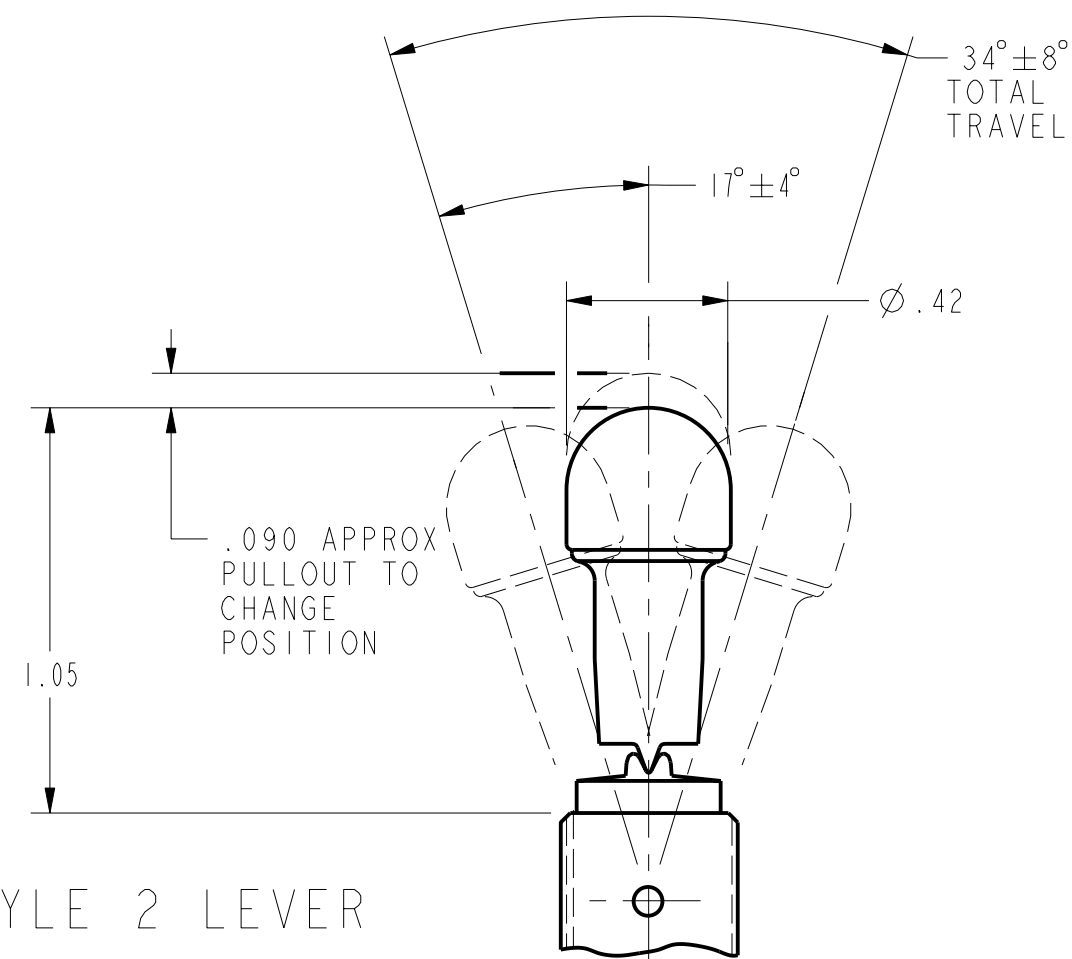

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH FURNISHED UNASSEMBLED
- 3 - KEYWAY SHOWN ON LEFT SIDE
- 4 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING, SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 5 -

THIRD ANGLE PROJECTION	
	
SCALE	2:1
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) +.0
TWO PLACE	(.00) +.00
THREE PLACE	(.000) +.000
ANGLES	+ .
WEIGHT	.12 LBS APPROX