

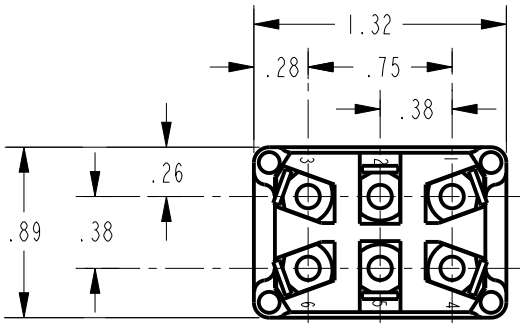
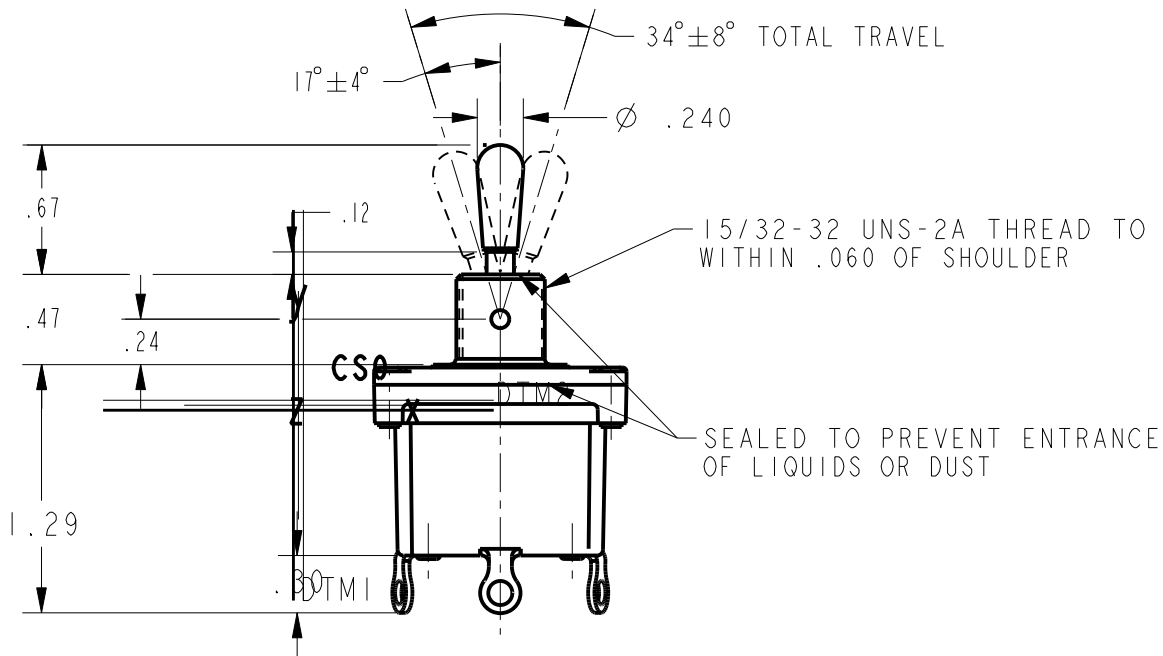
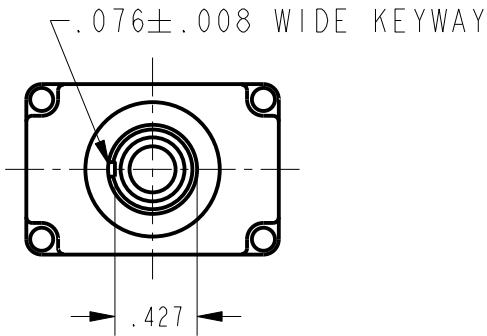
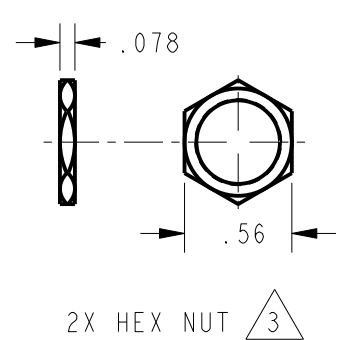


HONEYWELL
PART NUMBER
32NT92 SERIES CHART I

REV	DOCUMENT	CHANGED BY	CHECK
A	0006458	KSR 09JUL04	AK

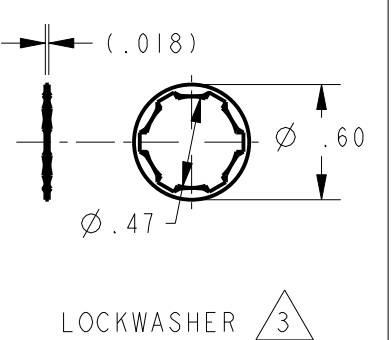

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 			ELECTRICAL DATA
	KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)	
32NT92-1	ON	OFF	ON	LI91 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"  
32NT92-2	OFF	NONE	ON	
32NT92-3	ON	NONE	ON	
 (A)	NONE	OFF	ON	LI92 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"  
 (A)	NONE	ON	ON	
 (A)	MOM OFF	NONE	ON	
 (A)	MOM ON	OFF	ON	
 (A)	MOM ON	NONE	OFF	
32NT92-7	MOM ON	OFF	MOM ON	
 (A)	MOM ON	NONE	ON	
 (A)	NONE	ON	MOM ON	
 (A)	MOM ON	OFF	NONE	
 (A)	MOM ON	OFF	NONE	

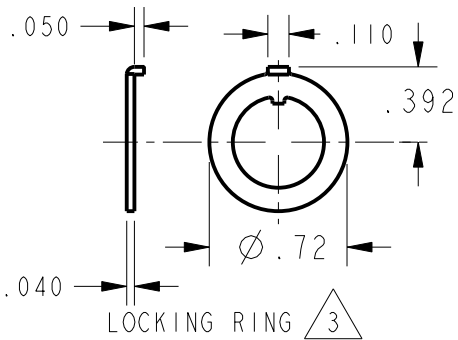

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
 FURNISHED UNASSEMBLED
 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.400 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES X ± 3 THIRD ANGLE PROJECTION 	DRAWN	KSR	09JUL04	Honeywell			
	CHECK	AK	09JUL04				
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH-TOGGLE			
	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 32NT92 SERIES CHART I	REV A
	Pro/ENGINEER 2D			SCALE FULL	WEIGHT .15 LBS APPROX	SHEET 1 OF 1	