



FREEDPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. REG. CODE 91525

41EN96-6
CATALOG LISTING



CATALOG LISTING

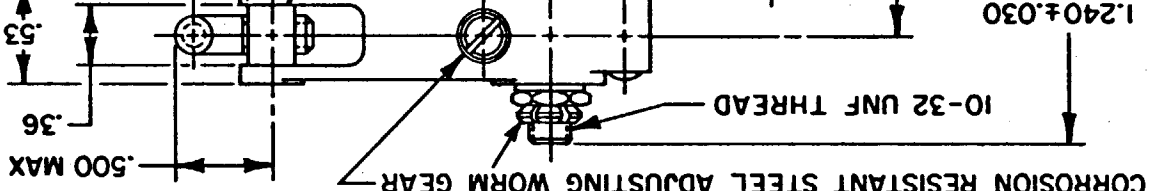

(6) NO. 20 WIRE LEAD
MARKED WITH CIRC
WIRE GAGE (1-20,
PER MIL-W-5088

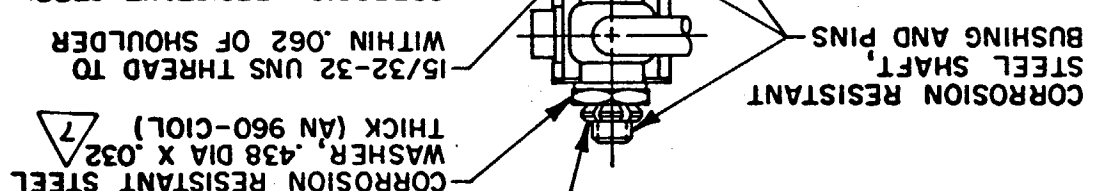


-CORROSION RESISTANT STEEL HEX NUT, .62 ACROSS FLATS X .125 THICK
-CORROSION RESISTANT STEEL INTERNAL TO LOCKWASHER, .60 DIA X .018 REF THICK (MS
-.140 DIA X .062 HIGH PINS (2) LOCATED ON .765 DIA CENTERS

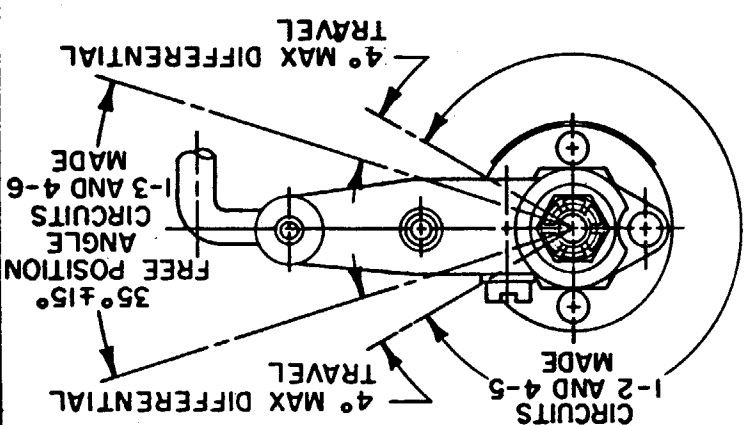

LEVER MAY BE ADJUSTED FOR
AN INFINITE NUMBER OF POSITIONS
THRU 360° ADJUSTMENT IS MADE BY
LOOSENING THE LOCK NUT AND THEN
THE LOCKSCREW AND TURNING GEAR
UNTIL LEVER IS IN DESIRED POSITION
LOCKSCREW AND LOCK NUT ON SHAFT
IS THEN TIGHTENED TO POSITIVELY
LOCK LEVER IN POSITION.
LEVER ADJUSTMENT DETAIL
SCALE 2 TO 1

7	MI-S-8805 HARDWARE MAY BE PACKAGED UNASSEMBLED PER PINS WITHIN 5°
6	LEADS PARALLEL WITH CENTERLINE OF MOUNTING OF TORQUE WHEN TIGHTENING LOCKING NUT
5	DO NOT APPLY MORE THAN 20-25 INCH-POUNDS OF TORQUE WHEN TIGHTENING LOCKING NUT
4	THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF THE SHAFT UNIT PROVIDES NO SHAFT RESTORING FORCE
3	NAMEPLATE CIRCUIT DIAGRAM AND CAT. LIST. ARE SHOWN ON
2	SWITCH SEALED PER MIL-S-8805 SYMBOL 4
1	CORROSION RESISTANT STEEL ENCLOSURE

		THIRD ANGLE PROJECTION	
SCALE FULL			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE		(.0)	± .030
TWO PLACE		(.00)	± .015
THREE PLACE		(.000)	± .005
ANGLES		±	
RAW MATERIAL - COMMERCIAL STANDARD			
DIMENSIONS ARE IN INCHES AND ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			
MICRO SWITCH STANDARDS APPLY			
WEIGHT 8 9 OZ MAX			

ELECTRICAL DATA		CONTACT ARRANGEMENT	
S P D T (2)			
AND IS THE PROPERTY OF MICRO SWITCH.			

CHARACTERISTICS	OPERATING TORQUE — — — 3 IN LB MAX
-----------------	------------------------------------

PRETRAVEL
DIFFERENTIAL TRAVEL
OVERTRAVEL

SEE DETAIL

[illegible]