
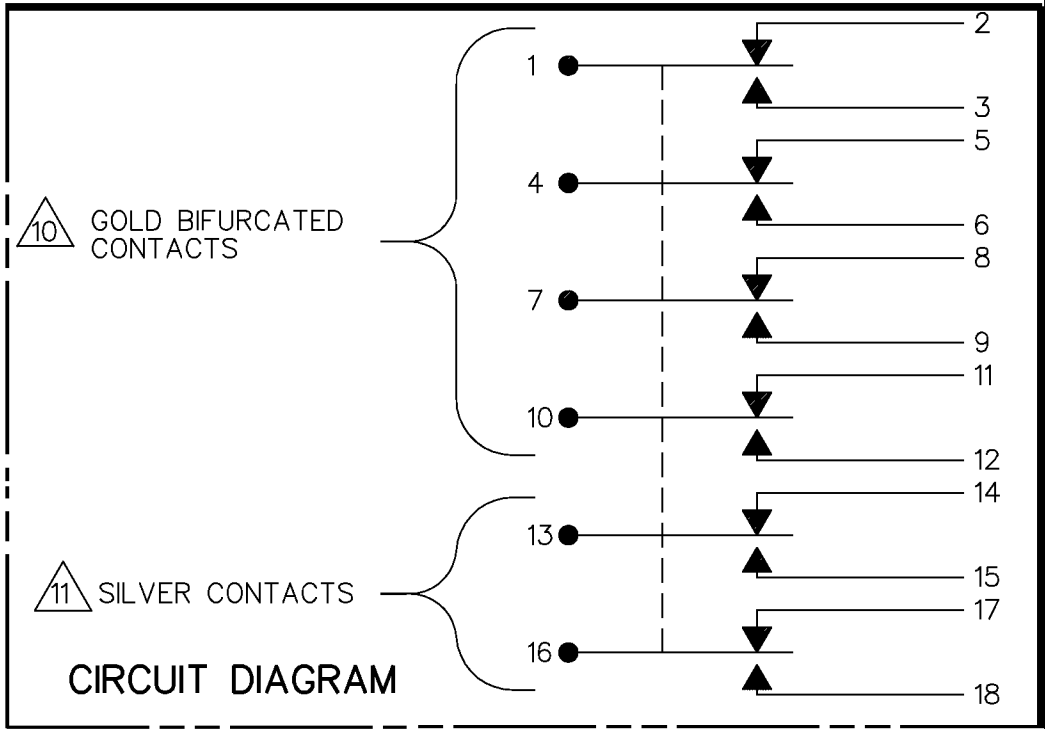
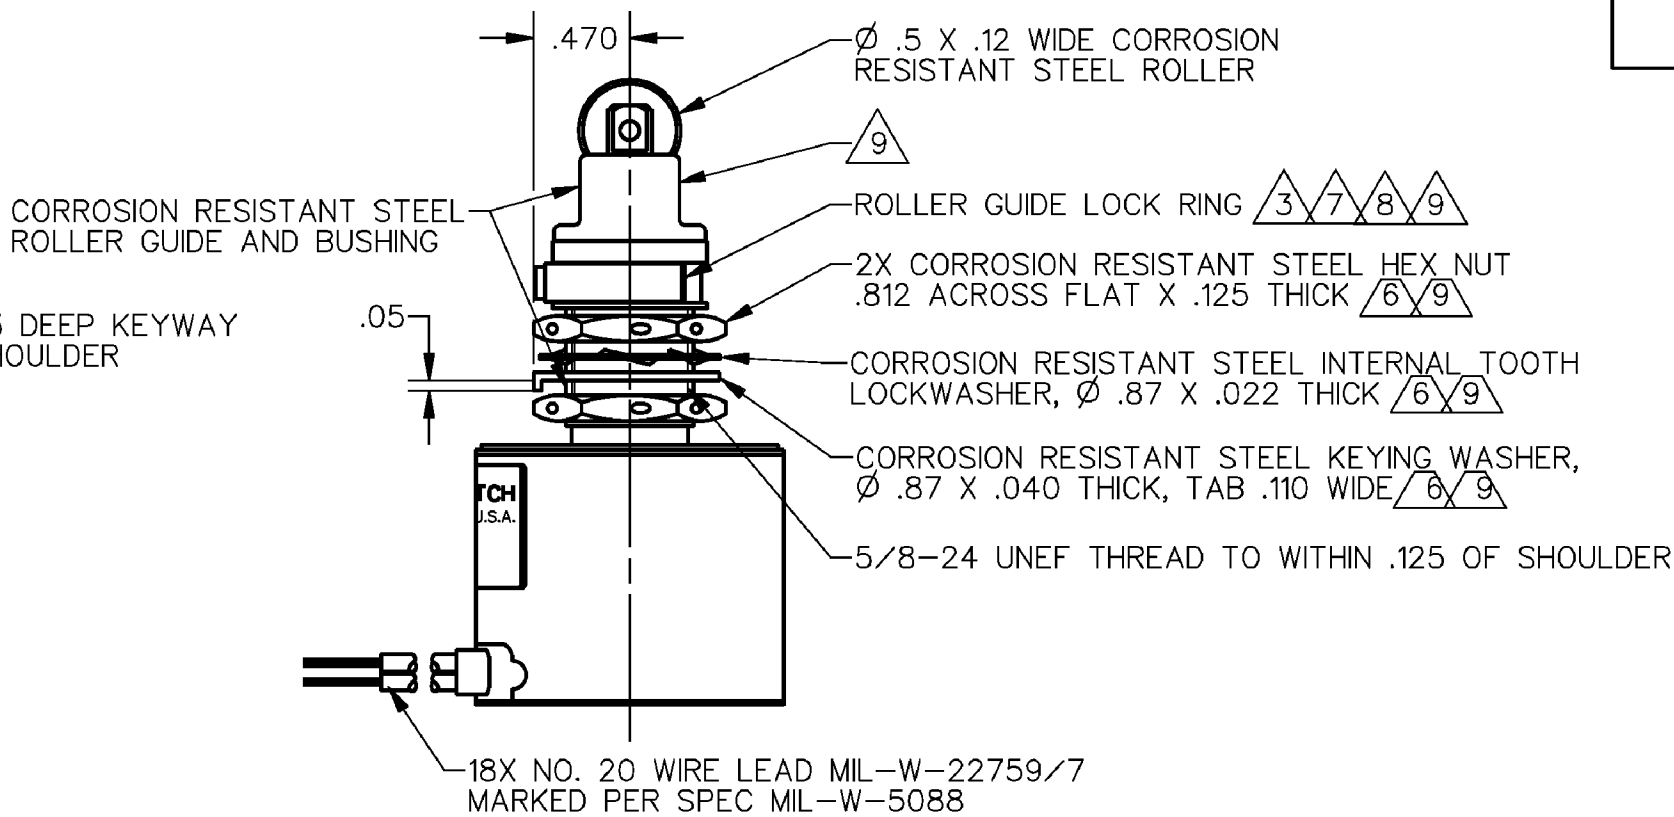
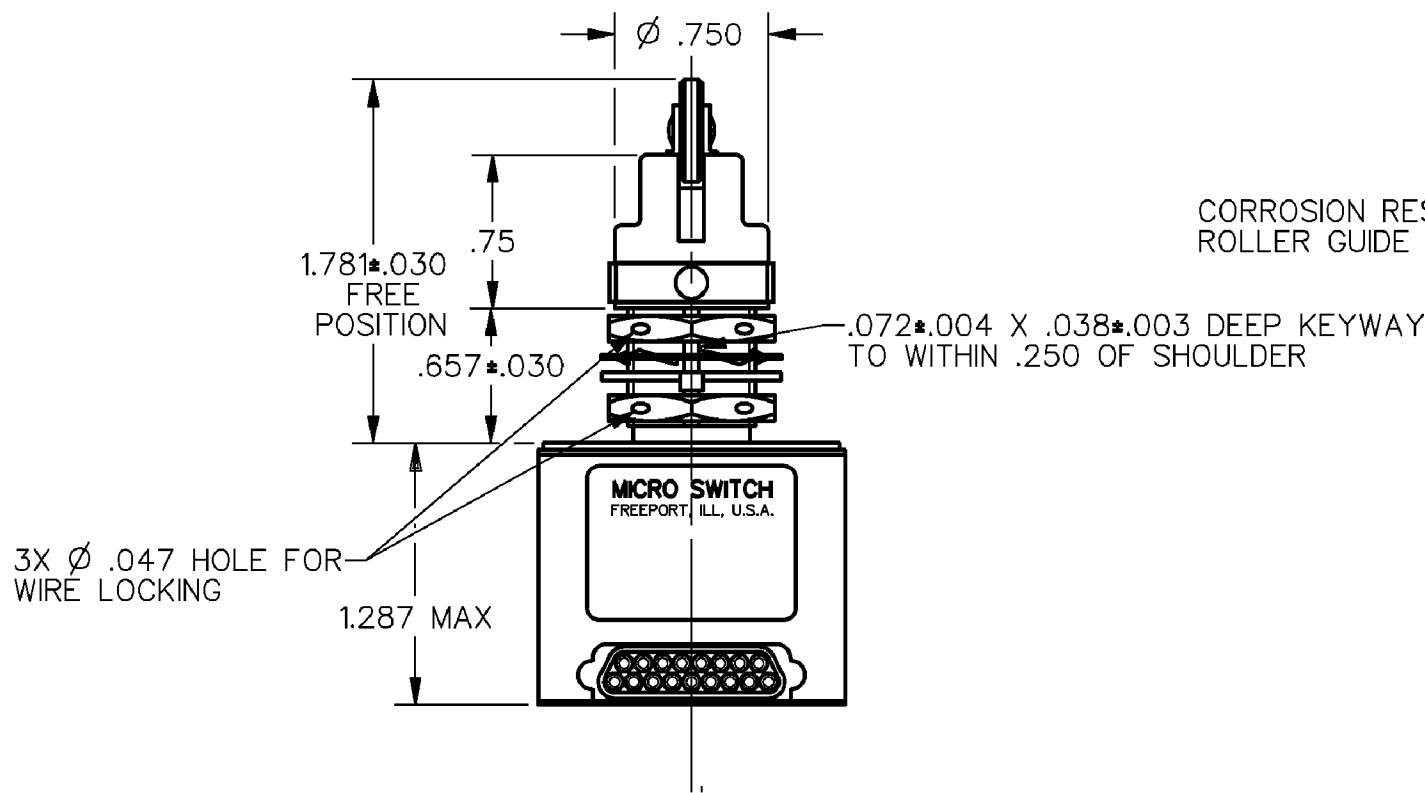



HONEYWELL
PART NUMBER
426EN10-8
FAA-PMA 

REV	DOCUMENT	CHANGED BY	CHECK
5	0006596	KSR 15JUL04	AK

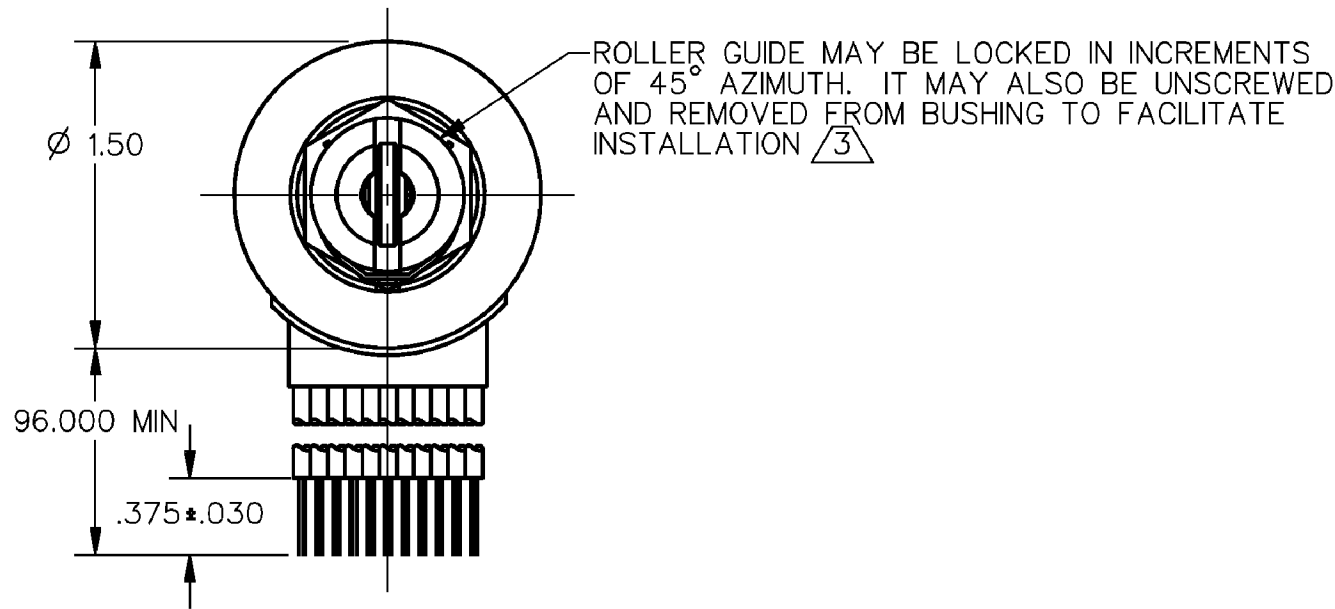

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 -  TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING GUIDE LOCK RING
 - 4 - COINCIDENCE OF OPERATION AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 5 - CIRCUIT DIAGRAM, CATALOG LISTING, FED MFG CODE, DATE CODE AND FAA-PMA ARE SHOWN ON NAMEPLATE
 -  REPLACEMENT MOUNTING HARDWARE: PACKET 19PA8
 -  REPLACEMENT ROLLER GUIDE AND LOCKRING PACKET 15PA104
 -  REPLACEMENT LOCKRING: PACKET 15PA137
 -  HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
 -  RATING APPLIES TO CIRCUITS 1-12
 -  RATING APPLIES TO CURCUIITS 13-18
 -  FOR MANUFACTURING DETAIL SEE ASSEMBLY DRAWING 426EN10-8 FOR FAA-PMA

CHARACTERISTICS	ELECTRICAL DATA			
OPERATING FORCE — — — — 6-12 LB FULL OVERTRAVEL FORCE ---30 LB MAX RELEASE FORCE — — — — 4 LB MIN PRETRAVEL — — — — .040 MAX DIFFERENTIAL TRAVEL — — .030 MAX OVERTRAVEL — — — — .250 MIN	CONTACT ARRANGEMENT 6X S P D T			
	LOAD	28 VDC		
		SEA LEVEL	50,000 FT.	
				
	RES	1	7	1
	IND	.5	4	.5
MOTOR			4	2.5

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES ± 2	DRAWN	KSR	15JUL04	Honeywell			
	CHECK	AK	15JUL04				
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - ENCLOSED			
	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE C	TYPE I	DRAWING NAME 426EN10-8	REV 5
THIRD ANGLE PROJECTION 	RASTER			SCALE FULL	WEIGHT 32 OZ MAX	SHEET 1 OF 1	