

Honeywell Sensing and Control

Search



4TL62-7

(Home : Products : Switches » MICRO SWITCH™ Toggle Switches » TL)

[contacts](#)


narrow your search

Products

- Controls Monitoring and Lighting (286)
- Machine Safety (1727)
- Sensors (6158)
- Switches (9781)
- Wireless (45)

Technology

- Control and Instrumentation (890)
- Electromechanical (9303)
- Magnetic (538)
- Platinum thin film (56)
- Thick Film (1372)
- More...

**TL Series Toggle Switch, 4 pole, 3 position, Screw terminal, Special Design Lever**

Actual product appearance may vary.

[Sales & Service](#)[Distributor Inventory](#)

Customer Service
Technical Support
Global Sales & Service
View Site Demo
Site Comments?

[meet dr. larry](#)

VIDEO - Dr. Larry Goldstein explains our newest and best technologies.

Meet Dr. Larry

[my links](#)

[Login to iCOM](#)
[Login to Rep/AD Portal](#)
[Login to Digital University](#)

[News Center](#)

HONEYWELL INTRODUCES TRUSTABILITY® NSC SERIES, UNCOMPENSATED / UNAMPLIFIED BOARD MOUNT PRESSURE SENSORS

HONEYWELL EXPANDS ITS LIMITLESS™ PLATFORM WITH THE LAUNCH OF ITS GLOBALLY AVAILABLE INDUSTRIAL WIRELESS RECEIVER

HONEYWELL EXTENDS ITS TRUSTABILITY® PRESSURE SENSOR PRODUCT LINE WITH A SINGLE SIDE LIQUID MEDIA OPTION

MICRO SWITCH
Anniversary site

[new products](#)[New Wireless Products](#)

Go farther. Work smarter. Explore new possibilities. Just by cutting the cord and making the switch.



Wireless Web Site
WGLA and WPMM
XYR6000™


[find out more](#)[white papers](#)

Wireless Switches Offer Unlimited Benefit
Basic Switches Are Not Created Equal
Applying Precision Switches
Sensors for Medical Devices
New Ways to Measure Torque
Choosing Safety Switches
Specifying Hour Meters

[Need help?](#)[Click here to contact us](#)[Overview](#) [Specs](#) [Documentation](#) [Application Notes](#)

Product Specifications

Circuitry/Operating action

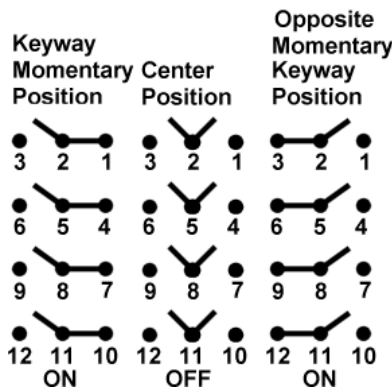

Product Type	MICRO SWITCH™ Toggle Switch
Ampere/Voltage Range (Resistive Load)	0.5 A at 250 Vdc, 0.75 A at 115 Vdc, 0.5 A to 10 A at 0.5 Vac to 277 Vac, 0.5 A to 18 A at 0.5 Vdc to 28 Vdc
Circuitry	4PDT
Action	3 position
Mounting	Bushing 15/32 in
Termination	Screw
Lever Type	Special Design
Comment	Silver cadmium oxide contacts
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	TL