

CATALOG LISTING

602EN611-RB

PAGE 1 OF 1

RELEASE NO. PR-21142-T

REPLACES -

ISSUE 3

CHECK

REVISIONS

A 207221

TSM 16 JAN03

CHECK

16 JAN03

SAV




CHECK


16 JAN03

TSM

PTC/CAD 2D

DRAWN

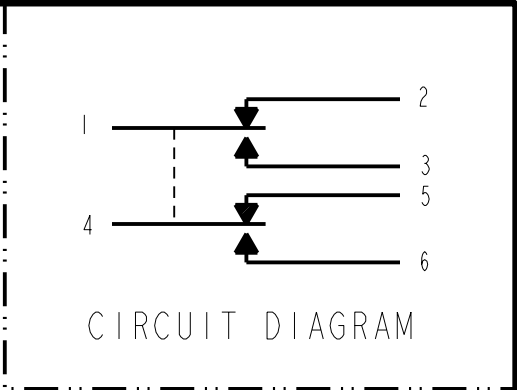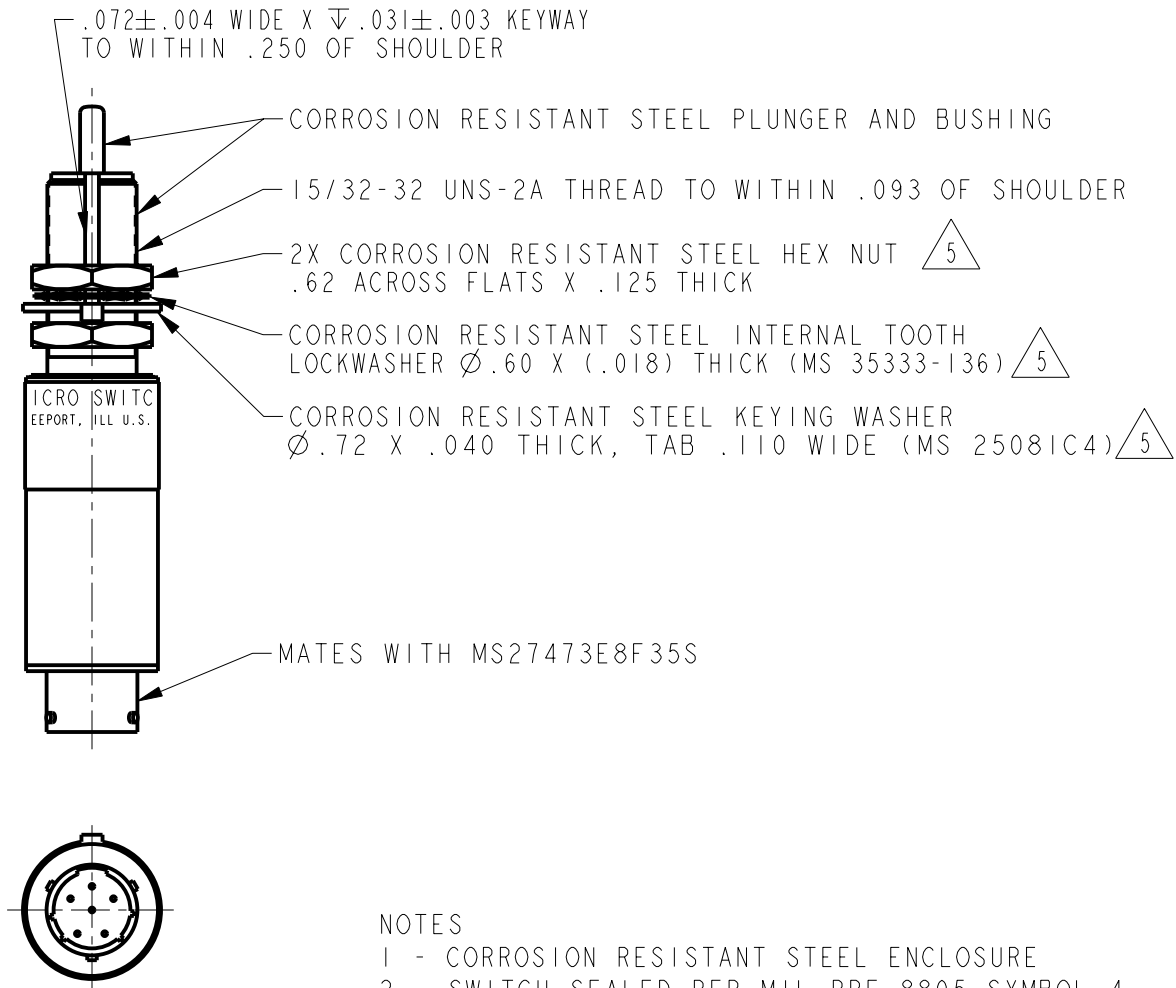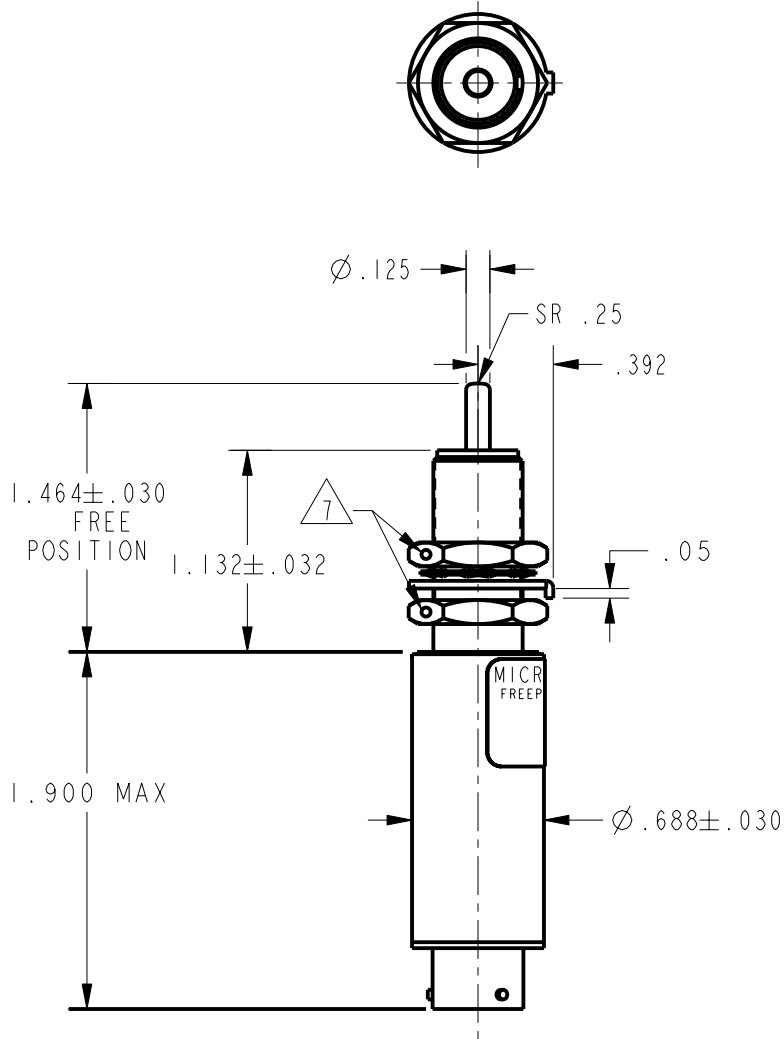

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA		
OPERATING FORCE ----- 2-4 LB		 CONTACT ARRANGEMENT 2X S P D T		
FULL OVERTRAVEL FORCE ----- 15 LB MAX				
RELEASE FORCE ----- 1 LB MIN		28 VDC		
PRETRAVEL ----- .040 MAX				
DIFFERENTIAL TRAVEL ----- .020 MAX		LOAD		
OVERTRAVEL ----- .250 MIN				
		SEA LEVEL		
		50,000 FT		
		RES		
		IND		

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON LABEL
 - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - $\triangle 5$ HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - $\triangle 6$ GOLD BIFURCATED CONTACTS
 - $\triangle 7$ $\varnothing .047$ HOLE FOR WIRE LOCKING

ANSI Y14.5M-1982 APPLIES