

CATALOG LISTING

602HE6-6

PAGE 1 OF 1

RELEASE NO. PR-21147

REPLACES

DDM/CAD

DRAWN

MAM 3 JUN 94

CHECK

REVISIONS

A PR-21147

MAM 3 JUN 94

B CO80132

JAK 1 MAR 95




C CO93183

JAS 12 JUN 98

ISSUE

4

CHECK

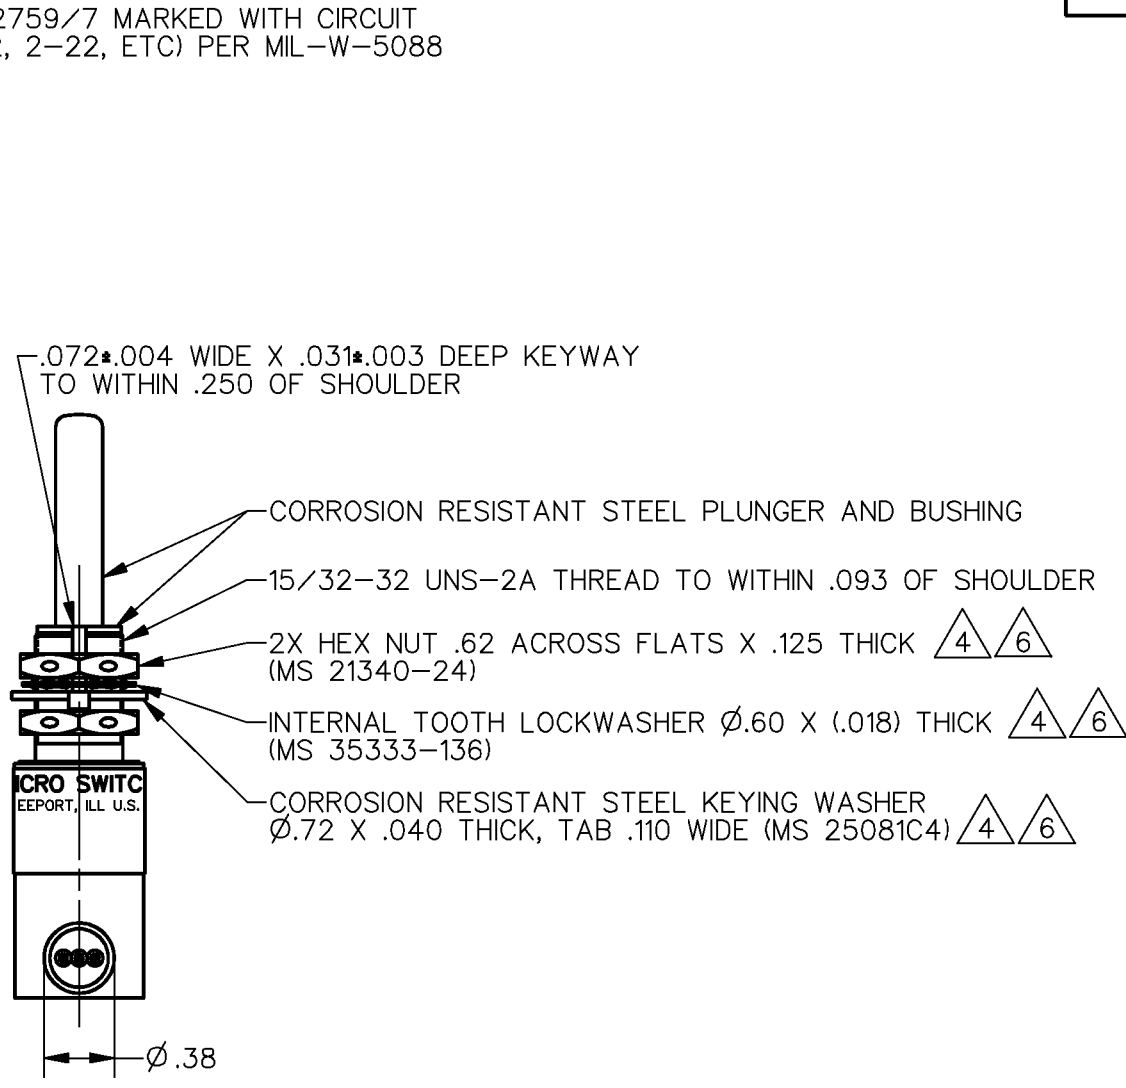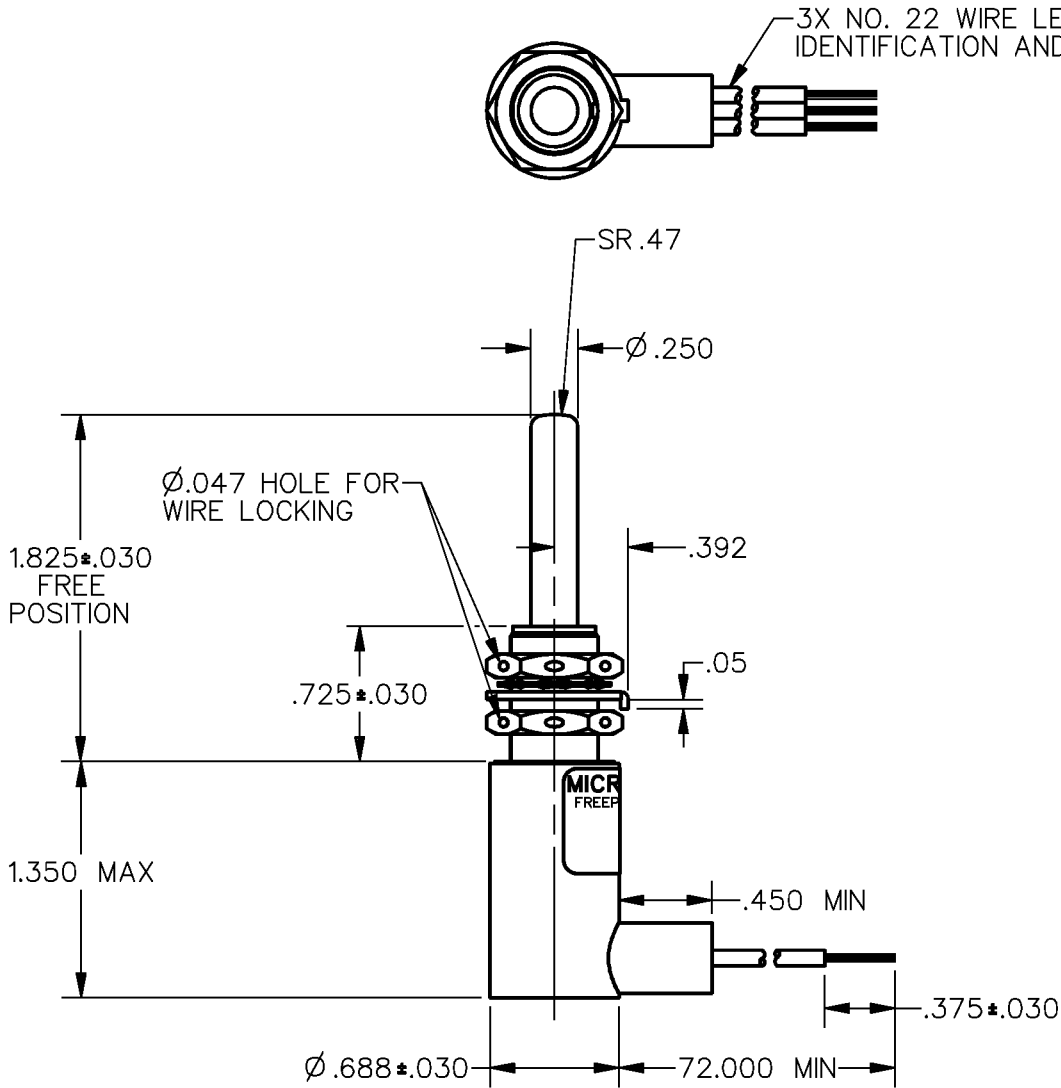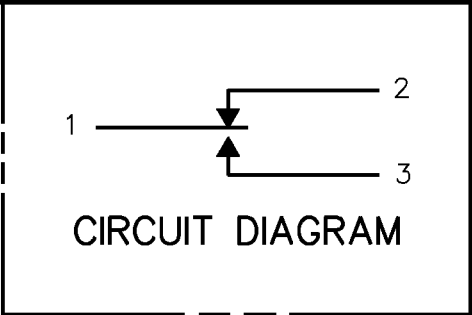

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION	
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE ——— 5 —12 LB		CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE --- 30 LB MAX		S P D T	
RELEASE FORCE ——— 3 LB MIN		28 VDC	
PRETRAVEL ——— .040 MAX		SEA LEVEL & 50,000 FT.	
DIFFERENTIAL TRAVEL ——— .020 MAX		LOAD	
OVERTRAVEL ——— .125 MIN		RES	1
		IND	.5
		MOTOR	
		WEIGHT	

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 5
 - 3 - CIRCUIT DIAGRAM, AND CATALOG LISTING SHOWN ON NAMEPLATE
 - 4 - REPLACEMENT MOUNTING HARDWARE - PACKET 19PA9
 - 5 - FOR OPERATION IN TEMPERATURE OF MINUS 65°F TO PLUS 257°F
 - 6 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805