

CATALOG LISTING
624HE5-RB
PAGE 1 OF 1

ISSUE
1

DDM/CAD
DRAWN

DCS
25 FEB 99

CHECK
JAF

25 FEB 99

CHECK

REVISIONS




CHECK

25 FEB 99

CHECK

RELEASE NO. PR-23756

REPLACES

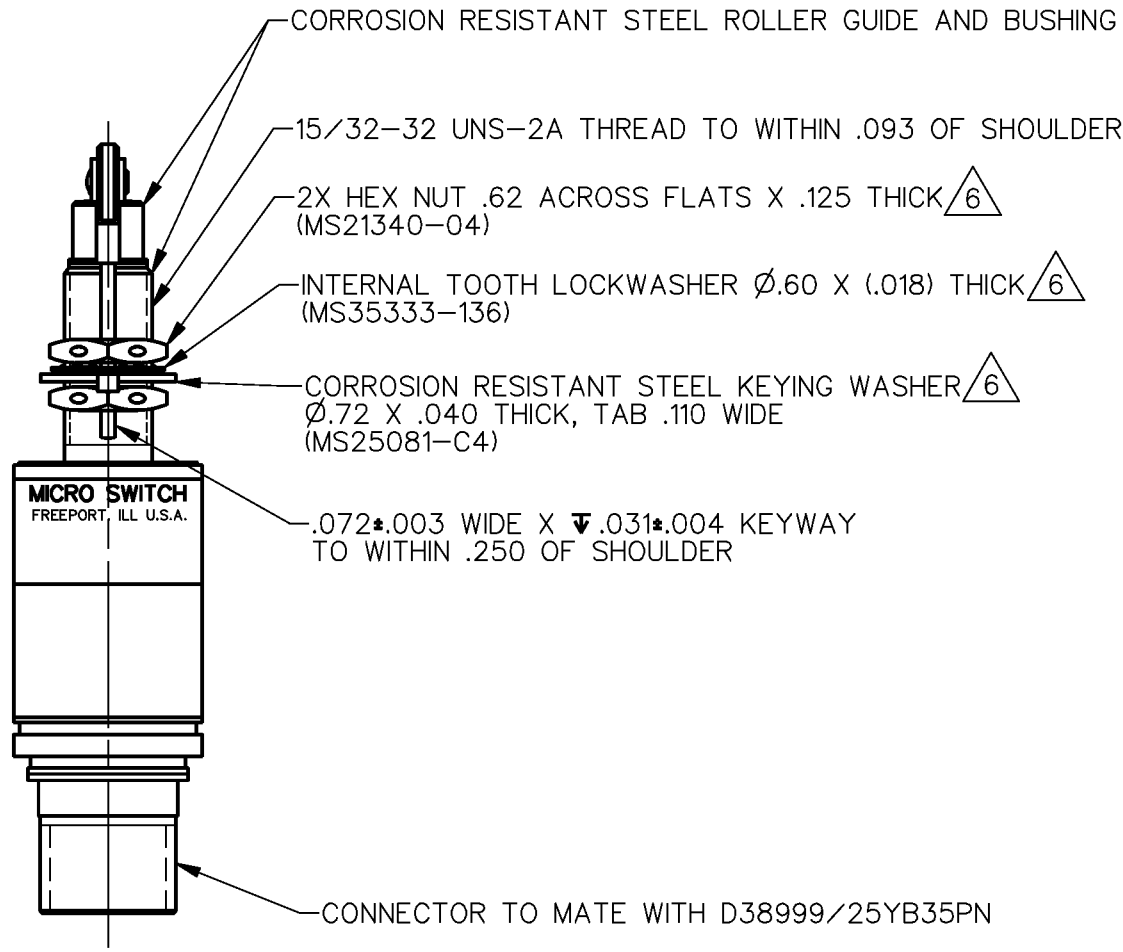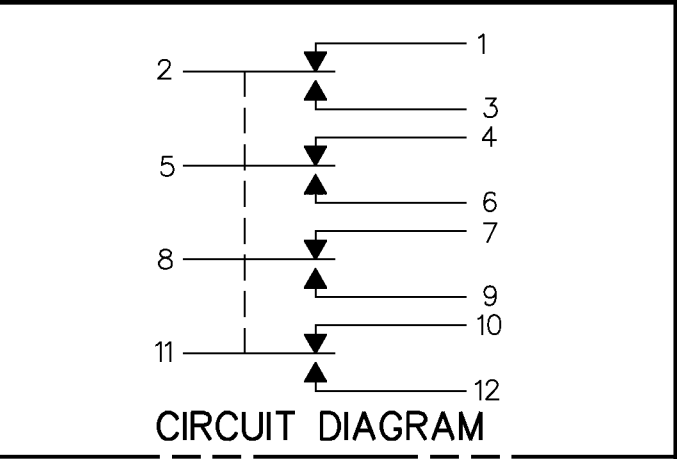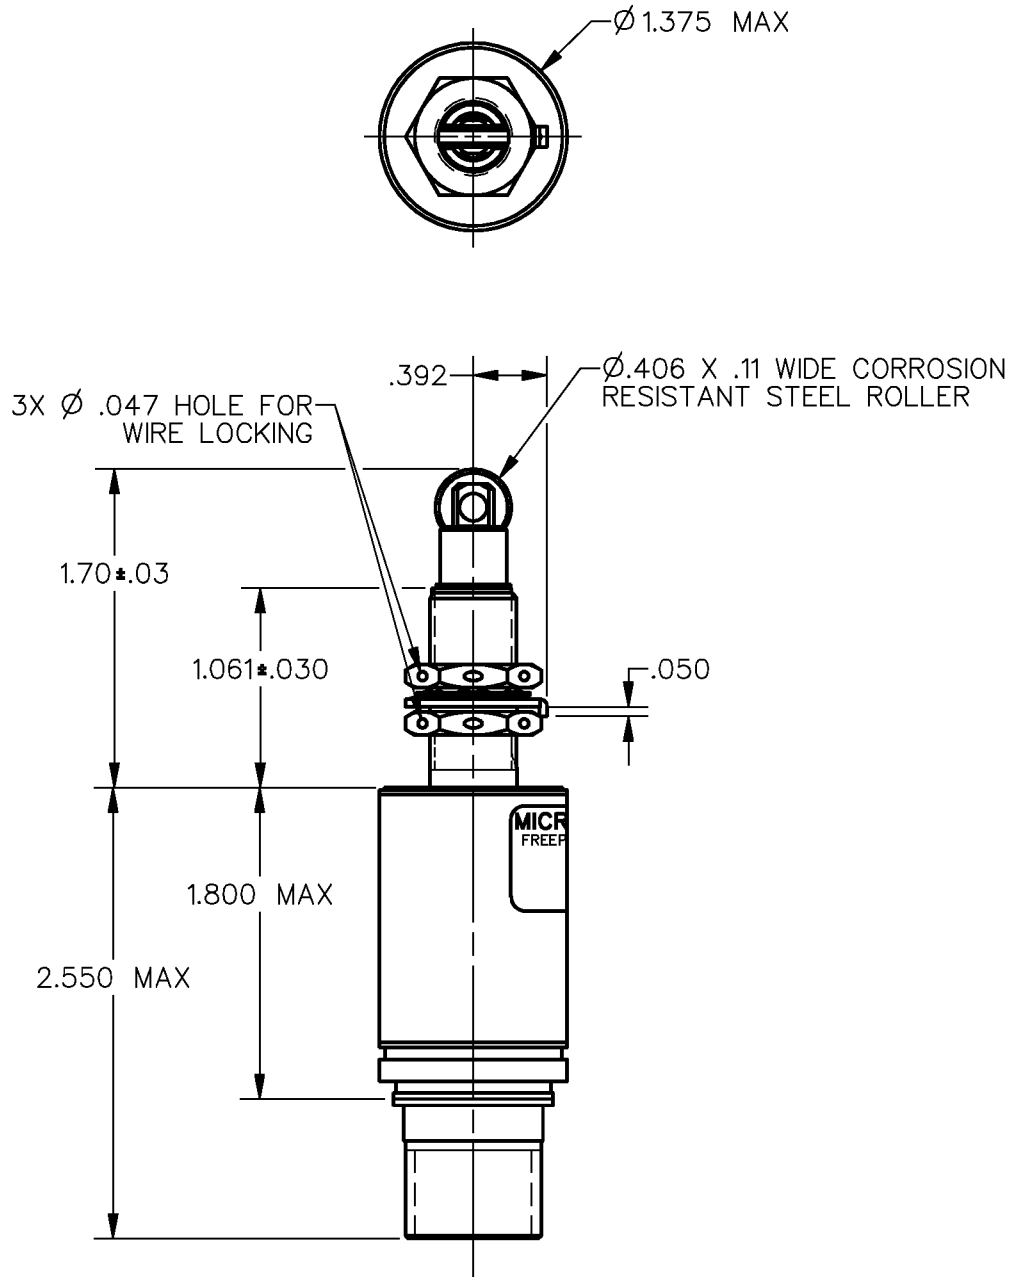

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			THIRD ANGLE PROJECTION	
CHARACTERISTICS			SCALE FULL	
OPERATING FORCE ——— 10 LB MAX			DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE --- 30 LB MAX			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE ——— 1 LB MIN			ONE PLACE (.) ±.030	
PRETRAVEL ——— .020 - .030			TWO PLACE (.00) ±.015	
DIFFERENTIAL TRAVEL ——.020 MAX			THREE PLACE (.000) ±.005	
OVERTRAVEL ——— .200 MIN			ANGLES ±	
ELECTRICAL DATA			WEIGHT 5.1 OZ MAX	
CONTACT ARRANGEMENT 4X SPDT			ANSI Y14.5M-1982 APPLIES	
LOAD	28 VDC			
	SEA LEVEL	70,000 FT		
RES	7	7		
IND	1	1		
LAMP	2	2		

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 5
 - 3 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 4 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 5 - OPERATION IN TEMPERATURE RANGE OF -65°F (-55°C) TO +257°F (+125°C)
 - [△]6 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805