

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929




SWITCH - TOGGLE

CATALOG LISTING



631NT391 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 			ELECTRICAL DATA
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	
631NT391-1	ON	OFF	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"  
631NT391-2	OFF	NONE	ON	
631NT391-3	ON	NONE	ON	
631NT391-21	NONE	OFF	ON	
631NT391-31	NONE	ON	ON	
631NT391-4	MOM OFF	NONE	ON	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"  
631NT391-5	MOM ON	OFF	ON	
631NT391-6	MOM ON	NONE	OFF	
631NT391-7	MOM ON	OFF	MOM ON	
631NT391-8	MON ON	NONE	ON	
631NT391-51	NONE	ON	MOM ON	
631NT391-61	MOM ON	OFF	NONE	

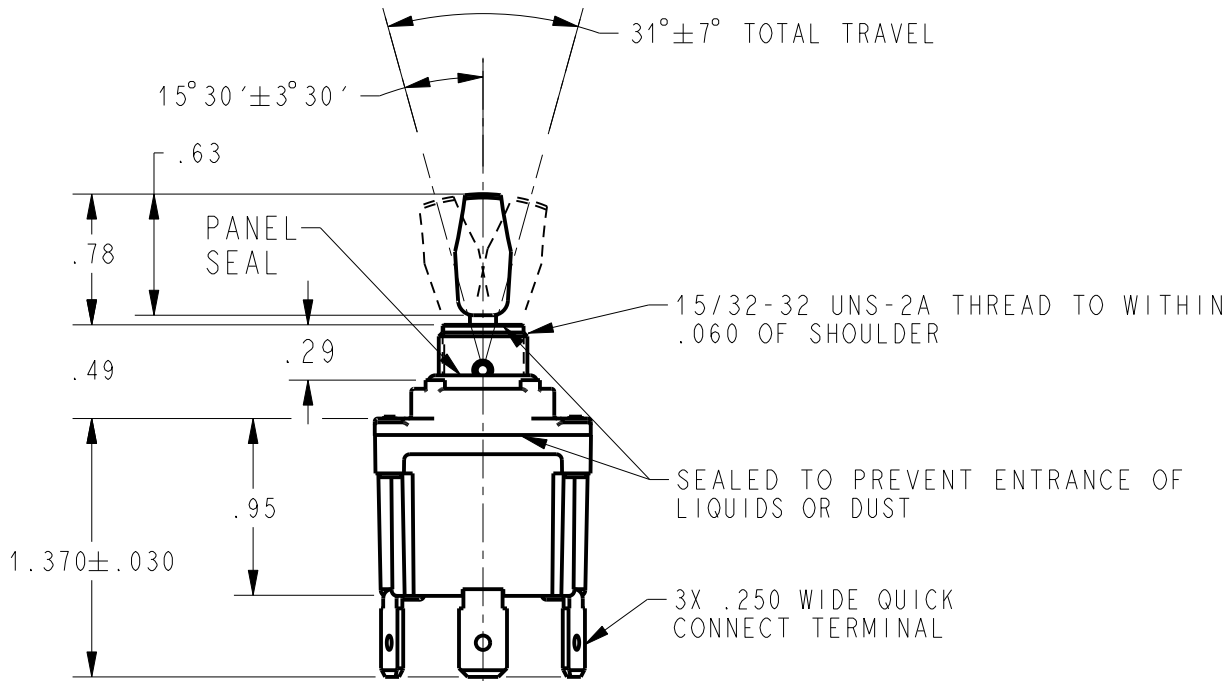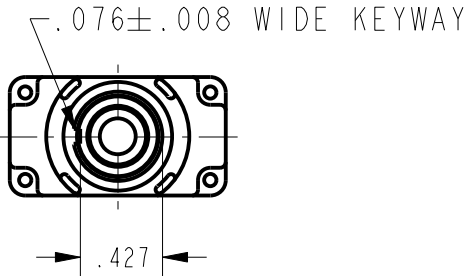

LEVER COLOR CODE 	
COLOR IDENT	COLOR
01	WHITE
02	BLACK
03	BLUE
04	RED
05	GREEN
06	ORANGE
07	GRAY
08	YELLOW
09	LT BLUE

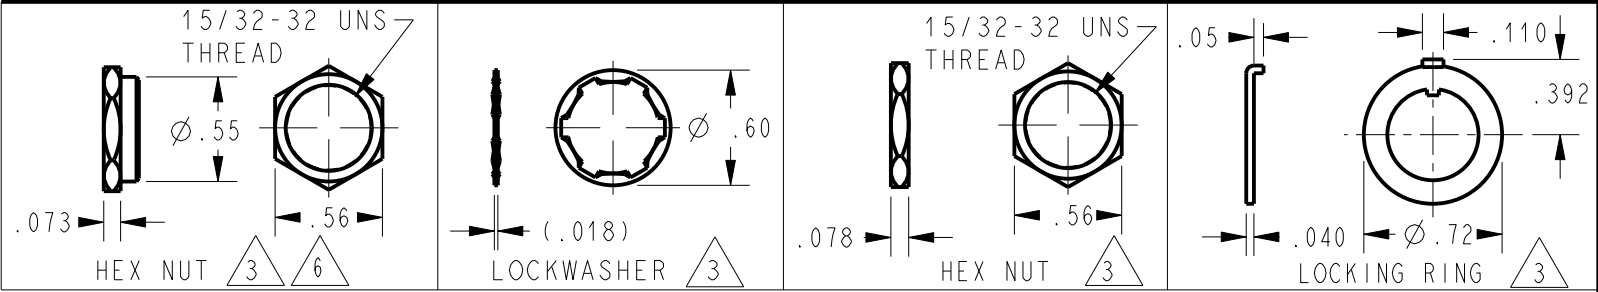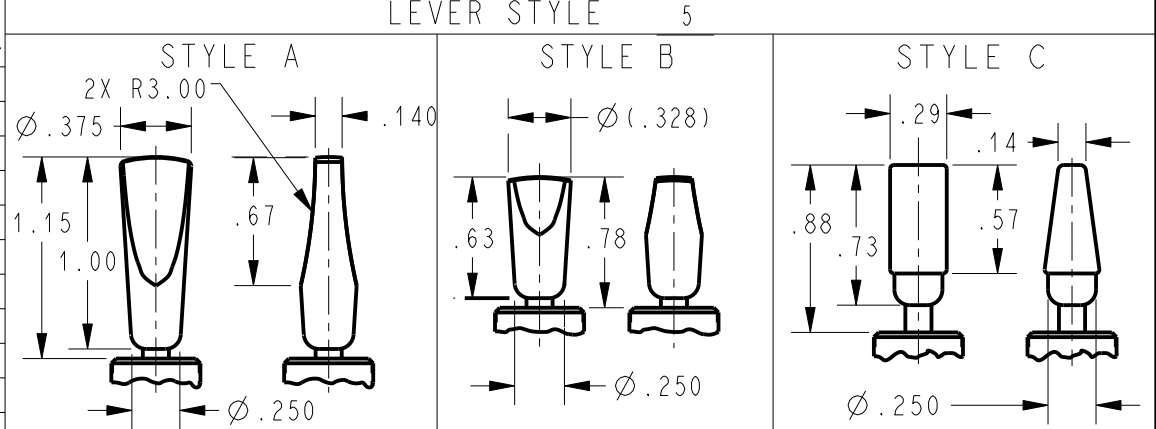

- NOTES
- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
 -  3 - FURNISHED UNASSEMBLED
 -  4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 5 - SUFFIX MUST BE ADDED FOR DESIRED LEVER STYLE AND COLOR (EXAMPLE: 631NT391-3-B08)
 - 6 - BLACK FINISH
 - 7 - TO ORDER WITHOUT HARDWARE ADD (-NH) SUFFIX TO CATALOG LISTING

THIRD ANGLE PROJECTION 	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.07 LB APPROX