

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING

6AT2-T

(M)6AT2-T
ISSUE 2

6AT2-T

M

DRAWING
NUMBER

8

ISSUE

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

REPLACES

RELEASE NO.

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70

70


70

70

70

70

70

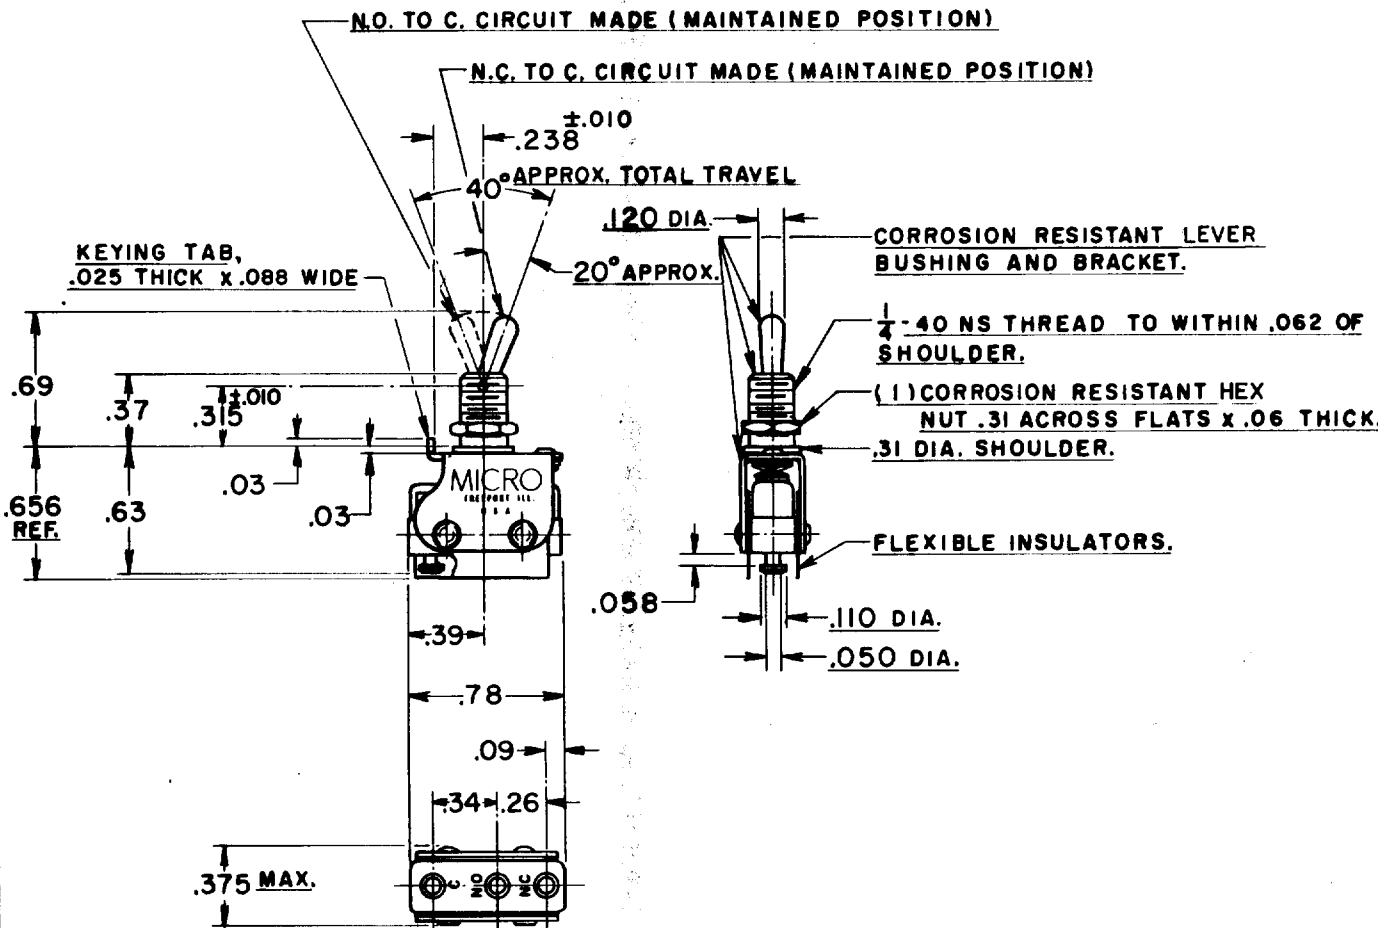

NOTE-

- 1-UNIT INCLUDES (1) CAT. LIST. IISM106-T BASIC SWITCH. (B)
- 2-TERMINALS ARE PLATED FOR SOLDERING.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

CONTACT ARRANGEMENT
S. P. D. T.

BREAK DISTANCE
.010 MIN.

DO NOT SCALE PRINT

250 VAC ————— 5 AMP
30 VOLTS DC RATING

INDUCTIVE ————— SEA LEVEL ————— 3 AMP

50,000 FT. ————— 2.5 AMP

RESISTIVE ————— SEA LEVEL ————— 5 AMP

50,000 FT. ————— 5 AMP

(B)

MAXIMUM INRUSH ————— 24 AMP

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.008

ANGLES ±.008

WEIGHT ——.018 LB.

DRAWN

74-96

CHECK

55

22

SEP

1974

74-96

74-96

74-96